



Tectia Server 6.7 for IBM z/OS

Administrator Manual

19 October 2025

Tectia Server 6.7 for IBM z/OS : Administrator Manual

19 October 2025

Copyright © 2007–2025 SSH Communications Security Corporation

This software and documentation are protected by international copyright laws and treaties. All rights reserved.

ssh® and Tectia® are registered trademarks of SSH Communications Security Corporation in the United States and in certain other jurisdictions.

SSH and Tectia logos and names of products and services are trademarks of SSH Communications Security Corporation. Logos and names of products may be registered in certain jurisdictions.

All other names and marks are property of their respective owners.

No part of this publication may be reproduced, published, stored in an electronic database, or transmitted, in any form or by any means, electronic, mechanical, recording, or otherwise, for any purpose, without the prior written permission of SSH Communications Security Corporation.

THERE IS NO WARRANTY OF ANY KIND FOR THE ACCURACY, RELIABILITY OR USEFULNESS OF THIS INFORMATION EXCEPT AS REQUIRED BY APPLICABLE LAW OR EXPRESSLY AGREED IN WRITING.

For Open Source Software acknowledgements, see appendix *Open Source Software License Acknowledgements* in the *Administrator Manual*.

SSH Communications Security Corporation
Karvaamokuja 2D, FI-00380 Helsinki, Finland

Table of Contents

1. About This Document	9
1.1. Introduction to Tectia Server for IBM z/OS	10
1.2. System Authorization Facility	10
1.3. Sample Files	10
1.4. Documentation Conventions	11
1.4.1. Operating System Names	11
1.5. Customer Support	12
1.6. Terminology	12
2. Installing Tectia Server for IBM z/OS	15
2.1. Preparing for Installation	15
2.1.1. System Requirements	15
2.1.2. Permission Requirements	15
2.1.3. System Limits and Requirements	17
2.1.4. Directories and Data Sets	18
2.1.5. Licensing	19
2.1.6. Uploading Files Required for Installation	19
2.2. Upgrading from Tectia Server for IBM z/OS Version 6.x	21
2.2.1. Uploading Files Required for Upgrade	22
2.2.2. Upgrading to Tectia Server for IBM z/OS 6.7.6	22
2.3. Installing Tectia Server for IBM z/OS	25
2.3.1. Installing the Tectia SSH Assistant ISPF Application	25
2.3.2. Installation Settings and Defaults	27
2.3.3. Generating Product Installation Jobs	34
2.3.4. Running the Product Installation Jobs	38
2.3.5. SSZASST Installation Status	40
2.3.6. Manual pages	49
2.4. Removing the Tectia Server for IBM z/OS Software	51
3. Getting Started with Tectia Server for IBM z/OS	53
3.1. Running the SSH Server (sshd2)	54
3.1.1. Starting the Server	54
3.1.2. Stopping the Server	55

3.1.3. Restarting the Server	56
3.1.4. Querying the Server Version	57
3.1.5. Setting Options for Starting the Server	57
3.2. Running the Certificate Validator (ssh-certd)	58
3.2.1. Starting the Certificate Validator	58
3.2.2. Stopping the Certificate Validator	60
3.2.3. Restarting the Certificate Validator	60
3.2.4. Querying the Certificate Validator Version	61
3.2.5. Setting Options for Starting the Certificate Validator	61
3.3. Environment Variables for Server and Client Applications	61
3.4. Setting Up a Shell User	62
3.4.1. Authenticating Remote Server Hosts	63
3.4.2. Using Password Authentication	63
3.4.3. Using Public-Key Authentication	64
3.5. SSH Connection Status	64
3.5.1. Interpreting ApplData format for TCP listener socket	64
3.5.2. Interpreting ApplData format for TCP connection socket	65
4. Configuring the Server	69
4.1. Server Configuration Files	69
4.1.1. Editing Configuration Files	70
4.1.2. Command-Line Options	70
4.1.3. Running Tectia and OpenSSH on the Same Host	70
4.1.4. IPv6 Support	71
4.2. Defining Subconfigurations	71
4.2.1. Host-Specific Subconfiguration	72
4.2.2. User-Specific Subconfiguration	73
4.3. Configuring Cryptographic Algorithms	73
4.3.1. Configuring Ciphers	73
4.3.2. Configuring MACs	74
4.3.3. Configuring KEXs	75
4.3.4. Configuring Host Key Signature Algorithms	76
4.3.5. Configuring Public Key Signature Algorithms	77
4.3.6. Cryptographic Hardware Support	78
4.3.7. Compressions	80
4.4. Configuring Root Logins	80
4.5. Restricting User Logins	81
4.6. Configuring Code Pages	83
4.7. Defining Subsystems	83
4.8. Auditing	84
4.8.1. Configuring Logging in <code>sshd2</code>	84
4.8.2. Logging SFTP Transactions	84
4.8.3. SMF Auditing	85
4.9. Securing the Server	86

4.9.1. Restrictions to System Administration	86
4.9.2. Restrictions to File Transfer	89
4.9.3. Restrictions to Tunneling	91
4.9.4. Load Control	92
5. Authentication	95
5.1. Supported User Authentication Methods	95
5.2. Using the z/OS System Authorization Facility	96
5.3. Server Authentication with Public Keys in File	97
5.3.1. Defining Server Host Key	97
5.3.2. Generating the Server Host Key Pair	97
5.3.3. Using an OpenSSH Server Host Key	98
5.3.4. Notifying the Users of the Host Key Change	98
5.4. Server Authentication with Certificates	99
5.4.1. Certificates Stored in File	100
5.4.2. Certificates Stored in SAF	101
5.5. User Authentication with Passwords	102
5.6. User Authentication with Public Keys in File	103
5.6.1. Enabling Public-Key Authentication	103
5.6.2. Using the Authorization File	103
5.6.3. Using Keys Generated with OpenSSH	105
5.7. User Authentication with Certificates	106
5.7.1. Certificates Stored in File	106
5.7.2. Certificate User Mapping File	107
5.7.3. Certificates Stored in SAF	108
5.8. User Authentication with Keyboard-Interactive	111
6. System Administration	113
6.1. Shell Access and Remote Commands	113
6.1.1. Supporting the chcp Command	113
6.1.2. Configuring Terminal Data Conversion	114
7. File Transfer Using SFTP	115
7.1. Creating a User for Batch File Transfers	115
7.2. Controlling File Transfer	116
7.2.1. Handling Prematurely Ending File Transfers	116
7.2.2. Controlling Staging during File Transfers	117
7.2.3. Restoring Archived Data Sets	117
8. SSZASST Client Jobs Generator	119
8.1. Client JOBS Settings	120
8.2. Generate Client Jobs	121
8.3. Member-list of Generated Client Jobs	122
9. Secure File Transfer Using Transparent FTP Security	129
9.1. Introduction to Transparent FTP Security	129
9.1.1. Transparent FTP Tunneling	129
9.1.2. FTP-SFTP Conversion	131

9.1.3. Summary of Configuration Steps	132
9.2. Configuring the SOCKS Proxy	132
9.2.1. The <code>ssh-socks-proxy-config.xml</code> configuration file	133
9.2.2. Storing Remote Server Host Keys	136
9.3. Creating the <code>SSHSP</code> User	137
9.4. Running the SOCKS Proxy	137
9.4.1. Starting the SOCKS Proxy	138
9.4.2. Stopping the SOCKS Proxy	139
9.4.3. Querying the SOCKS Proxy Version	140
9.4.4. Reloading <code>ssh-socks-proxy</code> configuration	140
9.4.5. Setting Options for Starting the SOCKS Proxy	140
9.4.6. More Modify Commands for the SOCKS Proxy Server	141
9.5. Configuring FTP	142
9.5.1. Editing the FTP Client Configuration	142
9.5.2. Creating the SOCKS Configuration	143
9.6. Examples of Transparent FTP Security	143
9.6.1. System-Wide Transparent FTP Tunneling with Fallback	144
9.6.2. JCL-Specific Transparent FTP Tunneling or FTP-SFTP Conversion	144
10. Tunneling	147
10.1. Local Tunnels	147
10.1.1. Tunneling TN3270	149
10.2. Remote Tunnels	149
10.3. Agent Forwarding	150
11. Troubleshooting Tectia Server for IBM z/OS	151
11.1. Debugging Tectia Server for IBM z/OS	151
11.1.1. Setting the Debug Level	152
11.1.2. Debugging Using USS shell	153
11.1.3. Debugging File Transfer	153
11.2. Solving Problem Situations	154
11.2.1. Using the OMVS Shell	154
11.2.2. Common MVS Error Messages	155
11.2.3. Common Tectia Server for IBM z/OS Error Messages	155
11.2.4. Exceeding Maximum CPU Time	156
11.2.5. Auxiliary Storage Shortage	156
11.2.6. SSHD2 Cannot Be Started as a Started Task	157
11.2.7. File Transfer Server Log Messages with Wrong Timestamps	157
A. Man Pages	159
<code>ssh-certd</code>	160
<code>ssh_certd_config</code>	163
<code>ssh-dummy-shell</code>	169
<code>ssh-externalkeys</code>	170
<code>sshd-check-conf</code>	172
<code>sshd2</code>	174

sshd2_config	180
sshd2_subconfig	205
sshregex	208
B. Default Configuration Files	217
B.1. Default <code>sshd2_config</code> Configuration File	217
B.2. Default <code>ssh_certd_config</code> Configuration File	225
C. IPv6 Support on Tectia Server and client tools for IBM z/OS	227
C.1. Server Configuration and Use	227
C.2. Client Configuration and Use	230
C.2.1. Connection Broker	230
C.2.2. Client	231
C.2.3. Tunneling	232
D. Running the Server and SOCKS Proxy on Multiple TCP/IP Stack z/OS	235
D.1. Running Two Servers on a Dual TCP/IP Stack	235
D.2. Running Two SOCKS Proxies on a Dual TCP/IP Stack	236
D.3. Connecting via Different TCP/IP Stacks with Tectia Clients	240
E. Console Messages	241
F. Log Messages	249
F.1. User Authentication - Common	249
F.2. User Authentication - Host-Based	251
F.3. User Authentication - Keyboard-Interactive Password	255
F.4. User Authentication - Keyboard-Interactive	256
F.5. User Authentication - Password	257
F.6. User Authentication - Public Key	260
F.7. Certificate-Specific Code	264
F.8. Agent Forwarding	264
F.9. Session Channels	265
F.10. SSH1 Agent Forwarding	269
F.11. Port Forwarding	270
F.12. Common Code	272
F.13. Host Key I/O	272
F.14. Cryptography Support	272
F.15. General Server Log Messages	273
F.16. SFTP	280
G. Audit Messages	291
H. Open Source Software License Acknowledgements	313
I. Setting ICSF Permissions in RACF for Cryptographic Hardware Support	319
J. Offloading SSHD2 with zIIP	321
Index	323

Chapter 1 About This Document

This document contains instructions on installing and using Tectia Server for IBM z/OS on IBM mainframes.

To fully utilize the information presented in this document, you should be familiar with Unix System Services (USS) of z/OS and Unix concepts in general.

This document contains the following information:

- Installing Tectia Server for IBM z/OS
- Getting started with Tectia Server for IBM z/OS
- Server configuration settings
- Server and user authentication
- System administration
- Secure file transfer using SFTP
- Setting up transparent FTP security
- Secure Shell tunneling
- Troubleshooting
- Appendices

Tectia Server for IBM z/OS Product Description contains important background information on the Tectia client/server solution, and we recommend that you read it before installing and starting Tectia Server for IBM z/OS.

Tectia Server for IBM z/OS User Manual gives instructions on using the Tectia client tools on z/OS for secure system administration and secure file transfer.

Tectia Server for IBM z/OS Quick Start Guide gives instructions for getting started with Tectia Server for IBM z/OS on IBM mainframes.

The *Tectia man pages* describe the commands and configuration file options in detail. The man pages are located in the `man` subdirectory of the Tectia installation directory. The server man pages are also contained in [Appendix A](#) of this manual.

In addition, the following documents will aid in understanding the Secure Shell protocol and using the product:

- general literature about Secure Shell, e.g. *SSH, The Secure Shell: The Definitive Guide* by O'Reilly
- Secure Shell RFCs 4250-4256 at <http://www.ietf.org/rfc/>

1.1 Introduction to Tectia Server for IBM z/OS

Tectia Server for IBM z/OS is a client/server security solution based on the Secure Shell protocol. It provides secure file transfer, secure shell access, remote shell command execution, and TCP and FTP tunneling. Together with Tectia Client on Windows, it provides secure tunneling for TN3270 connections.

The server component of Tectia Server 6.7 for IBM z/OS is based on Tectia Server 4.3 but it has the same advanced file transfer features as Tectia Server 6.7 on Unix platforms.

The client components of Tectia Server 6.7 for IBM z/OS are based on Tectia Client 6.7 and they support the same advanced file-transfer features as Tectia Client 6.7 on Unix platforms.

Tectia Server 6.7 for IBM z/OS runs on z/OS (the supported z/OS versions are listed in [Section 2.1.1](#)). It is installed to z/OS Unix System Services (USS), but it can be run in the native environment (hereafter MVS) and process files of the native file system.

1.2 System Authorization Facility

Tectia Server for IBM z/OS uses the System Authorization Facility (SAF) interface to the system security product and will thus work together with RACF, ACF2, and Top Secret. ACF2 and Top Secret are products from Computer Associates. This document and sample files show RACF commands.

1.3 Sample Files

After installation, Tectia Server for IBM z/OS includes the following samples that complement this document:

- `<HLQ>.V676.SAMPLIB`: a PDS containing JCL jobs for a variety of SSH tasks
- `/opt/tectia/doc/zOS/samples`: a directory containing USS environment settings

Before running the samples, you should adapt them to your environment. For example, change the user, file, and machine names to those of your system.

The tasks described by the samples can of course be accomplished by other means, for example by using the shell.

1.4 Documentation Conventions

The following typographical conventions are used in Tectia documentation:

Table 1.1. Documentation conventions

Convention	Usage	Example
Bold	Tools, menus, GUI elements and commands, command-line tools, strong emphasis	Click Apply or OK .
→	Series of menu selections	Select File → Save
Monospace	Command-line and configuration options, file names and directories, etc.	Refer to <code>readme.txt</code>
<i>Italics</i>	Reference to other documents or products, URLs, emphasis	See <i>Tectia Client User Manual</i>
<i>Monospace</i> <i>Italics</i>	Replaceable text or values	<code>rename oldfile newfile</code>
#	In front of a command, # indicates that the command is run as a privileged user (root).	# <code>rpm --install package.rpm</code>
\$	In front of a command, \$ indicates that the command is run as a non-privileged user.	\$ <code>sshg3 user@host</code>
\	At the end of a line in a command, \ indicates that the command continues on the next line, but there was not space enough to show it on one line.	\$ <code>ssh-keygen-g3 -t rsa \ -F -c mykey</code>



Note

A Note indicates neutral or positive information that emphasizes or supplements important points of the main text. Supplies information that may apply only in special cases (for example, memory limitations, equipment configurations, or specific versions of a program).



Caution

A Caution advises users that failure to take or to avoid a specified action could result in loss of data.

1.4.1 Operating System Names

When the information applies to several operating systems versions, the following naming systems are used:

- **Unix** refers to the following supported operating systems:

- HP-UX
- IBM AIX
- Red Hat Linux, SUSE Linux
- Linux on IBM System z
- Solaris
- IBM z/OS, when applicable; as Tectia Server for IBM z/OS is running in USS and uses Unix-like tools.
- **z/OS** is used for IBM z/OS, when the information is directly related to IBM z/OS versions.
- **Windows** refers to all supported Windows versions.

1.5 Customer Support

All Tectia product documentation is available at <https://www.ssh.com/manuals/>.

FAQ with how-to instructions for all Tectia products are available at <https://answers.ssh.com/>.

If you have purchased a maintenance agreement, you are entitled to technical support from SSH Communications Security. Review your agreement for specific terms and log in at <https://support.ssh.com/>.

Information on submitting support requests, feature requests, or bug reports, and on accessing the online resources is available at <https://support.ssh.com/>.

1.6 Terminology

The following terms are used throughout the Tectia Server for IBM z/OS documentation.

client computer

The computer from which the Secure Shell connection is initiated.

Connection Broker

The Connection Broker is a component included in the Tectia Server for IBM z/OS client tools. It consists of the **ssh-broker-g3** process and the **ssh-broker-ctl** control process. The Connection Broker handles all cryptographic operations and authentication-related tasks.

FTP-SFTP conversion

Tectia SOCKS Proxy can automatically capture FTP connections on the client and convert them to SFTP and direct them to an SFTP server running Tectia Server, or another vendor's Secure Shell server software.

host key pair

A public-key pair used to identify a Secure Shell server. The private key file is accessible only to the server. The public key file is distributed to users connecting to the server.

remote host

Refers to the other party of the connection, [client computer](#) or [server computer](#), depending on the viewpoint.

scpg3

A command-line Secure Shell client for secure copy. **scpg3** is a secure replacement for remote copy (**rcp**) and provides easy secure non-interactive file transfers.

Secure Shell client

A client-side application that uses the Secure Shell version 2 protocol, for example [scpg3](#), [sftp3](#), or [sshg3](#) of Tectia client tools for z/OS.

Secure Shell server

A server-side application that uses the Secure Shell version 2 protocol.

server computer

The computer on which the Secure Shell service is running and to which the Secure Shell client connects.

SFTP server

A server-side application that provides a secure file transfer service as a subsystem of the Secure Shell server.

sftp3

A command-line Secure Shell client for secure file transfer. **sftp3** is a secure replacement for FTP and provides a user interface for interactive file transfers and a batch mode for unattended file transfers.

SOCKS Proxy

Tectia SOCKS Proxy is used for [transparent FTP tunneling](#) and [FTP-SFTP conversion](#). It consists of the **ssh-socks-proxy** process and **ssh-socks-proxy-ctl** control process.

sshd2

The main Secure Shell server daemon of Tectia Server for IBM z/OS.

sshg3

A command-line Secure Shell client that can be used as a secure replacement for Telnet and other unsecured terminal applications. **sshg3** can also be used for remote command and job execution, and for creating secure tunnels for TCP applications.

Tectia client tools for z/OS

Tectia Server for IBM z/OS includes client tools, which consist of the [Connection Broker](#), Secure Shell command-line tools ([sshg3](#), [scpg3](#), [sftp3](#)), auxiliary command-line tools, and the [SOCKS Proxy](#).

Tectia client/server solution

The Tectia client/server solution consists of Tectia Client, Tectia Server, and Tectia Server for IBM z/OS (including the Tectia Server for IBM z/OS client tools).

Tectia Server for IBM z/OS

Tectia Server for IBM z/OS is a server-side component where Secure Shell clients connect to. It consists of two processes: **sshd2** and **ssh-certd** (the Certificate Validator). Tectia Server for IBM z/OS provides normal Secure Shell connections and supports secure TN3270 connectivity, transparent FTP tunneling, FTP-SFTP conversion and enhanced file transfer features on IBM z/OS.

Tectia SSH Assistant

The Tectia SSH Assistant ISPF application provides an interface for installing, configuring and running Tectia Server for IBM z/OS using traditional MVS tools (ISPF and JCL), without requiring the use of the Unix shell.

transparent FTP tunneling

An FTP connection transparently encrypted and secured by a Secure Shell tunnel.

tunneled application

A TCP application secured by a Secure Shell connection.

user key pair

A public-key pair used to identify a Secure Shell user. The private key file is accessible only to the user. The public key file is copied to the servers the user wants to connect to.

Chapter 2 Installing Tectia Server for IBM z/OS

This chapter contains instructions on installing Tectia Server for IBM z/OS.

2.1 Preparing for Installation

This section lists the necessary prerequisites for installing Tectia Server for IBM z/OS.

2.1.1 System Requirements

The following operating system versions are supported as Tectia Server for IBM z/OS platforms:

- z/OS 2.5 and 3.1

The following *minimum* hardware is required:

- IBM System z10 (or later)
- 1 GB RAM for hundreds of simultaneous tunnels
- 200 MB free disk space, 200 cylinders (includes client components)

During installation, an additional 300 MB of temporary disk space is required.

- TCP/IP connection

2.1.2 Permission Requirements

Before Installation

Before you start installing Tectia Server for IBM z/OS, make sure the following requirements are met:

File system requirements

Write access to the `/opt` directory is required during the installation.

User account requirements for installing the server

- The user account installing the product must have an OMVS segment, UID 0 and RACF SPECIAL privilege.

User account requirements for running the server

- The user account running the server must have an OMVS segment and the UID 0.
- If the `BPX.DAEMON FACILITY` class profile is defined, the user must have read access to it.

Requirements for user accounts to support access via Tectia Server

- *Required:* An OMVS segment

Users who are to have access to in-bound SFTP or SSH require an OMVS segment defined in their profile. If a shell program is specified, it must be the pathname of an executable z/OS UNIX shell program; if omitted, the default shell program defined in z/OS UNIX customization is used.

- *Optional:* A home directory. It is required if public key user authentication is used or if the account requires user-specific configuration, for example, environment variables for the file transfer subsystem.

Requirements for user accounts that run Tectia client programs

- *Required:* An OMVS segment
- *Optional:* A home directory. It is required if public key user authentication is used or if the account requires user-specific configuration, for example, profiles for remote hosts.

Library requirements

- The Tectia SSH Assistant application requires the Rexx runtime or Rexx alternate libraries to execute. The Rexx Alternate Library SEAGALT (for example, `FAN140.SEAGALT` or `IBM.REXX.SEAGALT`, etc.), which is shipped as part of z/OS since version 1.9, may be used to satisfy this requirement. SEAGALT must be available in the linklist or in a STEPLIB allocated to your TSO session.
- *Optional:* By default SSZASST requires SDSF to operate. This dependency to SDSF can be removed in the Tectia SSH Assistant's Installation settings and defaults (0 SETM) panel, using option 0 (0.0) and changing the setting. TSO console ==> Y.

Permissions for storing keys in SAF

If the server host key or the user keys are going to be stored in the System Authorization Facility (SAF), additional permissions are required. See [Section 5.2](#) for more information.

During Installation

The following additional requirements will be handled during the installation with Tectia SSH Assistant:

- The Tectia SSH Assistant ISPF application uses the **extattr** command to make the server program, `/opt/tectia/sbin/sshd2`, program-controlled. To issue the command, the user account running the setup must have read access to the `BPX.FILEATTR.PROGCTL` facility. These requirements will be fulfilled during the installation by running the job generated by the Tectia SSH Assistant option [1.1 INSTUSER](#).
- It is recommended that a user account, `SSHD2`, is created for running Tectia Server for IBM z/OS. This will be done during the installation by running the job generated by the Tectia SSH Assistant option [1.3 ADDSSHDU](#).
- `CEE.SCEERUN` and `CEE.SCEERUN2` libraries must be available in `LPALIB` or `LNKLST`, and `CEE.SCEERUN2` must be program-controlled. These requirements will be fulfilled during the installation by running the job generated by the Tectia SSH Assistant option [1.2 CPGMCTL](#).
- The server must be allowed to listen to port 22 (or other configured Secure Shell port). The access will be granted during the installation by running the job generated by the Tectia SSH Assistant option [1.6 SERVAUTH](#).

2.1.3 System Limits and Requirements

Check the definitions in `BPXPRMxx`. The following guidelines are approximate and apply to both the server and the clients.

Tectia requires an address space size of at least 200 MB (`MAXASSIZE`).

Each concurrent connection typically needs 2 to 3 processes (`MAXPROCSYS`, `MAXPROCUSER`). The user limit may require adjusting if many concurrent connections are run under one user ID.

For each concurrent connection Tectia requires:

- file descriptors (`MAXFILEPROC`)
- IPv4 sockets (`MAXSOCKET` for file system type INET)
- IPv6 sockets (`MAXSOCKET` for file system type INET6)
- AF_UNIX sockets (`MAXSOCKET` for file system type UDS)

The limits suggested in the *z/OS UNIX System Services Planning* book are typically adequate except maybe for AF_UNIX. Tectia uses 3 to 4 AF_UNIX sockets for each concurrent connection.

Note that Tectia is not defined to *z/OS Workload Manager (WLM)* and runs the same goals as *UNIX System Services (USS)*. If you feel the need to make changes to *USS* goals, please consult the *IBM Redbook System Programmer's Guide to: Workload Manager*, Chapter *UNIX System Services considerations*.

2.1.4 Directories and Data Sets

USS

The directory structure under Unix System Services (USS) is shown below. The space requirements are approximate upper limits.

`/opt/tectia symlink`

Symbolic link to the zFS (Space: 200 MB, 200 Cyls, read/write) that contains executable binaries, setup scripts, configuration files, server key files, manual pages, documentation, license agreement, example JCL scripts.

After installation, Tectia Server for IBM z/OS consists of a directory structure under the zFS file system defined for it. The zFS is mounted onto a mount point defined at installation, and pointed to by the `/opt/tectia symlink`.

`$HOME/.ssh2`

Each z/OS user account that is accessed via Tectia Server or that runs SSH client programs normally has a USS home directory (`$HOME`, for example, `/u/home1/username`) and under it a `.ssh2` subdirectory. The `.ssh2` directory contains the user's configuration files and keys. The home directory is required if public key user authentication is used and if user-specific configuration is needed.

Space: 128 kB, read/write

The runtime programs of Tectia Server for IBM z/OS create the `$HOME/.ssh2` directories as needed. If you want these directories to be a link to some other spot in your directory hierarchy, create the link before running the program.

`/tmp`

Contains server process ID files and the default `STDOUT` and `STDERR`.

Space: 256 kB (300 MB during installation), read/write/sticky.

The `/tmp` directory must exist in advance and it must be user-writable and have the sticky bit on.

The sticky attribute for `/tmp` can be checked by observing the output of `ls` and verifying that the letter `t` is present in the permissions field:

```
:> ls -ld /tmp/.
drwxrwxrwt  89 WEBSRV   SYS1        49152 Apr 11 14:43 /tmp/.
```

If the permissions differ from `rwxrwxrwx`, they must be adjusted with `chmod`:

```
:> chmod 1777 /tmp/.
```

`/tmp/ssh-username`

Contains users' temporary files used in Secure Shell agent forwarding.

The agent forwarding status files are temporary and valid only while the actual user process is running.

Space: 12 kB for each user, read/write

MVS

Although this version of Tectia Server for IBM z/OS must be installed in a USS file system and use the directory structure shown above, the server supports the transfer of MVS files and all the programs can be executed in JCL by `BPXBATCH`, `BPXBATSL`, and `oshell`.

2.1.5 Licensing

Tectia Server and client tools for z/OS require valid licenses, which are provided separately.

Tectia Client licenses are backwards compatible, a license with a greater number will be able to run clients with versions less than the license. However, Tectia Server license are not backwards compatible, the Tectia Server must be run with matching versions.



Note

The installation packages do not contain license files. The license files must be requested separately from SSH Licensing or downloaded from the Customer Download Center.

For instructions on uploading the licenses to your z/OS host, see [Section 2.1.6](#).

2.1.6 Uploading Files Required for Installation



Note

If you have an existing installation of Tectia Server for IBM z/OS version 6.x, you can skip to [Section 2.2](#).

The following files need to be uploaded (you can find detailed instructions below) in binary mode to your z/OS host:

- *Tectia SSH Assistant XMIT file* `SSZASST.V060706.BXXXX.XMIT`

Extract the XMIT file from `sszasst-6.7.6.XXX.zip` to a temporary location on your local machine.

(Replace the 'x's in the file names with the correct build number.)

Upload the file with the following data set attributes:

Data set organization: RECFM=FB
 Record length: LRECL=80
 Space allocation unit: TRACKS
 Primary space allocation: PRIMARY=15

- *Tectia Server for IBM z/OS product tar archive ssh-tectia-server-zos-6.7.6.XXX-ibmzos.tar.z*

Extract the product tar archive from `tectia-server-zos-6.7.6.XXX-ibmzos-comm.tar` to a temporary location on your local machine.

The product tar archive `ssh-tectia-server-zos-6.7.6.XXX-ibmzos.tar.z` can be transferred to either the Unix file system or to a sequential data set. Approximately 59M or 130 cylinders are required.

You can use the following data set attributes:

Data set organization: RECFM=U
 Record length: LRECL=0
 Space allocation unit: CYLINDERS
 Primary space allocation: PRIMARY=130

- *Product licenses tar archive*

Check if you have some Secure Shell software, for example earlier versions of Tectia products or IBM Ported Tool for z/OS (OpenSSH), running on the machine where you are planning to install the new Tectia version.

In the following sections we provide you with the required commands for uploading the files using OpenSSH, FTP or FTP via cURL.

Uploading Installation Files Using OpenSSH

If an OpenSSH server is already running on the host, use `sftp` to transfer the installation files in binary format to the USS file hierarchy, from where the XMIT file can be copied to a data set with the `cp` command:

```
cp -P 'recl=80,blksize=6160,space=(trk,(15,15))' \
SSZASST.V060706.Bxxxx.XMIT //SSZASST.V060706.Bxxxx.XMIT
```

(Replace the `xxxx` in the XMIT file name with the correct build number.)

Before installing Tectia Server 6.7 for IBM z/OS, stop any OpenSSH servers running on port 22, or change their listener port. You do not need to uninstall the OpenSSH software.

Proceed with the installation normally as described in [Section 2.3](#).

Uploading Installation Files Using FTP

Connect to your z/OS host and change file transfer mode to binary:

```
ftp USER@zoshost
ftp> binary
```

Upload the Tectia SSH Assistant XMIT file:

```
ftp> quote site RECFM=FB LRECL=80 TRACKS PRIMARY=15
ftp> put SSZASST.V060706.Bxxxx.XMIT
```

(Replace the xxxx in the XMIT file name with the correct build number.)

Upload the product tar archive (extracted from `tectia-server-zos-6.7.6.XXX-ibmzos-comm.tar`):

```
ftp> quote site RECFM=U LRECL=0 CYLINDERS PRIMARY=130
ftp> put ssh-tectia-server-zos-6.7.6.xxx-ibmzos.tar.Z SSZ.V676xxx.TARZ
```

(Replace the xxx in the tar archive and destination data set names with the correct build number.)

Upload the licenses tar archive to the user's home directory:

```
ftp> cd /u/user/
ftp> put licences.tar
ftp> quit
```

Uploading Installation Files Using FTP via cURL

Upload the Tectia SSH Assistant XMIT file:

```
curl -v -u USER -Q 'site RECFM=FB LRECL=80 TRACKS PRIMARY=15' \
-T SSZASST.V060706.Bxxxx.XMIT ftp://zoshost
```

(Replace the xxxx in the XMIT file name with the correct build number.)

Upload the product tar archive (extracted from `tectia-server-zos-6.7.6.XXX-ibmzos-comm.tar`):

```
curl -v -u USER -Q 'site RECFM=U LRECL=0 CYLINDERS PRIMARY=130' \
-T ssh-tectia-server-zos-6.7.6.xxx-ibmzos.tar.Z \
ftp://zoshost/SSZ.V676xxx.TARZ
```

(Replace the xxx in the tar archive and destination data set names with the correct build number.)

Upload the licenses tar archive to the user's home directory:

```
curl -v -u USER -T licences.tar ftp://zoshost//u/user
```

2.2 Upgrading from Tectia Server for IBM z/OS Version 6.x



Note

Before starting the upgrade, take backups of any previous installation binaries you may want to retain for possible future use.

2.2.1 Uploading Files Required for Upgrade

Upload the *Tectia SSH Assistant XMIT file* (SSZASST.V060706.BXXXX.XMIT), the *Tectia Server for IBM z/OS product tar archive* (ssh-tectia-server-zos-6.7.6.XXX-ibmzos_1_13.tar.Z), and the *licenses tar archive* to your z/OS system.

SSZASST.V060706.BXXXX.XMIT is included in `sszassst-6.7.6.XXX.zip` and the product tar archive is included in the `tectia-server-zos-6.7.6.XXX-ibmzos_1_13-comm.zip` archive.

You can transfer the files directly to DASD using FTADV or site commands to set the data set attributes. In the following we provide you with example commands for uploading the files using Tectia and OpenSSH clients.

Using Tectia Client

```
sftpz3 USER@zoshost ①
sftp> binary ②
sftp> sput SSZASST.V060706.BXXXX.XMIT /ftadv:LR=80,REC=FB,SU=TRKS,PRI=15,T=PS,S=NO, \
F=STREAM/ __SSZASST.V060706.BXXXX.XMIT ③
sftp> sput ssh-tectia-server-zos-6.7.6.XXX-ibmzos.tar.Z /ftadv:RECFM=U, \
LRECL=0,CYLINDERS,PRI=130,T=PS,S=NO/ __SSZ.V662XXX.TARZ ④
sftp> sput licenses-6.7.tar ⑤
```

- ① Connect to `zoshost`.
- ② Set file transfer mode to binary.
- ③ Upload the XMIT file using FTADV to set the data set attributes. (Replace the `XXXX` in the XMIT file name with the correct build number.)
- ④ Upload the product tar archive using FTADV to set the data set attributes. (Replace the `XXX` in the tar archive and destination data set names with the correct build number.)
- ⑤ Upload the licenses tar archive.

Using OpenSSH Client

```
sftp USER@zoshost
sftp> put SSZASST.V060706.BXXXX.XMIT /ftadv:LR=80,REC=FB,SU=TRKS,PRI=15,T=PS,S=NO, \
F=STREAM,X=BIN/ __SSZASST.V060706.BXXXX.XMIT
sftp> put ssh-tectia-server-zos-6.7.6.XXX-ibmzos.tar.Z /ftadv:RECFM=U, \
LRECL=0,CYLINDERS,PRI=130,T=PS,S=NO,X=BIN/ __SSZ.V662XXX.TARZ
sftp> put licenses-6.7.tar
```

2.2.2 Upgrading to Tectia Server for IBM z/OS 6.7.6

Preparing for the Product Upgrade

After you have uploaded the files required for the upgrade, do the following on your z/OS host:

1. Receive the Tectia SSH Assistant application data set (replace the xxxx in the name with the correct build number):

```
TSO RECEIVE INDSN(sszassst.V060706.Bxxxx.XMIT)
```

Press **Enter** repeatedly to page through the command output and when prompted, press **R** to replace the existing data set.

You should see this message in the end of the command output: `Restore successful to dataset 'prefix.SSZASST.PDS'`.

2. Set up the application libraries by EXECing the REXX script `$RECEIVE` that is inside the restored data set:

```
TSO EXEC 'prefix.SSZASST.PDS($RECEIVE)'
```

You should see this message in the end of the command output: `Restore successful to dataset 'prefix.SSZASST.SKEL'`.

3. EXEC the Tectia SSH Assistant application:

```
TSO EXEC 'prefix.SSZASST.CEXEC(SSZ)'
```

4. Update the following settings in the Tectia SSH Assistant ISPF application:

- **0.2 SETI:** `version` and `Tarball`. Make sure you enter the correct `version`. It must correspond with the untarred directory name of the product version you are upgrading to.



Tip

You can check the current `version` by pressing `PF1` (help).

- **0.3 SETO:** `DSName` and `Mountpoint`



Note

You only have to type in the `version`. For the other fields (`Tarball`, `DSName` and `Mountpoint`) it is enough to blank the field out and press **Enter**. A suitable value based on the `version` will automatically be added to the field.

For more information on all the available settings, see [Section 2.3.2](#).

5. Generate the required installation jobs. When updating an existing working installation, it is enough to successfully run jobs 7 to 13. When new licenses are to be installed, also job 14 must be run. To generate all the installation jobs at once, use the **1.99 GENALL** option.

For descriptions of the installation jobs, see [Section 2.3.3](#).



Note

If your installation has CEX cards, and you are updating from version 6.5.x or older, you must also run job 5.

Completing the Product Upgrade

The installing user must next do the following to complete the upgrade:

1. In Tectia SSH Assistant, go to **0 SETM** → **4 SETL** and define the installation log data set from which to extract the installation settings:

```
Logfile    ==> '<prefix>.SSZ.INSTALL.LOG'
```

2. In **0.2 SETI** and **0.3 SETO**, check that the installation input and output settings are correct.
3. In **2.1 JOBS**, submit the following installation jobs:
 - 07 (SAVE) - Save key data from previous installation (generated by action **1.7 SAVE**).



Note

If the Certificate server is running, running this job may result in error code 0256. You can ignore the error.

- 08 (ZFSA) - Define the installation zFS: allocate a new zFS data set, format and mount it onto the defined mount point, using names and attributes given in the settings panel **0.3 SETO** (generated by action **1.8 ZFS**).
- 09 (LOAD) - Load the installation zFS (generated by action **1.9 LOAD**).
- 10 (REST) - Restore key data from previous installation (generated by action **1.10 RESTORE**).
- 11 (OPTT) - Create the `/opt/tectia` symlink (generated by action **1.11 SYMLINK**).



Note

This job will delete a previously existing `/opt/tectia` symlink. However, if the existing `/opt/tectia` is a directory and not a symlink, this job will fail. This is to avoid the accidental deletion of directory contents that may not have been backed up.

To delete the `/opt/tectia` directory, use the `-r` option with the `rm` command. Note that to delete the directory, you must first unmount the existing mount point.

- 12 (LIBS) - Create PDS libraries for sample jobs and parameters (generated by action **1.12 SSZLIBS**).

- 13 (PROC) - Set up started task procedures (generated by action [1.13 PROCLIB](#)).
- 14 (LICN) - Install new licenses (generated by action [1.14 LICENCE](#)).



Note

If the installing user is not allowed to run the server, re-grant them console rights by running job 01 (IUSR) (generated by action [1.1 INSTUSER](#)) again. The installing user must then log on again to acquire the new console rights.

4. To restart the server, go to **4 TASK → 1 TSRV** and enter **3 TSRVR**.

To check the version of the running server, enter **5 TSRVQV**.

5. *(Optional)* You can use job U01ZDEL, accessible via the Tectia SSH Assistant main menu option 5 UTIL, to delete the previous installation ZFS. The job unmounts the installation ZFS, deletes the mount point, and deletes the installation ZFS data set (i.e., everything under /opt/tectia). Only the PROCs and samples will be retained.



Caution

Job U01ZDEL uses the previous version number, so if you run "Generate installation jobs" (1 GENJ) multiple times for the same release, the job will remove the ZFS of the current installation.

2.3 Installing Tectia Server for IBM z/OS

Installing Tectia Server for IBM z/OS consists of the following steps:

1. Uploading the files required for the installation to the z/OS host. See [Section 2.1.6](#).
2. Installing the Tectia SSH Assistant ISPF application. See [Section 2.3.1](#).
3. Defining the required settings for the installation. See [Section 2.3.2](#).
4. Generating the product installation jobs. See [Section 2.3.3](#).
5. *As the installing user:* submitting the installation jobs. See [Section 2.3.4](#).

2.3.1 Installing the Tectia SSH Assistant ISPF Application

The Tectia SSH Assistant (SSZASST) ISPF application provides an interface for installing and configuring Tectia Server for IBM z/OS and its client tools. It is designed to simplify the process of installing the product tar archive appropriately and performing the multiple configuration tasks required using traditional MVS tools (ISPF and JCL), without requiring the use of the Unix shell.

1. If you have not yet done so, transfer the Tectia SSH Assistant application XMIT file and the Tectia Server for IBM z/OS product tar archive in binary mode to your z/OS system. For instructions, see [Section 2.1.6](#).
2. On the z/OS host, receive the Tectia SSH Assistant data set via the following command (replace the xxxx in the XMIT file name with the correct build number):

```
TSO RECEIVE INDSN(sszassst.V060706.Bxxxx.XMIT)
```



Note

In response to the RECEIVE prompt, you may enter the usual parameters to control the creation of the received data set, or just press enter to take the defaults and create a data set called *prefix.SSZASST.PDS*.

Inside the restored data set you will find a Rexx script called \$RECEIVE, a short \$README as well as the application libraries CEXEC, ISPMLIB, ISPPLIB, ISPSLIB and SKEL.

3. EXEC the \$RECEIVE script to set up the application libraries:

```
TSO EXEC 'prefix.SSZASST.PDS($RECEIVE)'
```



Note

Alternatively, you can simply type EXEC next to \$RECEIVE in a member list.

This Rexx will prompt for the HLQ under which the application libraries are to be set up, as well as optional VOLSER, if needed.

4. Press **Enter** repeatedly to page through the command output.

The following libraries will be created, assuming default names:

```
prefix.SSZASST.CEXEC
prefix.SSZASST.ISPMLIB
prefix.SSZASST.ISPPLIB
prefix.SSZASST.ISPSLIB
prefix.SSZASST.SKEL
```

The script should terminate with return code zero. Two most common issues at this point would be related to dataset allocation space or missing Rexx runtime.

In the latter case, the Tectia SSH Assistant application requires the Rexx runtime or Rexx alternate libraries to execute. The Rexx Alternate Library SEAGALT (for example, FAN140.SEAGALT or IBM.REXX.SEAGALT, etc.), which is shipped as part of z/OS since version 1.9, may be used to satisfy this requirement. Make sure that SEAGALT is available in the linklist or in a STEPLIB allocated to your TSO session.

The following message indicates that a suitable Rexx runtime was not found:

```
IRX0159E The run time processor EAGRTPRC is not available
```

To solve the issue, add a line to the appropriate PARMLIB(PROGxx) member such as:

```
LNKLST ADD NAME(LNKLST00) DSN(FAN140.SEAGALT) VOLUME(&SYSR1)
```

5. Set up the Tectia SSH Assistant application to be invoked. The simplest way to do this is to EXEC *prefix.SSZASST.CEXEC(SSZ)* directly, which will use LIBDEF to allocate the panel and skeleton libraries, assuming they share the same qualifiers as the Rexx library:

```
TSO EXEC 'prefix.SSZASST.CEXEC(SSZ)'
```



Note

Alternatively, you can concatenate the libraries to the appropriate DDs in your TSO logon procedure, or copy their contents to allocated user ISPF data sets.

You should now be in the Tectia SSH Assistant main menu.

```
SSZ SMITH          Secure Shell Assistant      2023/11/19 12:36
Option ===>

0 SETM      Installation settings and defaults submenu
1 GENJ      Generate installation jobs
2 INST     Perform the step-by-step installation
3 CONF     Manage configuration files
4 TASK     Start/stop/modify started tasks
5 UTIL     Utility jobs to manage the installation
6 MANP     Browse the manual pages directory
7 STAT     Show status information about the installation
```



Note

There is online help available for each panel and most fields.

The mode of operation of Tectia SSH Assistant follows a probably familiar approach of collecting settings, generating JCL jobs and configuration files, and then executing those jobs. Since there are many steps which must be run by a privileged user, such as granting RACF permissions, defining file systems, etc., the install jobs may be run by other users than the one who generated them.

2.3.2 Installation Settings and Defaults

The settings for the installation is done via the Tectia SSH Assistant's **Installation settings and defaults (0 SETM)** panel.

```
SSZ SMITH          Secure Shell Assistant      2023/11/19 12:36
Option ==> 0
```

0 SETM	Installation settings and defaults submenu
--------	--

The settings for installation input ([0.2 SETI](#)) and output ([0.3 SETO](#)) are described in more detail in the following, and you can also consult the online help.

Start from the beginning with **0.0 SETG**:

SSZ SMITH	Settings submenu	2023/11/19 12:37
Option ===> 0		
0 SETG	Define general settings	
1 SETS	Define sources for installation	
2 SETI	Define settings for installation input	
3 SETO	Define settings for installation output	
4 SETL	Load settings profile from logged definition	



Note

At this stage you may return to adjust the settings and regenerate the jobs as often as necessary.

0.0 SETG - Define general settings

A log file of settings options is built based on the selections and input provided. This log file is useful as a record, but it also allows a different user to import your settings and continue the installation, with possibly higher privileges.

For this reason, on a new installation, the name of the log file must be given before proceeding, so you will be prompted for this via the **0.2 SETI** panel.

SSZ SMITH	Define Settings and Defaults	2023/11/19 12:37
Command ===>		
Enter the input settings to use for customizing SSH install jobs.		
HLQ	====> SSZ	High-level qualifier
Version	====> 6.7.6.1	SSZ Version number
Installer	====> U0	UID 0 user who will perform installation
Installer tailored batch jobs output dataset details:		
DSName	====> SSZ.INSTALL.CNTL	
LogFile	====> SSZ.INSTALL.LOG	
Volser	====>	Unit ===> Storclas ===>
Default jobcards for install jobs:		
//	JOB ,CLASS=A,MSGCLASS=X,MSGLEVEL=(1,1),	
//	NOTIFY=&SYSUID	

Just set the logfile details and exit this panel.

The installer will now be able to save settings. You can return to this panel later to complete other details if necessary. On exit, you will be in the originally selected option, **0.0 SETG**.

```
SSZ SMITH           Define Settings and Defaults      2023/11/19 12:37
Command ===>

Enter general settings here.

TSO Console ===> N Use TSO console instead of SDSF for Task operations.
Init.d Scripts ===> N Provide old-style init.d wrappers for daemons.
```

The defaults are acceptable for most cases. Refer to the online help here if you require further information.

0.1 SETS - Define sources for installation

Next, choose **0.1 SETS** to specify the location of the product tar file and the licence files supplied by SSH.com. Those files should have been copied to a suitable place in the z/OS USS filesystem or the MVS dataset realm. If not, refer to [Section 2.1.6](#).

As supplied, the product file name includes the version-release number in a form that can conveniently be parsed by the installer, helping to avoid problems. So it is recommended to save it with the same name under an appropriate path in the filesystem such as, for example: `/tmp/ssh-tectia-server-zos-6.7.6.228-ibmzos.tar.Z`



Note

If the product tar file and the license files are copied to a dataset, the corresponding name should match the MVS-style mask: `**.V676228.TAR**`.

```
SSZ SMITH           Define Sources for Installation      2023/11/19 12:37
Command ===>
```

Enter the archive containing the executables and configuration files for the Tectia for z/OS installation:

```
Tarball ===> /u/work/ssh-tectia-server-zos-6.7.6.228-ibmzos.tar.Z >
```



Note

If archive resides in the USS file system, you need to specify the path in the form of: `/tmp/ssh-tectia-server-zos-6.7.6.228-ibmzos.tar.Z`



Note

If the archive is copied to a dataset (PSU, lrecl 0, cylinders 130), and specified using a quoted or unquoted dataset name, you need to specify it in the form of: `ssz.V676228.TARZ`

Next, enter the tar file containing licence files for the ssh server and clients. Specify the USS path name where it may be found. It will be extracted either from a .tar file or a gzipped .tar.gz file.

```
Licences    ===> /tmp/licences-6.7.tar >
```

The product version-release number will be set to 6.7.6.228 from this input, so the name of the licences tarball will be set with a reasonable default, but may be changed as needed. This version-release number will also be preset in the version number field of the next screen.

0.2 SETI - Define settings for installation input

Back in the settings submenu, choose **0.2 SETI**. This was the screen we saw when a first install required information to define a log file (**0.0 SETG**). Now we can complete the other fields where the default needs to be changed. Important is to set the correct name of the UID 0 user who will actually run the install jobs.

```
SSZ SMITH           Define Settings and Defaults      2023/11/19 12:38
Command ===>

Enter the input settings to use for customizing SSH install jobs.

HLQ      ===> SSZ           High-level qualifier

Version  ===> 6.7.6.228    SSZ Version number
Installer ===> JS          UID 0 user who will perform installation

Installer tailored batch jobs output dataset details:
DSName   ===> 'SMITH.SSZ.INSTALL.CNTL'
LogFile   ===> 'SMITH.SSZ.INSTALL.LOG'
Volser    ===>           Unit ===>           Storclas ===>

Default jobcards for install jobs:
//        JOB ,,CLASS=A,MSGCLASS=X,MSGLEVEL=(1,1),
//                  NOTIFY=&SYSUID
```



Note

You can refer to the help panel and the field-level help by positioning the cursor in a field and pressing the help PF key.

The following table lists the settings in the **Define settings for installation input (0.2 SETI)** panel used for customizing the install jobs.

Table 2.1. Define settings for installation input (0.2 SETI)

Setting	Description	Example value
HLQ	Data set high-level qualifier for this install. The high-level qualifier will be used to name data sets, such as PARMLIB and SAMPLIB, created during installation.	SSZ
Version	Version number of the SSH package to install. The version number will usually be part of the name of the original product install tar archive, which will contain a directory named ./ssh-tectia-server-zos-6.7.6.XXX. <i>Make sure you enter the correct version number!</i> It must correspond with the untarred directory name.	6.7.6.228
Installer	ID of the UID=0 user who will run the installation. A user with the needed authority is required to run jobs and perform other actions to complete the installation. Jobs will be generated to grant this user certain rights.	JS
Installer tailored batch jobs output data set details		
DSName	Name of the tailored batch jobs output data set. If the DSN exists, it must be a partitioned data set. If it does not exist, it will be created.	'SMITH.SSZ.INSTALL.CNTL'
LogFile	Name of the installation log data set. The DSN will not be qualified and will be created as a sequential file, deleting it if it already exists. The optional volser and unit will be used if supplied.	'SMITH.SSZ.INSTALL.LOG'
Volser (optional)	Volume for tailored jobs output data set. A volser may optionally be supplied to be used in creating the output data set for installation batch jobs.	
Unit (optional)	Unit for tailored jobs output data set. A unit may optionally be supplied to be used in creating the output data set for installation batch jobs.	
Storclas (optional)	Storage class for tailored jobs output data set. A storage class may optionally be supplied to be used in creating the output data set for installation batch jobs.	
Default jobcards for install jobs		
	Your local Job Control Language (JCL) Job Cards. You can specify as many as four default job cards which will be used in generating configuration and sample jobs. The jobname may be left blank; it will be generated based on the installer user ID and the job name.	

0.3 SETO - Define settings for installation output

Finally, select the panel 3 SETO for defining various installation settings which specify the names of the output datasets, libraries, users and procedures to be generated.

The ssh server will run as a started task from a procedure library known to JES, which may be customized here in the proclib field. Also supply the parmlib to be used to provide certain parameters to the system if necessary. The name of the ssh server started task and the name of the user under which the started task will be run may be changed here or the default values accepted.

Similarly, the names of the started tasks and userids for the Certificate server and the Socks Proxy may be customized here. Refer to the help screens.

```
SSZ SMITH           Define Settings and Defaults      2023/11/19 12:38
Command ===>

Enter the output settings to use for customizing SSH install jobs.

Installation target details:
ZFS DSName ===> 'SSZ.V676228.ZFS'
Volser      ===>           Unit ===>           Storclas ===>
Mountpoint ===> /u/vendor/ssz-676228                                >

System libraries to receive procs and parms:
Proclib    ===> 'USER.Z25B.PROCLIB'
Parmlib    ===> 'USER.Z25b.PARMLIB'

Started task details:
SSHD user  ===> SSHD2           UID 0 user to run SSH server
SSHD proc   ===> SSHD2           SSH server procedure name
CERT proc   ===> SSHCERTD        Certificate server procedure name
SOXP user   ===> SSHSP          User to run Socks Proxy
SOXP proc   ===> SSHSP          Socks Proxy server procedure name
SOXP home   ===> /u/sshsp        >
SFTP APF    ===> y   SFTP server and clients will use filetype=ADRDSU
```



Note

By default, the product is installed into a separate filesystem in a ZFS dataset which gets mounted on the supplied mountpoint name. This is recommended for its isolation and ease of management. However, the product can also be installed under a chosen directory in an existing filesystem: just supply the word NONE as the ZFS DSN for this case.

The following table lists the settings in the **Define settings for installation output (0.3 SETO)** panel used for customizing the install jobs.

Table 2.2. Define settings for installation output (0.2 SETO)

Setting	Description	Example value
Target zFS details:		
ZFS DSName	Name of the data set for the installation zFS. The DSN will be used to tailor jobs to allocate and define the zFS, as well as mount commands and BPXPRM parameters.	'SSZ.V6762XXX.ZFS'
Volser	Volume for the installation zFS. A volser may optionally be supplied to be used to tailor jobs to allocate and define the zFS. If you do not define <code>Volser</code> , you must define <code>Storclas</code> (below).	
Unit	Unit for the installation zFS. A unit may optionally be supplied to be used to tailor jobs to allocate and define the zFS. If you do not define <code>Unit</code> , you must define <code>Storclas</code> (below).	
Storclas	Storage class for the installation zFS. A storage class may optionally be supplied to be used to tailor jobs to allocate and define the zFS. If you defined <code>Volser</code> and <code>Unit</code> , leave this empty.	
Mountpoint	Mountpoint name for the installation zFS. The mountpoint name specifies the point in the Unix file system where the installation zFS will be mounted. It is used in generating jobs, commands and parameters.	/u/vendor/ssz-6762XXX
System libraries to receive procs and parms:		
Proclib	Name of the system library to receive procs. The proclib name is used in generating jobs to install cataloged procedures for started tasks for the SSH server and other server tasks.	USER.Z25B.PROCLIB
Parmlib	Name of the system library to receive parms. The parmlib name is used in generating procedures for started tasks such as the SSH server.	USER.Z25B.PARMLIB
Started task details:		
SSHD user	ID of the UID=0 user under which to run the server. A user with the needed authority is required to run the SSH server. The value supplied here will be used to create jobs to set up this user and grant the required rights.	SSHD2
SSHD proc	SSH server cataloged procedure name. The name of the started task procedure to run the SSH server supplied here will be used in tailoring and loading the procedure to the proclib.	SSHD2
CERT proc	Certificate Validator cataloged procedure name. The name of the started task procedure to run the Certificate server supplied here will be used in tailoring and loading the procedure to the proclib.	SSHCERTD
SOXP user	ID of the user under which to run the SOCKS Proxy. A user with the needed authority is required to run the SOCKS Proxy. The value supplied here will be used to generate jobs to set up this user and grant the required rights.	SSHSP

Setting	Description	Example value
SOXP proc	SOCKS Proxy cataloged procedure name. The name of the started task procedure to run the SOCKS server supplied here will be used in tailoring and loading the procedure to the proclib.	SSHSP
SOXP home	SOCKS Proxy user's home folder location.	/u/sshsp

2.3.3 Generating Product Installation Jobs

Tailoring of the required installation jobs is performed from the **Generate installation jobs (1 GENJ)** submenu.

```
SSZ SMITH           Secure Shell Assistant           2023/11/19 12:38
Option ==> 1
```

Note

The exact jobs required depend on the type of installation and a knowledgeable user may skip those not required. For instance, in the case of updating an existing working installation, it is enough to successfully run jobs 7 to 13 (and job 14 when new licenses are to be installed) - see [the section called “Completing the Product Upgrade”](#).

```
=====
SSZ SMITH           Generate Installation Jobs           2023/11/19 12:40
Option ==> 1

1 INSTUSR          Grant permissions to user doing install
2 CPGMCTL          Ensure C library program-controlled
3 ADDSSHDU         Setup SSH Server user
4 ADDSOXPU         Setup Socks Proxy Server user
5 CSFSERV          ICSF permissions
6 SERVAUTH         Port 22 control
7 SAVE              (Save previous installation key data)
8 ZFS               Define installation ZFS / directory
9 LOAD              Load installation ZFS / directory
10 RESTORE          (Restore previous installation key data)
11 SYMLINK          Create /opt/tectia symlink
12 SSZLIBS          Sample JCL and PARM libraries
13 PROCLIB          Set up started task procs
14 LICENCE          Install licences from supplied tarball
15 KEYGEN           Generate server host keys

99 GENALL          Generate all jobs ( Edit: N )

=====
```

This step merely generates the jobs; nothing is run at this stage. You should inspect the generated jobs carefully, as well as verify them with `TYPRUN=SCAN` on the generated job cards. The JCLs must be run by the authorized installing user to have effect (see [Section 2.3.4](#)).

Selecting any of the options in this panel will result in the presentation of a file-tailored JCL job to perform the task in question. You can also use the **99 GENALL** option to generate all the jobs at once.

The options are listed in [Table 2.3](#), followed by a more detailed description of each of them.

Table 2.3. Generate Installation Jobs submenu (1 GENJ)

Option	Description	The generated job must be run
1.1 INSTUSER	Grant permissions to user doing install	On first install
1.2 CPGMCTL	Ensure C library program-controlled	On first install
1.3 ADDSSHDU	Set up SSH Server user	On first install
1.4 ADDSOXPU	Set up SOCKS Proxy Server user	If the SOCKS Proxy is to be run as a started task
1.5 CSFSERV	ICSF permissions	If access to ICSF is to be restricted
1.6 SERVAUTH	Port 22 control	If access to the SSH port is to be controlled
1.7 SAVE	Save previous installation key data	On each upgrade (to carry customizations forward)
1.8 ZFS	Define installation ZFS	On each install/upgrade
1.9 LOAD	Load installation ZFS	On each install/upgrade
1.10 RESTORE	Restore previous installation key data	If the complementary SAVE job has been run
1.11 SYMLINK	Create <code>/opt/tectia</code> symlink	On each install/upgrade
1.12 SSZLIBS	Sample JCL and PARM libraries	On each install/upgrade
1.13 PROCLIB	Set up started task procedures	On each install/upgrade
1.14 LICENCE	Install licenses from supplied tarball	On first install and whenever licenses change
1.15 KEYGEN	Generate server host keys	On first install
1.99 GENALL	Generate all jobs	(On first install)

1.1 INSTUSER - Grant Permissions to User Doing Install

The user who is going to install, configure and run Tectia Server for IBM z/OS requires authority to make changes normally restricted to special users. You may use any user with RACF SPECIAL and UID 0 to perform this role.

In addition, the installing user needs some authorities which may well not be granted already. This step generates a job which will allow the installing user to permit program-control rights and to issue console commands. The job must be run at least on the first install of the product.

1.2 CPGMCTL - Ensure C Library is Program-controlled

It is necessary for the C Runtime Library to be marked program-controlled in order for Tectia Server for IBM z/OS to perform functions such as allowing authenticated users to log on.

This step generates a job which will allow the installing user to alter the C Runtime Library program-control status. The job must be run at least on the first install of the product.

1.3 ADDSSHDU - Set Up SSH Server User

Tectia Server for IBM z/OS should be run by a user dedicated for that purpose and granted the appropriate rights.

This step generates a job which will allow the installing user to define the SSH server started-task user, granting it permissions to run as a daemon and to create SMF records, as well as ownership of the SSH server and Certificate server started tasks. The job must be run at least on the first install of the product.

1.4 ADDSOXPU - Set Up SOCKS Proxy Server User

The SOCKS Proxy server should be run by a user dedicated for that purpose and granted the appropriate rights.

This step generates a job which will allow the installing user to define the SOCKS Proxy server started-task user. The started-task user will own the SOCKS Proxy server started task and have the right to change its job name. The home directory required by the started-task user will also be created.

If the SOCKS Proxy is to be run as a started task, this job must be run at least on the first install of the product.

1.5 CSFSERV - ICSF Permissions

To take advantage of cryptographic hardware and to manage its use, we recommend you to define access permissions.

This step generates a job which will grant permissions to all users to access certain features of ICSF cryptographic support needed for efficient SSH operations. If access to ICSF is to be restricted, this job should be run at least on the first install of the product.

1.6 SERVAUTH - Port 22 Control

Access to the SSH port may be controlled via the servauth RACF class, limiting binding this port to specific UIDs.

This step generates a job which will deny general access to the SSH port and allow only the defined SSH server user and the OpenSSH SSHDAEM user to bind the port. This job should be run if you want to control access to the SSH port (a recommended but not necessary practice).

1.7 **SAVE** - Save Previous Installation Key Data

When upgrading or re-installing, it is convenient to reuse some data from the previous installation.

This step generates a job which will create a tar archive of the contents of the customization and ephemeral data directories `etc` and `var` for later restoration after the install. This job should be run when upgrading an existing installation and you want to carry customizations forward.

1.8 **ZFS** - Define Installation ZFS

The Tectia Server for IBM z/OS installation is done into a separate zFS data set for control and manageability.

This step generates a job which will allocate a new zFS data set, format and mount it onto the defined mount point, using names and attributes given in the settings panel. This job must be run on each install or upgrade of the product.

1.9 **LOAD** - Load Installation ZFS

The Tectia Server for IBM z/OS product is supplied as a tar file which is loaded into a previously defined and mounted zFS.

This step generates a job which will load the product into the file system and ensure that the appropriate ownership, permissions and authorizations are set. This job must be run on each install or upgrade of the product.

1.10 **RESTORE** - Restore Previous Installation Key Data

When upgrading or re-installing, it is convenient to reuse some data from the previous installation.

This step generates a job which will restore the contents of the customization and ephemeral data directories `etc` and `var` saved prior to the install. This job should be run if its complementary **SAVE** job had been run.

1.11 **SYMLINK** - Create `/opt/tectia` Symlink

The Tectia Server for IBM z/OS product must be run from the path `/opt/tectia`, which is a symlink to the installation location.

This step generates a job which will create a symlink to the product installation directory. It is necessary for `/opt` to be mounted read-write when this job is run. This job must be run on each installation or upgrade.

1.12 **SSZLIBS** - Sample JCL and PARM Libraries

Sample jobs for a variety of SSH tasks as well as the recommended environment settings are provided.

This step generates a job which will create PDS libraries for the sample jobs and parameters, loading them with appropriately tailored content. This job should be run on each installation or upgrade.

1.13 PROCLIB - Set Up Started Task Procedures

Customized procedures for the Tectia Server for IBM z/OS started tasks are installed to the specified system proclib.

This step generates a job which will install tailored JCL procedures for the SSH server, Certificate server and SOCKS Proxy to the proclib requested in settings, as well as installing a BPXPRMSZ member in the requested parmlib to facilitate mounting the SSZ zFS at OMVS start time. This job must be run on each installation or upgrade.

1.14 LICENCE - Install Licenses From Supplied Tarball

The Tectia Server and client tools for z/OS licenses are supplied in a separate tar file for installation.

This step generates a job which will extract the product licenses from the tar file supplied separately by SSH Licensing or downloaded from the Customer Download Center, converting them and installing them in the required location. If the tar file is gzipped (.gz), the *gzip* utility must be available in the path. This job must be run on first install and whenever licenses change. On other occasions, it is easier to use the SAVE/RESTORE jobs to carry the licenses forward.

1.15 KEYGEN - Generate Server Host Keys

An SSH server public/private host key pair is required for server operations.

This step generates a job which will create a set of host keys (2048-bit RSA by default) for the SSH server and install them in the required location with correct permissions. This job must be run on first install. For a re-installation or upgrade, it may be desirable to reuse existing host keys via the SAVE/RESTORE jobs and skip this step.

2.3.4 Running the Product Installation Jobs

Once the product installation jobs have been generated as instructed in [Section 2.3.3](#), the installing user must run them.

As the installing user, do the following:

1. EXEC the Tectia SSH Assistant application:

```
TSO EXEC 'prefix.SSZASST.CEXEC(SSZ)'
```

2. In Tectia SSH Assistant, go to **0 SETM** → **4 SETL** and define the installation log data set from which to extract the installation settings:

```
LogFile ==> '<prefix>.SSZ.INSTALL.LOG'
```

3. In **0.2 SETI** and **0.3 SETO**, check that the installation input and output settings are correct.

4. The **Perform the step-by-step installation (2 INST)** submenu provides a member list (**2.1 JOBS**) of generated jobs in the order they should be run. Submit and check the installation jobs one by one in the order they are listed in. You should see a list of jobs that correspond to the actions in [Section 2.3.3](#). Each job run updates the installation log with its results. After successful completion, the SSH server and clients are installed, with all necessary permissions set up.



Note

It is important to run the installation jobs carefully, in particular ensuring they have executed correctly. The generated jobs PDS and the install log are useful in diagnosing and reporting problems.

```
=====
Menu  Functions  Utilities  Help

MEMBER LIST  SMITH.SSZ.INSTALL.CNTL                               Row 0000001 of 0000015
Command ====>                                                 Scroll ==> PAGE
      Name    Prompt     Size   Created        Changed      ID
..... X01IUSR          101  2023/11/19  2023/11/19 12:41:12  SMITH
..... X02CPCT           23   2023/11/19  2023/11/19 12:41:13  SMITH
..... X03SSHU           64   2023/11/19  2023/11/19 12:41:14  SMITH
..... X04SXPU           68   2023/11/19  2023/11/19 12:41:15  SMITH
..... X05CSFS           86   2023/11/19  2023/11/19 12:41:17  SMITH
..... X06SRVA           33   2023/11/19  2023/11/19 12:41:18  SMITH
..... X07SAVE           34   2023/11/19  2023/11/19 12:41:19  SMITH
..... X08ZFSA           85   2023/11/19  2023/11/19 12:41:20  SMITH
..... X09LOAD           126  2023/11/19  2023/11/19 12:41:23  SMITH
..... X10REST           38   2023/11/19  2023/11/19 12:41:24  SMITH
..... X11OPTT           24   2023/11/19  2023/11/19 12:41:25  SMITH
..... X12LIBS           74   2023/11/19  2023/11/19 12:41:40  SMITH
..... X13PROC           34   2023/11/19  2023/11/19 12:41:44  SMITH
..... X14LICN           41   2023/11/19  2023/11/19 12:41:46  SMITH
..... X15KEYG           25   2023/11/19  2023/11/19 12:41:47  SMITH
**End**
```

=====

5. EXEC the Tectia SSH Assistant application.

To start the SSH server, go to **4 TASK → 1 TSRV** and enter **1 TSRVS**.

Or, before starting the server you may view and edit its configuration by entering **3 CONF**.

2.3.5 SSZASST Installation Status

The Tectia ISPF Assistant (SSZASST) provides a facility to investigate the status of an installation, via main menu option (**7 STAT**). It is useful for reviewing and collecting data to assist in understanding the configuration, and reporting problems

```
SSZ USERX          Secure Shell Assistant      2025/09/05 12:55
Option ===> 7

0  SETM      Installation settings and defaults submenu
1  GENJ      Generate installation jobs
2  INST      Perform the step-by-step installation
3  CONF      Manage configuration files
4  TASK      Start/stop/modify started tasks
5  UTIL      Utility jobs to manage the installation
6  MANP      Browse the manual pages directory
7  STAT      Show status information about the installation
8  CJOB      Generate client jobs for file transfer, etc.
```

Select option 7 from the SSZASST main menu to access the STAT submenu.

```
SSZ USERX          Status of Installation    2025/09/05 12:55
Option ===> 0

0  ABOUT      Installer version and build details
1  VARS       Installation variable settings
2  USER       Attributes of installer and daemon users
3  GENL       Permissions needed for general resources
4  FILE       Installed files summary
5  NET        Network status summary
6  OMVS       OMVS configuration, BPXPRM, etc.
7  PS         Active OMVS processes
```

Select options to view installation variable settings, to display attributes of the userids for installation and for running the SSH started tasks. Other general resources also requiring RACF permissions may be reviewed from here, as well as network status, OMVS configuration, and active USS processes.

SSZASST : Status : About Installer

```
SSZ USERX          Status : About the Installer  2025/09/05 12:55
Command ===>

Product Version 6.7.6.70
Build Number    70
Revision Commit 46c80e78030
```

This panel displays information about the current version of the SSH Installer application, such as the Tectia build it was released with and its version control commit. This information is useful when reporting problems.

SSZASST : Status : Installation Variables

SSZ USERX	Status : Installation Variables			2025/09/05 12:55
Command ===>				
Tarball	/u/work/ssh-tectia-server-zos-6.7.6.70-ibmzos.tar.Z			>
Licences	/tmp/licences-6.7.tar			>
HLQ	SSZ	Version	6.7.6.70	Installer UR
Jobs DSN	'USERX.SSZ.INSTALL.CNTL'			
Jobs Log	'USERX.SSZ.INSTALL.LOG'			
Jobs Volser	Unit		Storclas	
Jobcards	//	JOB , ,CLASS=A,MSGCLASS=X,MSGLEVEL=(1,1),		
	//	NOTIFY=&SYSUID		
ZFS DSN	'SSZ.V6706070.ZFS'			
ZFS Volser	Unit		Storclas	
ZFS Mount	/u/vendor/ssz-6706070			>
Proclib	'USER.Z25A.PROCLIB'			
Parmlib	'USER.Z25A.PARMLIB'			
SSHD User	SSHD2	SSHD Proc	SSHD2	CERT Proc SSHCERTD
SOXP User	SSHSP	SOXP Proc	SSHSP	
SOXP Home	/u/sshsp			>
SFTP APF	Y	TSO Cons	N	Old Inits

This panel displays the current settings of the user defined installation status variables, as specified in the settings menus.

SSZASST : Status : User Attributes

SSZ UR	Status : Key User Attributes			2025/09/05 13:01
Command ===>				
Installer UR	UID Num 0		Group SYS1	
Home	/u/ur			
Shell	/bin/sh			
RACF :				
Progtl: YES	Set APF: YES	MCSOper: YES	Console: YES	OPAuth: ALL
RadmnLU: YES	RadmnLG: YES	RadmnLO: YES	RadmnRL: YES	OmVFld: YES
Stdafld: YES				
SSHD User	SSHD2	UID Num 0	Group SYS1	
Home				
Shell	/bin/false			
RACF :				
BPXDaem: YES	BPX SMF: YES	StSSHD2: YES	StCertd: YES	
SOXP User	SSHSP	UID Num 990021	Group SYS1	
Home	/u/sshsp			
Shell	/bin/false			
RACF :				
BPX Job: YES	StSOXP : YES			

This panel displays the attributes of the installer user, the user for running the **sshd2** server started task, and the socks proxy user.

Each of these users are required to have certain OMVS properties and RACF permissions to perform their required functions. These should have been set in the installer jobs which set up these users. Use this panel to review these attributes and to check that they are correct.

Note that some of these attributes may be accessed by a properly authorized user only, and may be displayed as N/A if access is not allowed. Use the designated installer user to run this option successfully.

For help on meaning of the RACF tag fields, press PF1 on the white RACF above the tags.

SSZASST : Status : General Resources

```
SSZ UR                               Status : General Resources      2025/09/05 13:02
Command ===>

C-runtime library is in program-controlled environment :
RACF :
  Progctl: YES

ICSF permissions for ssh client users to use crypto resources :
RACF :
  CsfCKM : YES  CsfDEC : YES  CsfENC : YES  CsfHMG : YES  CsfIQQA : YES
  CsfIQF : YES  CsfKPI2: YES  CsfOWH : YES  CsfRNG : YES  CsfRNGL: YES
  CsfSAD : YES  CsfSAE : YES  Csf1DVK: YES  Csf1GAV: YES  Csf1GKP: YES
  Csf1PKS: YES  Csf1PKV: YES  Csf1SKD: YES  Csf1SKE: YES  Csf1TRC: YES
  Csf1TRD: YES

ServAuth class control over ssh port :
RACF :
  SAsshd2: YES  SAosshd: NO
```

This panel displays the attributes of general resources which are required for the functioning of the SSH product.

The ssh server, as part of its normal functionality, needs to allow users to log on and run in a process belonging to the user. Switching identities in this way requires that the execution environment be controlled via PROGRAM class in RACF. Verify that the C runtime is thus defined here.

Access permissions to some features of ICSF cryptographic support allow efficient ssh operations. These permissions can be checked on this panel.

Binding of the ssh server port can be limited to certain server userids (a recommended practice). The display will show whether the sshd2 user and the sshdaem user have been explicitly granted permission to this port.

Note that some of these attributes may be accessed by a properly authorized user only, and may be displayed as N/A if access is not allowed. Use the designated installer user to run this option successfully.

For help on meaning of the RACF tag fields, press PF1 on the white RACF above the tags

SSZASST : Status : Installed Files

SSZ USERX	Status : Installed Files Summary	2025/09/05 12:56
Command ==>		
ZFS DSN	SSZ.V6706070.ZFS	
Mounted	/u/home01b/vendor/ssz-6706070	>
Type	DIR ReadOnly NO	
OptTect	/opt/tectia	>
Type	SYM	
OptT Trg	/u/vendor/ssz-6706070/tectia	>
Tectia	/u/home01b/vendor/ssz-6706070/tectia	>
Type	SYM	
Link Trg	/u/vendor/ssz-6706070/ssh-tectia-server-zos-6.7.6.70	>
Type	DIR	
Trg sbin	/u/vendor/ssz-6706070/ssh-tectia-server-zos-6.7.6.70/sbin	>
sshd2	/u/vendor/ssz-6706070/ssh-tectia-server-zos-6.7.6.70/sbin/sshd2	>
Mode	755 Extattrs -ps-	
sftpg3	/u/vendor/ssz-6706070/ssh-tectia-server-zos-6.7.6.70/bin/sftpg3	>
Mode	755 Extattrs --s- (sftpg3a) a-s-	

This panel displays the status of the USS files, symlinks and directories in which the SSH product is installed.

The product is installed into a separate VSAM linear data set cluster, formatted ZFS and mounted on an installation specified mount-point. The product-standard symbolic link (always `/opt/tectia`), points to this mount-point. This structure enables efficient location of product components at run time, while permitting customer control of physical installation objects.

Use this screen to verify that the installation structure is correctly defined.

It shows, in order, the name of the ZFS product dataset, its mount-point and attributes, the presence of the `/opt/` symlink, and the actual product directory, including the location, mode and extended attributes of the `sshd2` binary for the ssh server and of the `sftpg3` client program.

A correct installation should show the ZFS product dataset mounted on the directory specified when configuring the installation. This may be a read-write or read-only mount depending on user customization. The `/opt/tectia` symlink should be marked SYM. The Tectia product symlink within the mount-point directory should point to the real product target directory, which in turn should contain the binary product files, including the `sshd2` binary with executable mode permissions and the program-control bit set, as well as the `sftpg3` binary, its mode and the authorized `sftpg3a` binary and its extended attributes, if selected.

Fields are coloured red where the directory structure does not follow the description above.

SSZASST : Status : Network

```
SSZ USERX           Status : Network Details      2025/09/05 12:56
Option ===> 1

Select netstat query here.

1 Conn  Connections: summary of active listeners and connections
2 All   All: detailed information about connections and sockets
3 Sock  Sockets: information about clients using sockets

Options.
SERVER  ===> N    APPLDATA  ===> N

Enter filters here.
PORT    ===>
APPLD   ===>
CLIENT  ===>
```

This panel may be used to issue TSO netstat commands to inspect the network status of the ssh server and clients.

Options to issue "preformatted" commands examining active connections and listeners in summary form, and in detailed form, as well as socket users, are provided. Some basic options and filters may be selected to modify the command generated. The results are displayed in a browse panel.

Option 1 Conn runs the generated command:

```
NETSTAT CONN [ SERVER ] [ APPLDATA ] [ (PORT num) ]
              [ (APPLD mask) ]
              [ (CLIENT mask) ]
e.g. NETSTAT CONN (APPLD SZS*)
```

Option 2 All runs the generated command:

```
NETSTAT SOCK [ (CLIENT mask) ]
e.g. NETSTAT SOCK (CLIENT SSH*)
```

The PORT, APPLD and CLIENT input fields may be used to filter the output with the given mask where applicable to the selected netstat command.

```
Menu Utilities Compilers Help

BROWSE    USERX.SSZ.V67670.NETSTAT.OUT      Line 0000000000 Col 001 080
Command ===>                               Scroll ===> PAGE
***** Top of Data *****
EZZ2350I MVS TCP/IP NETSTAT CS V2R5      TCPIP Name: TCPIP      12:56:30
EZZ2585I User Id Conn      Local Socket      Foreign Socket      State
EZZ2586I ----- ----      -----      -----
EZZ2587I BPXOINIT 00000014 0.0.0..10007      0.0.0.0..0      Listen
EZZ2587I FTPD1      0000000A 0.0.0..21      0.0.0.0..0      Listen
```

EZZ2587I	USERX4	0000001F	192.168.10.90..1025	192.168.10.100..22	Establs
EZZ2587I	USERX5	00000020	0.0.0.0..2222	0.0.0.0..0	Listen
EZZ2587I	PORTMAP	00000012	0.0.0.0..111	0.0.0.0..0	Listen
EZZ2587I	SSHD3	00000015	192.168.10.90..22	192.168.10.100..39246	Establs
EZZ2587I	SSHD3	00000010	0.0.0.0..22	0.0.0.0..0	Listen
EZZ2587I	TN3270	0000000F	0.0.0.0..23	0.0.0.0..0	Listen
EZZ2587I	TN3270	0000000E	0.0.0.0..2023	0.0.0.0..0	Listen
EZZ2587I	PORTMAP	00000011	0.0.0.0..111	*.*	UDP
EZZ2587I	SYSLOGD	0000000B	0.0.0.0..514	*.*	UDP
***** Bottom of Data *****					

Above is an example **NETSTAT CONNECTION** display, showing a summary of active listeners and connections

Menu Utilities Compilers Help					
BROWSE	USERX.SSZ.V67670.NETSTAT.OUT				Line 0000000000 Col 001 080
Command ===>					Scroll ==> PAGE
***** Top of Data *****					
EZZ2350I	MVS TCP/IP NETSTAT CS V2R5	TCPIP	Name: TCPIP	12:56:43	
EZZ2550I	Client Name: BPXOINIT	Client	Id: 00000014		
EZZ2551I	Local Socket: 0.0.0.0..10007	Foreign	Socket: 0.0.0.0..0		
EZZ2577I	BytesIn: 0000000000	BytesOut:	0000000000		
EZZ2574I	SegmentsIn: 0000000000	SegmentsOut:	0000000000		
EZZ2536I	StartDate: 09/02/2025	StartTime:	21:57:14		
EZZ2552I	Last Touched: 21:57:14	State:	Listen		
EZZ2553I	RcvNxt: 0000000000	SndNxt:	0000000000		
EZZ2554I	ClientRcvNxt: 0000000000	ClientSndNxt:	0000000000		
EZZ2555I	InitRcvSeqNum: 0000000000	InitSndSeqNum:	0000000000		
EZZ2556I	CongestionWindow: 0000000000	SlowStartThreshold:	0000000000		
EZZ2557I	IncomingWindowNum: 0000000000	OutgoingWindowNum:	0000000000		
EZZ2558I	SndWl1: 0000000000	SndWl2:	0000000000		
EZZ2559I	SndWnd: 0000000000	MaxSndWnd:	0000000000		
EZZ2560I	SndUna: 0000000000	rtt_seq:	0000000000		
EZZ2561I	MaximumSegmentSize: 0000000536	DSField:	00		
EZZ2563I	Round-trip information:				
EZZ2564I	Smooth trip time: 0.000	SmoothTripVariance:	1500.000		
EZZ2565I	ReXmt: 0000000000	ReXmtCount:	0000000000		
EZZ2572I	DupACKs: 0000000000	RcvWnd:	0000131072		
EZZ2566I	SockOpt: 00	TcpTimer:	00		
EZZ2567I	TcpSig: 00	TcpSel:	00		
EZZ2568I	TcpDet: C0	TcpPol:	00		
EZZ2593I	TcpPrf: 00	TcpPrf2:	00		
EZZ2593I	TcpPrf3: 00				
EZZ2537I	QOSPolicy: No				
EZZ2545I	TTLSPolicy: No				
EZZ2542I	RoutingPolicy: No				
EZZ2570I	ReceiveBufferSize: 0000065536	SendBufferSize:	0000065536		
EZZ2581I	ConnectionsIn: 0000000000	ConnectionsDropped:	0000000000		
EZZ2594I	MaximumBacklog: 0000000004	ConnectionFlood:	No		
EZZ2582I	CurrentBacklog: 0000000000				
EZZ2608I	ServerBacklog: 0000000000	FRCABacklog:	0000000000		

```

EZZ2562I CurrentConnections: 0000000000      SEF:          100
EZZ2576I Quiesced:                  No
EZZ2571I ----
EZZ2550I Client Name: FTPD1          Client Id: 0000000A
EZZ2551I Local Socket: 0.0.0.0..21    Foreign Socket: 0.0.0.0..0

```

Above is a partial display of the results of a **NETSTAT ALL** command, showing detailed information about connections and sockets.

```

Menu Utilities Compilers Help

BROWSE      USERX.SSZ.V67670.NETSTAT.OUT          Line 0000000000 Col 001 080
Command ===>                                         Scroll ===> PAGE
***** Top of Data *****
EZZ2350I MVS TCP/IP NETSTAT CS V2R5      TCPIP Name: TCPIP          12:57:28
EZZ2550I Client Name: SSHD3          Client Id: 00000010
EZZ2551I Local Socket: 0.0.0.0..22    Foreign Socket: 0.0.0.0..0
EZZ2577I BytesIn:                  0000000000      BytesOut:        0000000000
EZZ2574I SegmentsIn:                0000000000      SegmentsOut:     0000000000
EZZ2536I StartDate:                09/02/2025     StartTime:       21:57:01
EZZ2552I Last Touched:              12:12:41       State:          Listen
EZZ2553I RcvNxt:                  0000000000      SndNxt:         0000000000
EZZ2554I ClientRcvNxt:             0000000000      ClientSndNxt:   0000000000
EZZ2555I InitRcvSeqNum:            0000000000      InitSndSeqNum:  0000000000
EZZ2556I CongestionWindow:         0000000000      SlowStartThreshold: 0000000000
EZZ2557I IncomingWindowNum:        0000000000      OutgoingWindowNum: 0000000000
EZZ2558I SndW11:                  0000000000      SndW12:         0000000000
EZZ2559I SndWnd:                  0000000000      MaxSndWnd:      0000000000
EZZ2560I SndUna:                  0000000000      rtt_seq:        0000000000
EZZ2561I MaximumSegmentSize:       0000000536     DSField:        00
EZZ2563I Round-trip information:
EZZ2564I     Smooth trip time: 0.000      SmoothTripVariance: 1500.000
EZZ2565I     ReXmt:                  0000000000      ReXmtCount:     0000000000
EZZ2572I     DupACKs:                0000000000      RcvWnd:         0000131072
EZZ2566I     SockOpt:                80          TcpTimer:       00
EZZ2567I     TcpSig:                 00          TcpSel:         20
EZZ2568I     TcpDet:                 C0          TcpPol:         00
EZZ2593I     TcpPrf:                 00          TcpPrf2:        00
EZZ2593I     TcpPrf3:                00
EZZ2537I     QOSPolicy:              No
EZZ2545I     TTLSPolicy:             No
EZZ2542I     RoutingPolicy:          No
EZZ2570I     ReceiveBufferSize:      0000065536     SendBufferSize: 0000065536
EZZ2581I     ConnectionsIn:          0000000003     ConnectionsDropped: 0000000000
EZZ2594I     MaximumBacklog:         0000000128     ConnectionFlood: No
EZZ2582I     CurrentBacklog:         0000000000
EZZ2608I     ServerBacklog:          0000000000      FRCABacklog:    0000000000
EZZ2562I     CurrentConnections:    0000000001     SEF:          100
EZZ2576I     Quiesced:                No
EZZ2571I ----

```

Above is a partial display of the output of a **NETSTAT ALL** command filtered on port 22, showing detailed information about connections and sockets relevant to that port.

```

Menu Utilities Compilers Help

BROWSE    USERX.SSZ.V67670.NETSTAT.OUT          Line 0000000000 Col 001 080
Command ===>                                         Scroll ===> PAGE
***** Top of Data *****
EZZ2350I MVS TCP/IP NETSTAT CS V2R5      TCPIP Name: TCPIP          12:56:53
EZZ2708I Sockets interface status:
EZZ2709I Type    Bound to          Connected to          State   Conn
EZZ2710I ===      =====          =====          =====   ====
EZZ2711I Name: BPXOINIT Subtask: 008DFCD8
EZZ2712I Stream 0.0.0.0..10007      0.0.0.0...
EZZ2711I Name: FTPD1   Subtask: 008D9CD0
EZZ2712I Stream 0.0.0.0..21       0.0.0.0...
EZZ2711I Name: USERX4   Subtask: 008FB2F8
EZZ2712I Stream 192.168.10.90..1025 192.168.10.100..22   Establish 0000001F
EZZ2711I Name: USERX5   Subtask: 008FB2F8
EZZ2712I Stream 0.0.0.0..2222      0.0.0.0...
EZZ2711I Name: PORTMAP  Subtask: 008F9058
EZZ2712I Dgram  0.0.0.0..111      *...*          UDP     00000011
EZZ2712I Stream 0.0.0.0..111      0.0.0.0...
EZZ2711I Name: SSHD3   Subtask: 008FB2F8
EZZ2712I Stream 0.0.0.0..22       0.0.0.0...
EZZ2712I Stream 192.168.10.90..22 192.168.10.100..39246 Establish 00000015
EZZ2711I Name: SYSLOGD  Subtask: 008FB2F8
EZZ2712I Dgram  0.0.0.0..514      *...*          UDP     0000000B
EZZ2711I Name: TN3270  Subtask: 008D31C8
EZZ2712I Stream 0.0.0.0..23       0.0.0.0...
EZZ2711I Name: TN3270  Subtask: 008D33E8
EZZ2712I Stream 0.0.0.0..2023      0.0.0.0...

```

Above is a display of the output of the **NETSTAT SOCK** command, showing information about clients using sockets. Filters may be applied to this and other commands to reduce the amount of output.

SSZASST : Status : OMVS

```

SSZ USERX          Status : OMVS Configuration          2025/09/05 12:57
Option ===> 1

The OMVS configuration options are relevant only for an installation using the
recommended separate product ZFS approach.

Select OMVS request here.

1 Parm Show which BPXPRM members are currently in use
2 SZ    Show BPXPRMSZ member giving mount command for Tectia ZFS

```

This panel may be used to show the OMVS automount set-up for the Tectia installation ZFS filesystem

The OMVS parmlib BPXPRMSZ member is provided to allow the automatic mounting of the Tectia product ZFS. Properly configured, it ensures that the filesystem is mounted on IPL. Use the options here to check the OMVS configuration for inclusion of the BPXPRMSZ member, and to inspect that member

```
Menu Utilities Compilers Help

BROWSE      USERX.SSZ.CONSOLE.TEMP          Line 0000000000 Col 001 080
Command ===>                               Scroll ===> PAGE
***** Top of Data *****
ISF031I CONSOLE USERX ACTIVATED
-D OMVS
BPXO042I 12.57.45 DISPLAY OMVS 955
OMVS      000F ACTIVE          OMVS=(00,01,IZ,RZ,HO,SZ)
***** Bottom of Data *****
```

Above is the output of the OMVS **Parm** selection, showing which BPXPRM members are currently in use.

```
Menu Utilities Compilers Help

BROWSE      USER.Z25A.PARMLIB(BPXPRMSZ) - 01.00      Line 0000000000 Col 001 080
Command ===>                               Scroll ===> PAGE
***** Top of Data *****
/* Mount SSZ ZFS at OMVS startup */
/* Add OMVS=(...,SZ) to appropriate parmlib IEASYSxx member */

MOUNT FILESYSTEM('SSZ.V6706070.ZFS')
  TYPE(ZFS)
  MODE(RDWR) SETUID NOAUTOMOVE
  MOUNTPOINT('/u/vendor/sss-6706070')
***** Bottom of Data *****
```

Above is the output of the OMVS **SZ** selection, showing the BPXPRMSZ member which supplied the mount command for the Tectia installation ZFS.

SSZASST : Status : Process Display

```
Menu Utilities Compilers Help

BROWSE      UR.SSZ.V67670.PROCESS.OUT          Line 0000000000 Col 001 080
Command ===>                               Scroll ===> CSR
***** Top of Data *****
      UID      PID      PPID     STIME   TTY      TIME CMD
OMVSKERN      1          0 25-09-02 ?      00:22  BPXPINPR
OMVSKERN    65538        1 25-09-02 ?      00:04  EZBREINI
OMVSKERN    65539        1 25-09-02 ?      00:01  CEAWCOMM
OMVSKERN    65540        1 25-09-02 ?      00:04  EZBREUPS
OMVSKERN    65541        1 25-09-02 ?      37:10  EZBTCPIP
OMVSKERN 16842760        1 25-09-02 ?      28:44  EZBTXLUR
OMVSKERN 33619977        1 25-09-02 ?      37:10  EZACFALG
OMVSKERN    65546        1 25-09-02 ?      00:25  /usr/sbin/syslogd -c -D 755
OMVSKERN    65547        1 25-09-02 ?      00:00  /usr/sbin/cron
```

```

OMVSKERN 50397196      1 25-09-02 ?      00:00  /usr/sbin/sshd -f /etc/ssh/
OMVSKERN 65562 50397196 25-09-02 ?      00:03  /usr/sbin/sshd -f /etc/ss
  USERX 16842779 65562 25-09-02 ?      00:10  /usr/sbin/sshd -f /etc/
  USERX 65564 16842779 25-09-02 tttyp0000 00:00  -sh
OMVSKERN 65549      1 25-09-02 ?      01h05  HSFUFSMN
OMVSKERN 65550      1 25-09-02 ?      00:00  FTPD
OMVSKERN 65551      1 25-09-02 ?      28:44  EZBTNINI
OMVSKERN 65552      1 25-09-02 ?      28:44  EZBTXLUS
OMVSKERN 65553      1 25-09-02 ?      28:44  EZBTMCTL
OMVSKERN 65554      1 25-09-02 ?      28:44  EZBTMST
OMVSKERN 65555      1 25-09-02 ?      28:44  EZBTMST
OMVSKERN 16842772 1 25-09-02 ?      02:10  PAGENT
OMVSKERN 16842773 1 25-09-02 ?      00:00  PORTMAP
OMVSKERN 65558      1 25-09-02 ?      37:10  EZBTLCLG
OMVSKERN 65559      1 25-09-02 ?      37:10  EZBTLCMN
OMVSKERN 65560      1 25-09-02 ?      37:10  EZBTLCLG
OMVSKERN 65561      1 25-09-02 ?      37:10  EZBTLCMN
  USERX 65570      1 25-09-02 ?      01h29  /u/home01a/userx/trg/bin/ss
  USERX 65571      1 25-09-02 ?      00:00  ssh -S none -fNR 2226:127.0
  USERX 65572      1 25-09-02 ?      00:00  sshd2
OMVSKERN 33620525 1 13:02:23 ?      00:05  EXEC
OMVSKERN 65542      0 70-01-01 ?      00:00
OMVSKERN 16842784 0 70-01-01 ?      00:00
***** Bottom of Data *****

```

Submenu option **7 PS** is used to display a hierarchical OMVS process tree, to facilitate examining running processes relevant to Tectia SSH.

2.3.6 Manual pages

Viewing Manual Pages

Among other documentation, Tectia provides Unix-style manpages, which may be viewed from the shell using the `man` command, but it is also possible to read them conveniently in ISPF browse, using `SSZASST` top-level option **6 MANP**.

```

=====
SSZ JS          Secure Shell Assistant          2023/11/19 12:56
Option ===> 6

0  SETM      Installation settings and defaults submenu
1  GENJ      Generate installation jobs
2  INST      Perform the step-by-step installation
3  CONF      Manage configuration files
4  TASK      Start/stop/modify started tasks
5  UTIL      Utility jobs to manage the installation
6  MANP      Browse the manual pages directory
7  STAT      Show status information about the installation

```

Manpages are organized in a directory structure, so one has to navigate to find the required page.

Applications such as the clients **sshg3**, **sftp3** and **scpg3** are under **cat1**, configuration file descriptions under **cat5**, and servers under **cat8**.

Enabling Manual Pages

The online manual pages for the product are installed to `/opt/tectia/man`. If you want your USS manual page tool (`/bin/man`) to be able to find the new manual pages, you will have to perform the following environment setup.

If you want to have the manual pages visible to all USS shell users, you must edit system-wide configuration files:

1. Add the following lines to file `/etc/profile`:

```
if test X$MANPATH = X ; then
  MANPATH= "/usr/man/%L"
fi
MANPATH= "/opt/tectia/man/%L:$MANPATH"
export MANPATH
```

2. Add the following lines to file `/etc/cshrc`:

```
if
(! $?MANPATH) setenv MANPATH "/usr/man/%L"
setenv MANPATH "/opt/tectia/man/%L:$MANPATH"
```

If you want to have the manual pages visible to just one user, you must edit two files in the user's home directory:

1. Add the following lines to `.profile` in the user's home directory:

```
if test X$MANPATH = X ; then
  MANPATH= "/usr/man/%L"
fi
MANPATH= "/opt/tectia/man/%L:$MANPATH"
export MANPATH
```

2. Add the following lines to file `.cshrc` in the user's home directory:

```
if (! $?MANPATH) setenv MANPATH "/usr/man/%L"
setenv MANPATH "/opt/tectia/man/%L:$MANPATH"
```

2.4 Removing the Tectia Server for IBM z/OS Software

To remove Tectia Server for IBM z/OS, run jobs `U01ZDEL`, `U02UNIN` and `U03DELU` in the Tectia SSH Assistant submenu **5 UTIL** ("Utility jobs to manage the installation").

MEMBER LIST SMITH.SSZ.INSTALL.CNTL						Row 0000001 of 0000005
						Scroll ==> PAGE
Name	Prompt	Size	Created	Changed	ID	
..... U01ZDEL		48	2023/11/19	2023/11/19 12:41:21	SMITH	
..... U02UNIN		54	2023/11/19	2023/11/19 12:41:45	SMITH	
..... U03DELU		31	2023/11/19	2023/11/19 12:41:16	SMITH	
..... U04MNT		29	2023/11/19	2023/11/19 12:41:22	SMITH	
..... U05UMNT		24	2023/11/19	2023/11/19 12:41:22	SMITH	
End						

The three jobs achieve the following:

1. `U01ZDEL` - Delete the previous installation ZFS



Caution

Use this job only if you are sure the ZFS is no longer needed, that is, if the product is to be uninstalled or has been successfully upgraded into a different ZFS.

2. `U02UNIN` - Delete the SSZ installation dataset



Caution

This job will delete all data set components of the SSZ installation: started task procedures, samples, parms, as well as the `/opt/tectia` symlink.

3. `U03DELU` - Delete the SSH server and SOCKS Proxy proxy users



Note

`U04MNT` and `U05UMNT` are jobs not related to removal. They can be run to mount and unmount a filesystem with logging. Can be useful for instance when working with multiple installations of Tectia.

Chapter 3 Getting Started with Tectia Server for IBM z/OS

This chapter provides information on how to get started with Tectia Server for IBM z/OS after it has been successfully installed.

It contains information on running the server, the required environment variables, and setting up a shell user.

Note

When accessing a z/OS host that runs Tectia Server using legacy OpenSSH **scp**, the OpenSSH **scp** binary must exist in `/bin/scp` on the z/OS host. Further, legacy OpenSSH **scp** cannot be used to transfer MVS datasets, as it does not support dataset access.

Non-legacy OpenSSH **scp** does not use the SCP protocol anymore but rather uses the SFTP protocol instead, allowing one to transfer MVS datasets and USS files. One can force the legacy option by using the **scp -O** flag.

Note

If you intend to use OpenSSH **scp** with Tectia Server for IBM z/OS, note that the default OpenSSH configuration on z/OS does not produce SMF records. SMF recording must be configured separately for OpenSSH when the OpenSSH **scp** events need to be captured.

The Tectia server component on z/OS consists of two processes:

- **sshd2**: the main Secure Shell server daemon
- **ssh-certd**: the Certificate Validator, a process used by **sshd2** when validating user certificates

3.1 Running the SSH Server (sshd2)

3.1.1 Starting the Server

Console

To run **sshd2** as a started task, use a JCL procedure such as **SSHD2** (shown below), by default **USER.PROCLIB(SSHD2)** (defined in [0.3 SETO](#)).

SSHD2:

```
//SSHD2    PROC  OPTS=' ',PORT=
//TECTIA  EXEC  PGM=BPXBATSL,
//                      REGION=0M,
//                      TIME=NOLIMIT,
//                      PARM=( 'PGM /opt/tectia/sbin/sshd2 -F &PORT      ①
//                      &OPTS' )
//STDENV   DD   DSN=<HLQ>.V676.PARMLIB(SSHENV),DISP=SHR
//STDOUT   DD   SYSOUT=*
//STDERR   DD   SYSOUT=*
//STDIN    DD   DUMMY
//                      PEND
```

① Note that when **sshd2** is run as a started task, the **-F** (foreground) option is required to prevent **sshd2** from detaching itself as a daemon. If **sshd2** is run as a started task without the **-F** option, it cannot be modified.

Start the server with the following operator command:

```
====> s sshd2
```

The **sshd2** job starts.

ISPF

In the Tectia SSH Assistant ISPF application you can manage SSH tasks via submenu **4 TASK**. Started tasks may be started, stopped and modified here, provided that the user is properly authorized and that the started task procedure has been generated and installed.

You can control the SSH server (**sshd2**) via submenu **4.1 TSRV**.

```

SSZ          Tasks : SSH Server          2015/11/19 11:51
Option ==>

Authorized console operators can control the SSH server here.

1  TSRVS      Start the SSH server
2  TSRVP      Stop the SSH server
3  TSRVR      Restart the SSH server
4  TSRVRF     Restart the SSH server, killing connections
5  TSRVQV     Query the version of the running SSH server
6  TSRVTR     Turn trace on or off in the running SSH server
7  TSRVOP     Set options for starting the SSH server

```

Figure 3.1. Tectia SSH Assistant ISPF application - Tasks: SSH Server (4.1 TSRV)

To start the server, enter option **4.1.1 TSRVS (Start the SSH server)**.

You should see the following console message:

```

ISF031I CONSOLE <USERID> ACTIVATED
-S SSHD2
+SSZ0006I Task sshd2 started

```

USS

Note

If you want to run the server manually from USS, the `sshd2` user needs to have a login shell defined. Modify the `ADDSSSH2` script accordingly.

To start the server manually, log on to Unix System Services (USS) as the `sshd2` user and execute the command:

```
> /opt/tectia/etc/init.d/sshd2 start
```

When the version string message appears, you may exit from the shell. The server will continue to run as a process without a controlling terminal. During the startup the server might report warnings that the server daemon cannot access the cryptographic hardware. Those are only warnings and the server starts without the cryptographic hardware mentioned in the warning messages.

3.1.2 Stopping the Server

Console

To stop the server under MVS when you are running it as a started task, enter:

```
==> F SSHD2,STOP
```

OR:

```
====> P SSHD2
```

ISPF

To stop the server in ISPF, enter the Tectia SSH Assistant option **4.1.2 TSRVP (Stop the SSH server)**.

You should see the following console message:

```
ISF031I CONSOLE <USERID> ACTIVATED
-P SSHD2
+SSZ0003I Command STOP accepted
+SSZ0005I Dispatching signal to S=<PID> (sshd2)
```

USS

Under USS, if you want just to stop the server (without restarting it), you can use the following command:

```
> /opt/tectia/etc/init.d/sshd2 stop
```

3.1.3 Restarting the Server

Console

To restart the server under MVS when you are running it as a started task, use the following console command:

```
====> F SSHD2,RESTART
```

When the server is restarted, existing connections will stay open until they are disconnected. If you have made configuration changes, existing connections will continue to use the old configuration settings while new connections will use the reconfigured settings. To ensure that the new settings will be used for all new connections, use the Tectia `sshg3` client option `--exclusive`. This way a new connection is opened for each connection attempt, instead of the Connection Broker reusing recently closed connections.

To kill existing connections and restart the server, use the `restart` command's `force` option:

```
====> F SSHD2,RESTART FORCE
```

User address spaces that were running before the stop will continue to run. Any changes to the configuration or keys will take effect when the daemon is restarted and when new user connections are established.

ISPF

To restart the server in ISPF, enter the Tectia SSH Assistant option **4.1.3 TSRVR (Restart the SSH server)**.

You should see the following console message:

```
ISF031I CONSOLE <USERID> ACTIVATED
-F SSHD2,RESTART
+SSZ0003I Command RESTART accepted
```

To kill existing connections and restart the server, enter the Tectia SSH Assistant option **4.1.4 TSRVRF (Restart the SSH server, killing connections)**.

3.1.4 Querying the Server Version

Console

You can query the version of the server with the following console command:

```
====> F SSHD2,VERSION
```

ISPF

To check the version of the server in ISPF, enter the Tectia SSH Assistant option **4.1.5 TSRVQV (Query the version of the running SSH server)**.

You should see the following console messages:

```
ISF031I CONSOLE <USERID> ACTIVATED
-F SSHD2,VERSION
+SSZ0003I Command VERSION accepted
+SSZ0004I Tectia Server for z/OS <version>
 SSZ0008I VC branch: <branch>
 SSZ0009I VC revision: <revision>
```



Note

If some of the console messages fail to show up, you can check them in the SDSF log.

3.1.5 Setting Options for Starting the Server

Console

You can enter command options (described in detail in [sshd2 Options](#)) as an OPTS parameter on the **start**. For example, configuration file options are entered in the following format (where *keyword* is a configuration file keyword):

```
====> S SSHD2,OPTS=' -okeyword=value '
```

For example, to set SftpSmfType to TYPE119, enter:

```
====> S SSHD2,OPTS=' -oSftpSmfType=TYPE119 '
```

The sshd2 started task can also be started with a user-specified job name:

```
====> S SSHD2,jobname=own_job_name
```

You can assign the SSHD2 user to the started task by defining the procedure in the STARTED class and entering the user ID in the STDATA segment, for example:


```
RDEFINE STARTED SSHD2.* STDATA(USER(SSHD2)GROUP(SYS1))
SETROPTS RACLIST(STARTED) REFRESH
```

ISPF

To set parameter options for starting the SSH server in ISPF, use the Tectia SSH Assistant option **4.1.7 TSR-VOP (Set options for starting the SSH server)**.

The available options are described in detail in [ssh2 Options](#).

The options you enter will be used when the server is started.

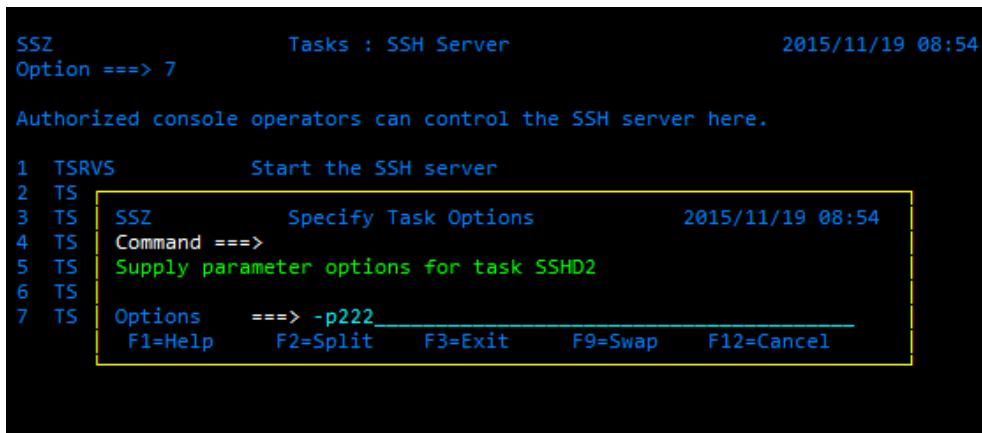

```
SSZ Tasks : SSH Server 2015/11/19 08:54
Option ==> 7

Authorized console operators can control the SSH server here.

1 TSRVS Start the SSH server
2 TS
3 TS SSZ Specify Task Options 2015/11/19 08:54
4 TS Command ==>
5 TS Supply parameter options for task SSHD2
6 TS
7 TS Options ==> -p222
F1=Help F2=Split F3=Exit F9=Swap F12=Cancel
```

Figure 3.2. Tectia SSH Assistant ISPF application - Setting port number

3.2 Running the Certificate Validator (ssh-certd)

3.2.1 Starting the Certificate Validator

Console

To run **ssh-certd** as a started task, use a JCL procedure such as **SSHCERTD** (shown below), by default **USER.PROCLIB(SSHCERTD)** (defined in [0.3 SETO](#)).

SSHCERTD:

```
//SSHCERTD PROC OPTS=' '
//TECTIACD EXEC PGM=BPXBATSL,
//           REGION=0M,
//           TIME=NOLIMIT,
//           PARM=( 'PGM /opt/tectia/sbin/ssh-certd -F
//                  &OPTS' )
//STDENV   DD  DSN=<HLQ>.V676.PARMLIB(SSHENV),DISP=SHR
//STDOUT   DD  SYSOUT=*
```

```
/*STDERR DD SYSOUT=*
//STDIN DD DUMMY
// PEND
```

Start the Certificate Validator with the following operator command:

```
===> S SSHCERTD
```

In the sample `SSHCERTD` script above, `ssh-certd` is started with the `foreground` option that disables the daemon mode. With the `foreground` option, the daemon does not spawn the process to background and the task name stays as `sshcertd`.

You can assign the `SSHD2` user to the started task by defining the procedure in the `STARTED` class and entering the user ID in the `STDATA` segment, for example:

```
RDEFINE STARTED SSHCERTD.* STDATA(USER(SSHD2)GROUP(SYS1))
SETROPTS RACLIST REFRESH
```

For more information, see [ssh-certd\(8\)](#).

ISPF

You can control the Certificate Validator (`ssh-certd`) via the Tectia SSH Assistant submenu **4.2 TCRT**.

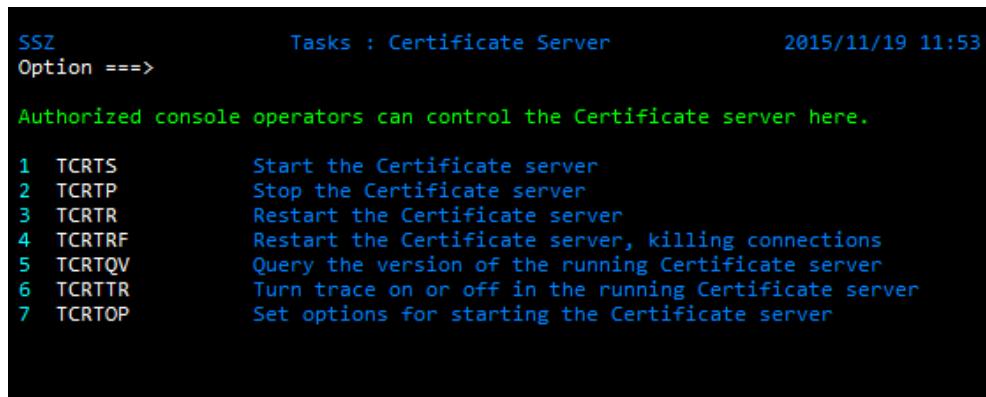


Figure 3.3. Tectia SSH Assistant ISPF application - Tasks: Certificate Server (4.2 TCRT)

To start the Certificate Validator, enter option **4.2.1 TCRTS (Start the Certificate server)**.

You should see the following console message:

```
ISF031I CONSOLE <USERID> ACTIVATED
-S SSHCERTD
+SSZ0006I Task ssh-certd started
```

3.2.2 Stopping the Certificate Validator

Console

To stop the Certificate Validator (without restarting it) under MVS when you are running it as a started task, enter the following console command:

```
====> F SSHCERTD,STOP
```

OR:

```
====> P SSHCERTD
```

ISPF

To stop the Certificate Validator in ISPF, enter the Tectia SSH Assistant option **4.2.2 TCRTP (Stop the Certificate server)**.

You should see the following console message:

```
ISF031I CONSOLE <USERID> ACTIVATED
-P SSHCERTD
+SSZ0003I Command STOP accepted
+SSZ0005I Dispatching signal to S=<PID> (ssh-certd)
```

3.2.3 Restarting the Certificate Validator

Console

To restart the Certificate Validator under MVS when you are running it as a started task, enter the following:

```
====> F SSHCERTD,RESTART
```

ISPF

To restart the Certificate Validator in ISPF, enter the Tectia SSH Assistant option **4.2.3 TCRTR (Restart the Certificate server)**.

You should see the following console message:

```
ISF031I CONSOLE <USERID> ACTIVATED
-F SSHCERTD,RESTART
+SSZ0003I Command RESTART accepted
```

3.2.4 Querying the Certificate Validator Version

Console

To query the version of the running Certificate Validator, enter the following console command:

```
====> F SSHCERTD,VERSION
```

ISPF

To query the version of the Certificate Validator in ISPF, enter the Tectia SSH Assistant option **4.2.5 TCRTQV (Query the version of the running Certificate server)**.

3.2.5 Setting Options for Starting the Certificate Validator

Console

As an OPTS parameter, you can give parameters that the actual Certificate Validator binary accepts (described in detail in [ssh-certd Options](#)). For example:

```
====> S SSHCERTD,OPTS=' -d 9 '
```

ISPF

To set options for starting the Certificate Validator in ISPF, enter the Tectia SSH Assistant option **4.2.7 TCRTOP**.

The available options are described in detail in [ssh-certd Options](#).

3.3 Environment Variables for Server and Client Applications

The environment variables `_BPXK_AUTOCVT`, `_BPX_SHAREAS` and `_BPX_BATCH_UMASK` must be set as shown in `<HLQ>.V676.PARMLIB(SSHENV)` and `sshsetenv` (located in `/opt/tectia/doc/zOS/samples`) when running Tectia Server for IBM z/OS programs (see below). The server startup procedures described in [Section 3.1](#) set these variables from the `STDENV` DD.

The format of `SSHENV` is used when the client or server programs are run under MVS, and `sshsetenv` is used when the programs are run from a USS command line.



Note

The environment files must not contain line numbers or reading them will fail.

SSHENV:

```
_BPXK_AUTOCVT=ON
_BPX_SHAREAS=NO
_BPX_BATCH_UMASK=0022
SSH_DEBUG_FMT="%W(72)(2) %Dd/%Dt/%Dy %Dh:%Dm:%Ds:%Df %m/%s:%n:%f %M"
_BPXK_JOBLOG=STDERR
_EDC_ADD_ERRNO2=1
```

sshsetenv:

```
export _BPXK_AUTOCVT=ON
export _BPX_BATCH_UMASK=0022
export _BPX_SHAREAS=NO
export SSH_DEBUG_FMT="%W(72)(2) %Dd/%Dt/%Dy %Dh:%Dm:%Ds:%Df %m/%s:%n:%f %M"
export _EDC_ADD_ERRNO2=1
```

The server will do coded character set conversion on request when transferring files. The `iconv` function is used for the conversion. `iconv()` uses the following environment variables (it is usually not necessary to change them):

_ICONV_UCS2

Tells `iconv_open(Y, X)` which type of a conversion method to set up when there is a choice between "direct" conversion from X to Y and "indirect" X to UCS-2 to Y.

_ICONV_UCS2_PREFIX

Tells `iconv_open()` which z/OS data set name prefix to use to find the UCS-2 tables if they cannot be found in the HFS.

3.4 Setting Up a Shell User

User accounts that are accessed via Tectia Server or that run Tectia client programs must have an OMVS segment in their RACF profile and, in most cases, a home directory in the USS file hierarchy. The home directory is required if public key authentication is used and if user-specific configuration is needed.

z/OS users that are going to use the Tectia Server for IBM z/OS client programs to access remote hosts need the same OMVS environment. For an example of creating a z/OS user for batch file transfers, see [Section 7.1](#).

To enable the user to open the shell or other daemon, you need to increase the maximum region size (in bytes) for address space of the WSA process. You can set a system-wide limit in `BPXPRMxx` and then set higher limits for individual processes.

For OMVS, increase the size of the address space to 75MB in the RACF user profile. Use the `RACF ADDUSER` or `ALTUSER` command to specify the `ASSIZEMAX` limit on a per-process basis as follows:

```
ALTUSER userid OMVS(ASSIZEMAX(75000000)
```

In batch jobs, `REGION=` sets the address space size. It can be used on the `JOB` statement or on the `EXEC` statement.

If you want to customize the environment per user for file transfer use, see *Tectia Server for IBM z/OS User Manual*.

3.4.1 Authenticating Remote Server Hosts

Remote Secure Shell servers are authenticated by a public-key procedure. The client trusts the server if it has a private key that matches one of the public keys in the global hostkeys directory or in the user's hostkeys directory. When a server presents a key that is not in the hostkeys directories, the user checks the fingerprint of the remote server's public key. When the user has approved the public key, it is stored in the user's `$HOME/.ssh2/hostkeys` directory and will be used automatically thereafter.

The verification step requires user interaction, so even for users that are set up to run client programs unattended, the first connection must be done by a person who logs in as the user, accesses the remote server, and goes through the fingerprint check dialog. The same steps must be repeated if the remote host's key is changed.

For more information on server authentication, see [Section 5.3](#) and *Tectia Server for IBM z/OS User Manual*.

3.4.2 Using Password Authentication

Password authentication is the most commonly used form of user authentication. It is enabled by default and uses the RACF system password of the user.

Note that when running Tectia client programs from the TSO OMVS pseudo-shell, the password that you type in will be shown on your screen in plaintext. You can avoid showing the password on your screen by invoking OMVS as follows:

```
TSO OMVS PF13(HIDE)
```

Start your client (in this example `sftpg3`) to request password:

```
sftpg3 --aa password hostname
username@hostname's password:
```

Press **P13** before typing in your password! This will temporarily hide the input data you type on the shell command line.

Other ways to avoid showing your password on the screen are using a real shell via telnet or SSH, or setting up public-key authentication using a private key without a passphrase.

There is one case where password authentication cannot be used in Tectia Server for IBM z/OS: When running Tectia client programs from JCL there is no facility for getting the password interactively from the user. You can have the password stored in a file or a data set, or preferably use public-key authentication and a private key without a passphrase (see [Section 5.6](#)).

For more information on password authentication, see [Section 5.5](#) and *Tectia Server for IBM z/OS User Manual*.

3.4.3 Using Public-Key Authentication

In public-key authentication, the server authenticates the user by the presence of the user's public key in the user's `$HOME/.ssh2` directory on the server. The public key ties the user ID to the user's private key stored on the client. Keys can be generated using the `ssh-keygen-g3` tool.

For more information on public-key authentication, see [Section 5.6](#) and *Tectia Server for IBM z/OS User Manual*.

3.5 SSH Connection Status

The SSH connection status can be found in the z/OS network TCP socket ApplData. SSSD2 process writes 40 bytes ApplData to TCP socket in EBCDIC encoding. The information is recorded in SMF type 119 sub type 2 (TCP connection termination record) as SMF119AP_TTAPPLDATA when the TCP connection terminates.

The SSH connection status can be viewed through the SDSF Network Activity panel or by issuing a TSO command.

Example TSO command:

```
netstat allc (appld SZS*
```

The example output displays two sets of information. The first is the TCP listener socket information (running server), the second shows the information of the TCP connection socket (an established connection).

```
MVS TCP/IP NETSTAT CS V2R5          TCPIP Name: TCPIP          08:16:20
User Id Conn      State
-----  ----  -----
SSHD2 0000017D Listen
  Local Socket: 0.0.0.0..22
  Foreign Socket: 0.0.0.0..0
  Application Data: SZS001,002,000
SSHD2 00000C6B Establish
  Local Socket: 192.168.3.90..22
  Foreign Socket: 10.1.70.80..50016
  Application Data: SZSbb-,bb-rPAuser      6.7.5.56 SSH Se
```

3.5.1 Interpreting ApplData format for TCP listener socket

TCP listener socket string example:

```
SZS001,002,000
```

Offset 0-2: 'Szs'

Offset 3-5: the number of concurrent ssh session in hex decimal format.

Offset 6: ','

Offset 7-9: the maximum number of concurrent ssh session in hex decimal format.

Offset 10: ','

Offset 11-13: summary statistics of the accumulated accept() EWOULDBLOCK counter. The counter is kept in software in a 64bits integer. Each character is a base64 digit. Following shows the sequence of base64 digits:

```
0123456789abcdefghijklmnopqrstuvwxyz
wxyzABCDEFGHIJKLMNOPQRSTUVWXYZ/+
```

If it is less than g00, it shows the value of the counter in base64 format. If it is greater than or equal to g00, the first character indicates the index of most significant bit of the 64 bits counter. The second and third character show the rightmost 12 bits of the counter in base64 format.

3.5.2 Interpreting ApplData format for TCP connection socket

TCP connection socket string example:

```
SZSbb-,bb-rPAuser 6.7.5.56 SSH Se
```

Offset 0-2: 'Szs'

Offset 3-5: Cryptographic algorithms used from server to client direction

Offset 3,7:

```

A: 3des-cbc
b: aes128-cbc, rijndael-cbc@ssh.com
#: aes192-cbc
B: aes256-cbc
c: aes128-ctr
+: aes192-ctr
C: aes256-ctr
d: gcm128@openssh.com, AEAD_AES_128_GCM
D: gcm256@openssh.com, AEAD_AES_256_GCM
```

Offset 4,8:

```

g: hmac-sha2-512
c: hmac-sha2-256, hmac-sha256-2@ssh.com
b: hmac-sha1
B: hmac-sha1-96
a: hmac-md5
A: hmac-md5-96
d: hmac-sha224@ssh.com
e: hmac-sha256@ssh.com
f: hmac-sha384@ssh.com
g: hmac-sha512@ssh.com
-: when cipher is gcm type.

```

Offset 5,9:

```

-: no compression
z: zlib
z: zlib@openssh.com

```

Offset 6: Number of session rekey performed

```

,: no session rekey has been performed.
0: 2^0, 1 session rekey has been performed.
1: 2^1, 2 or more session rekey has been performed.
2,3,4,5: 2^2, 2^3, 2^4, 2^5 or more session rekey has been performed.
6,7,8,9: 2^6, 2^7, 2^8, 2^9 or more session rekey has been performed.
a,b,...,z: 2^10, 2^11, ..., 2^35 or more session rekey has been performed.
A,B,...,Z: 2^36, 2^37, ..., 2^61 or more session rekey has been performed.
+,: 2^62, 2^63 or more session rekey has been performed.

```

Offset 7-9: Cryptographic algorithms used from client to server direction

Offset 10: Key exchange method used

```

a: ecdh-sha2-nistp521
b: ecdh-sha2-nistp384
c: ecdh-sha2-nistp256
d: diffie-hellman-group1-sha1
e: diffie-hellman-group14-sha1
f: diffie-hellman-group14-sha224@ssh.com
g: diffie-hellman-group14-sha256@ssh.com
h: diffie-hellman-group14-sha256
i: diffie-hellman-group15-sha256@ssh.com
j: diffie-hellman-group15-sha384@ssh.com
k: diffie-hellman-group16-sha384@ssh.com
l: diffie-hellman-group16-sha512@ssh.com
m: diffie-hellman-group16-sha512
n: diffie-hellman-group18-sha512@ssh.com
o: diffie-hellman-group18-sha512

```

```
p: diffie-hellman-group-exchange-sha1
q: diffie-hellman-group-exchange-sha256
r: curve25519-sha256,curve25519-sha256@libssh.org
s: ecdh-nistp521-kyber1024-sha512@ssh.com
t: curve25519-frodokey1344-sha512@ssh.com
u: sntrup761x25519-sha512@openssh.com
v: mlkem768nistp256-sha256
w: mlkem1024nistp384-sha384
x: mlkem768x25519-sha256
```

Offset 11: Successful user authentication method or status of username

```
P: Password authentication method.
K: User public key authentication method.
I: Username is invalid.
U: Username is undefined.
R: Username is revoked.
```

Offset 12: Channel types started

```
A: 'exec' or 'shell'.
B: 'subsystem' including sftp server.
C: both 'A' and 'B'.
```

Offset 13: Username requested from client.

Offset 25: The first 15 characters of the client ssh identification string.

Chapter 4 Configuring the Server

This chapter gives instructions on the basic configuration settings of the Tectia server component on z/OS.



Note

The server must be restarted after configuration changes. See [Section 3.1.3](#) for instructions.

4.1 Server Configuration Files

The following files and directories located in the `/opt/tectia/etc` directory are used to store the server configuration information:

- `sshd2_config`: the main server configuration file
- `ssh_certd_config`: the Certificate Validator configuration file
- `hostkey`: the default server host private key
- `hostkey.pub`: the default server host publickey
- `random_seed`: the random number seed file for cryptographic operations
- `knownhosts`: the global directory for remote client host public keys that are trusted for host-based authentication

The user-specific configurations are stored in each user's `$HOME/.ssh2` directory:

- `knownhosts`: the user-specific directory for remote client host public keys that are trusted for host-based authentication
- `authorization`: the default authorization file for user public keys

4.1.1 Editing Configuration Files

The default location for the configuration files is `/opt/tectia/etc`. You can edit the `sshd2_config` and `ssh_certd_config` files via the Tectia SSH Assistant or with your favorite text editor.

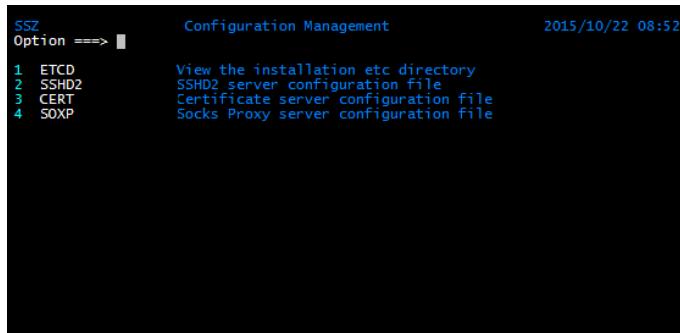


Figure 4.1. Tectia SSH Assistant Configuration Management menu (3 CONF)

The configuration files consist of keyword-value pairs, one per line. Lines starting with the hash character (#) as well as empty lines are interpreted as comments and ignored. The configuration file is read when the server is started and each time a new connection to the server is made. If the configuration file is faulty or cannot be found, the server will not start.

For a complete list of configuration options, see [sshd2_config\(5\)](#) and [ssh_certd_config\(5\)](#).

4.1.2 Command-Line Options

Command-line options can be used to configure the server in addition to the configuration file and environment variables. Command-line options override values specified in environment variables and the configuration file.

For a list of the available options, see [sshd2\(8\)](#).

4.1.3 Running Tectia and OpenSSH on the Same Host

Tectia Server for IBM z/OS always installs under `/opt/tectia`, so the Tectia and OpenSSH binaries can coexist in the system. The Tectia configuration files and host keys are stored in the `/opt/tectia/etc` directory, whereas OpenSSH uses the `/etc/ssh` directory. The Tectia user keys and other user-specific files are stored under `$HOME/.ssh2`, whereas OpenSSH uses `$HOME/.ssh`. The server port can be configured in the `/opt/tectia/etc/sshd2_config` file with the keyword `Port`. The default port number is 22, but it can be changed to any available port.

4.1.4 IPv6 Support

Tectia Server for IBM z/OS can operate using IPv4 (`inet`) addressing, IPv6 (`inet6`), or both (`any`), as specified by the `sshd2_config` keyword `AddressFamily`:

<code>AddressFamily</code>	<code>(inet inet6 any)</code>
----------------------------	-------------------------------

The default is `inet`.

The `ListenAddress` keyword can be specified several times. The value is an IPv4 address or an IPv6 address; either may be followed by an optional port number. If the configuration variable is not specified, `sshd2` listens on the IPv4 unspecified address (`0.0.0.0`) or the IPv6 unspecified address (`::`) or both depending on the value of `AddressFamily`.

`sshd2` will open listener sockets in the order the `ListenAddress` configuration variables occur in the configuration file. `sshd2` will not start unless it is able to open at least one socket. `sshd2` will not start if any of the sockets cannot be opened or does not belong to the address family specified in `AddressFamily` or by the `-4` or `-6` command line option.

4.2 Defining Subconfigurations

Subconfiguration files can be used to specify configuration options that apply only to connections by specific users or from specific hosts. The subconfiguration files have the same basic format as the main configuration file and they are divided into two categories: host-specific and user-specific.

If parsing of the subconfiguration files fails, the connection is terminated (for a host-specific configuration), or the access is denied by the server (for a user-specific configuration).

Most of the configuration options that work in the main file work also in the subconfiguration files, but some do not, where it either does not make sense to set them (for example, `ListenAddress` and `Port`, which only affect the process listening to the port, and would not affect that behavior in any way in a subconfiguration file) or it would be confusing (e.g. `AllowUsers` in a user-specific subconfiguration, and `AllowHosts` in a host-specific subconfiguration).

The value for `{Host,User}SpecificConfig` keywords is a pattern-filename pair, separated by whitespace. With `UserSpecificConfig`, the pattern is of format `user[%group]@[host]`, where `user` is matched with the user name and UID, `group` is matched with the user's primary and any secondary groups, both group name and GID, and `host` is matched as described under option `AllowHosts`. With `HostSpecificConfig`, the pattern is `host` (as in `UserSpecificConfig`).

Unlike the main configuration file, the subconfiguration files may have configuration blocks, or stanzas, in them. The subconfiguration heading is interpreted identically to what is described above, that is with `User-SpecificConfig` the pattern is of format `user[%group]@[host]`, and with `HostSpecificConfig` the format is `host`.



Note

It is possible to mix these configuration files. This is not recommended, because any global settings in these files would be set multiple times (which would not do any harm per se, but might lead to behavior not intended by the administrator).

Subconfiguration files are very flexible and because of that, dangerous if the logic of the files is not carefully planned. You can, for example, specify different authentication methods for different users and different banner messages for people coming from certain hosts. There are a lot of possibilities here.



Note

Host-specific subconfiguration files are always read before the user-specific subconfiguration files.

See the example file `/opt/tectia/etc/sshd2_config.example` and the host-specific and user-specific files in `/opt/tectia/etc/subconfig`.

4.2.1 Host-Specific Subconfiguration

The host-specific configuration files are configured with the `HostSpecificConfig` variable. These files are read immediately after a new process is launched to handle the connection. Thus most configuration options can be set in these. The syntax is the following:

```
HostSpecificConfig pattern subconfig-file
```

pattern will be used to match the client host as specified under `AllowHosts` on the [sshd2_config\(5\)](#) man page. The file subconfig-file will then be read, and configuration data amended accordingly.

The file is read before any actual protocol transactions begin, and you can specify most of the options allowed in the main configuration file. You can specify more than one subconfiguration file, in which case the patterns are matched and the files read in the specified order. Values of configuration options defined later will either override or amend the previous value depending on the option. The effect of redefining an option is described in the documentation for that option. For example, setting `Ciphers` in the subconfiguration file will override the old value, but setting `AllowUsers` will amend the value.

Example 1: The following matches (from) any host:

```
HostSpecificConfig    .* /opt/tectia/etc/subconfig/host_ext.conf
```

Example 2: The following matches a subnet mask:

```
HostSpecificConfig    \m192.168.0.0/16    /opt/tectia/etc/subconfig/host_int.conf
```

For more information, please see [sshd2_subconfig\(5\)](#) and [sshd2_config\(5\)](#).

4.2.2 User-Specific Subconfiguration

User-specific subconfiguration files are read when the client has stated the user name it is trying to log in as. At this point, the server will obtain additional information about the user: does the user exist, what is the user's UID, and what groups the user belongs to. With this information, the server can read the user-specific configuration files specified with `UserSpecificConfig` in the main configuration file. The syntax is the following:

```
UserSpecificConfig pattern subconfig-file
```

You can use patterns of the following form:

```
user[%group][@host]
```

where `user` is matched with the user name and UID, `group` is matched with the user's primary and secondary groups, both group name and GID, and `host` is matched as described under `AllowHosts` on the `sshd2_config(5)` man page.

For example, the following would match any user in group "sftp" connecting from example.com:

```
.*%sftp@example\.com
```

Example 1: The following matches to users from `ssh.com` who have two-character user names or the user name `sj1`, and who belong to the group `wheel`.

```
UserSpecificConfig (..|sj1)%wheel@ssh\.com  /opt/tectia/etc/subconfig/user_conf
```

Example 2: The following matches the user `anon` from any host:

```
UserSpecificConfig  anon@.*  /opt/tectia/etc/subconfig/anon_conf
```

See the `sshd2_subconfig(5)` man page for more information.

4.3 Configuring Cryptographic Algorithms

Note

Algorithm names are case-sensitive.

4.3.1 Configuring Ciphers

The algorithm(s) used for session encryption can be specified in the `sshd2_config` file:

```
Ciphers      aes128-cbc,3des-cbc
```

Currently supported cipher names are the following:

aes128-ctr	aes128-gcm@openssh.com	aes192-cbc
aes192-ctr	aes256-gcm@openssh.com	aes256-cbc

aes256-ctr	aes128-cbc	3des-cbc
------------	------------	----------

Special values for this option are the following:

- `Any`: includes all supported ciphers.
- `AnyStd`: includes ciphers from the IETF SSH standards. The standard ciphers are `aes128-ctr`, `aes192-ctr`, `aes256-ctr`, `aes128-gcm@openssh.com`, `aes256-gcm@openssh.com`, `aes128-cbc`, `aes192-cbc`, `aes256-cbc`, `3des-cbc`.
- `AnyCipher`: allows any available cipher.
- `AnyStdCipher`: the same as `AnyStd`.

The default ciphers are `aes128-ctr`, `aes192-ctr`, `aes256-ctr`, `aes128-gcm@openssh.com`, `aes256-gcm@openssh.com`, `aes128-cbc`, `aes192-cbc`, `aes256-cbc` and `3des-cbc`.

4.3.2 Configuring MACs

The MAC (Message Authentication Code) algorithm(s) used for data integrity verification can be selected in the `sshd2_config` file:

MACs	hmac-sha1	hmac-sha384@ssh.com
hmac-sha1	hmac-sha256-2@ssh.com	hmac-sha384@ssh.com
hmac-sha1-96	hmac-sha224@ssh.com	hmac-sha2-512
hmac-sha2-256	hmac-sha256@ssh.com	hmac-sha512@ssh.com

Special values for this option are the following:

- `Any`: includes all supported MACs.
- `AnyStd`: includes MACs from the IETF SSH standards (`hmac-sha1`, `hmac-sha1-96`, `hmac-sha2-256`, `hmac-sha2-512`).
- `AnyMac`: the same as `Any`.
- `AnyStdMac`: the same as `AnyStd`.

The default MAC algorithms are: `hmac-sha1`, `hmac-sha1-96`, `hmac-sha2-256`, `hmac-sha256-2@ssh.com`, `hmac-sha224@ssh.com`, `hmac-sha256@ssh.com`, `hmac-sha384@ssh.com`, `hmac-sha2-512`, and `hmac-sha512@ssh.com`.

4.3.3 Configuring KEXs

The key exchange (KEX) algorithm(s) used for key exchange can be selected in the `sshd2_config` file. Multiple KEXs can be specified as a comma-separated list.

```
KEXs      diffie-hellman-group14-sha1,diffie-hellman-group14-sha224@ssh.com
```

The supported KEX algorithms are the following:

diffie-hellman-group1-sha1	diffie-hellman-group16-sha512@ssh.com
diffie-hellman-group14-sha1	diffie-hellman-group18-sha512@ssh.com
diffie-hellman-group14-sha256	diffie-hellman-group-exchange-sha1
diffie-hellman-group16-sha512	diffie-hellman-group-exchange-sha256
diffie-hellman-group18-sha512	ecdh-sha2-nistp256
diffie-hellman-group14-sha224@ssh.com	ecdh-sha2-nistp384
diffie-hellman-group14-sha256@ssh.com	ecdh-sha2-nistp521
diffie-hellman-group15-sha256@ssh.com	curve25519-sha256
diffie-hellman-group15-sha384@ssh.com	curve25519-sha256@libssh.org
diffie-hellman-group16-sha384@ssh.com	

The supported PQC hybrid KEX algorithms are:

ecdh-nistp521-kyber1024-sha512@ssh.com	mlkem768nistp256-sha256
curve25519-frodokey1344-sha512@ssh.com	mlkem1024nistp384-sha384
sntrup761x25519-sha512@openssh.com	mlkem768x25519-sha256

Special values for this option are the following:

- **Any:** includes all supported KEX algorithms.
- **AnyStd:** includes the following KEXs from the IETF SSH standards: `ecdh-sha2-nistp256`, `ecdh-sha2-nistp384`, `ecdh-sha2-nistp521`, `diffie-hellman-group14-sha1`, and `diffie-hellman-group1-sha1`.
- **AnyKEX:** the same as `Any`.
- **AnyStdKEX:** the same as `AnyStd`.

The default KEX algorithms are: `ecdh-sha2-nistp521`, `ecdh-sha2-nistp384`, `ecdh-sha2-nistp256`, `diffie-hellman-group14-sha1`, `diffie-hellman-group14-sha256`, `diffie-hellman-group16-sha512`, `diffie-hellman-group18-sha512`, `diffie-hellman-group14-sha256@ssh.com`, `curve25519-sha256`, `curve25519-sha256@libssh.org`, `ecdh-nistp521-kyber1024-sha512@ssh.com`, `curve25519-frodokey1344-sha512@ssh.com`, `sntrup761x25519-sha512@openssh.com`, `mlkem768nistp256-sha256`, `mlkem1024nistp384-sha384`, `mlkem768x25519-sha256`.

4.3.4 Configuring Host Key Signature Algorithms

The host key signature algorithms to be used in server authentication and host-based authentication can be selected in the `sshd2_config` file using the `HostKeyAlgorithms` keyword. The keyword defines the host key signature algorithms that the server will propose and accept to authenticate the host. Using the keyword, it is possible to enable only certain hash functions, such as SHA-2. A message is signed with a hash generated using a signature algorithm and then verified by the receiver using the same signature algorithm. Multiple host key algorithms can be specified as a comma-separated list.

HostKeyAlgorithms	ssh-dss-sha224@ssh.com
-------------------	------------------------

The client defines the order of host key signature algorithms. The client should have at least one algorithm in common with the server configuration. The supported signature algorithms are the following:

rsa-sha2-256	ssh-rsa-sha384@ssh.com
rsa-sha2-512	ssh-rsa-sha512@ssh.com
ssh-dss	x509v3-sign-rsa
ssh-dss-sha224@ssh.com	x509v3-sign-rsa-sha224@ssh.com
ssh-dss-sha256@ssh.com	x509v3-sign-rsa-sha256@ssh.com
ssh-dss-sha384@ssh.com	x509v3-sign-rsa-sha384@ssh.com
ssh-dss-sha512@ssh.com	x509v3-sign-rsa-sha512@ssh.com
x509v3-sign-dss	ecdsa-sha2-nistp256
x509v3-sign-dss-sha224@ssh.com	ecdsa-sha2-nistp384
x509v3-sign-dss-sha256@ssh.com	ecdsa-sha2-nistp521
x509v3-sign-dss-sha384@ssh.com	x509v3-ecdsa-sha2-nistp256
x509v3-sign-dss-sha512@ssh.com	x509v3-ecdsa-sha2-nistp384
ssh-rsa	x509v3-ecdsa-sha2-nistp521
ssh-rsa-sha224@ssh.com	ssh-ed25519
ssh-rsa-sha256@ssh.com	

Special values for this option are the following:

- `Any`: includes all supported host key signature algorithms.
- `AnyStd`: includes the following signature algorithms from the IETF SSH standards: `x509v3-sign-dss`, `x509v3-sign-rsa`, `ssh-dss`, `ssh-rsa`, `x509v3-ecdsa-sha2-nistp521`, `x509v3-ecdsa-sha2-nistp384`, `x509v3-ecdsa-sha2-nistp256`, `ecdsa-sha2-nistp521`, `ecdsa-sha2-nistp384`, and `ecdsa-sha2-nistp256`.
- `AnyHostKeyAlgorithm`: the same as `Any`.
- `AnyStdHostKeyAlgorithm`: the same as `AnyStd`.

The default host key signature algorithms are:

ecdsa-sha2-nistp256	ssh-rsa-sha256@ssh.com
---------------------	------------------------

ecdsa-sha2-nistp384	ssh-dss
ecdsa-sha2-nistp521	ssh-dss-sha256@ssh.com
x509v3-ecdsa-sha2-nistp256	x509v3-sign-dss
x509v3-ecdsa-sha2-nistp384	x509v3-sign-dss-sha256@ssh.com
x509v3-ecdsa-sha2-nistp521	x509v3-sign-rsa
ssh-rsa	x509v3-sign-rsa-sha256@ssh.com

4.3.5 Configuring Public Key Signature Algorithms

The public key signature algorithms to be used in client authentication can be selected in the `sshd2_config` file using the `AuthPublicKey.Algorithms` keyword. The keyword defines the public key signature algorithms that the server will propose and accept to authenticate the user. Using the keyword, it is possible to enable only certain hash functions, such as SHA-2. A message is signed with a hash generated using a signature algorithm and then verified by the receiver using the same signature algorithm. Multiple public key algorithms can be specified as a comma-separated list.

AuthPublicKey.Algorithms	ssh-dss-sha224@ssh.com
--------------------------	------------------------

The client defines the order of public key signature algorithms. The client should have at least one algorithm in common with the server configuration. The supported signature algorithms are the following:

rsa-sha2-256	ssh-rsa-sha384@ssh.com
rsa-sha-512	ssh-rsa-sha512@ssh.com
ssh-dss	x509v3-sign-rsa
ssh-dss-sha224@ssh.com	x509v3-sign-rsa-sha224@ssh.com
ssh-dss-sha256@ssh.com	x509v3-sign-rsa-sha256@ssh.com
ssh-dss-sha384@ssh.com	x509v3-sign-rsa-sha384@ssh.com
ssh-dss-sha512@ssh.com	x509v3-sign-rsa-sha512@ssh.com
x509v3-sign-dss	x509v3-ssh-rsa
x509v3-sign-dss-sha224@ssh.com	x509v3-rsa2048-sha256
x509v3-sign-dss-sha256@ssh.com	ecdsa-sha2-nistp256
x509v3-sign-dss-sha384@ssh.com	ecdsa-sha2-nistp384
x509v3-sign-dss-sha512@ssh.com	ecdsa-sha2-nistp521
x509v3-ssh-dss	x509v3-ecdsa-sha2-nistp256
ssh-rsa	x509v3-ecdsa-sha2-nistp384
ssh-rsa-sha224@ssh.com	x509v3-ecdsa-sha2-nistp521
ssh-rsa-sha256@ssh.com	ssh-ed25519

Special values for this option are the following:

- Any: includes all supported signature algorithms.
- AnyStd: includes the following signature algorithms from the IETF SSH standards: `ecdsa-sha2-nistp256`, `ecdsa-sha2-nistp384`, `ecdsa-sha2-nistp521`, `x509v3-ecdsa-sha2-nistp256`, `x509v3-ecdsa-sha2-`

nistp384, x509v3-ecdsa-sha2-nistp521, x509v3-sign-dss, x509v3-sign-rsa, ssh-dss, and ssh-rsa.

- `AnyPublicKeyAlgorithm`: the same as `Any`.
- `AnyStdPublicKeyAlgorithm`: the same as `AnyStd`.

The default public key signature algorithms are:

<code>rsa-sha2-256</code>	<code>ssh-rsa</code>
<code>rsa-sha2-512</code>	<code>ssh-rsa-sha256@ssh.com</code>
<code>ecdsa-sha2-nistp256</code>	<code>ssh-dss</code>
<code>ecdsa-sha2-nistp384</code>	<code>ssh-dss-sha256@ssh.com</code>
<code>ecdsa-sha2-nistp521</code>	<code>x509v3-sign-dss</code>
<code>x509v3-ecdsa-sha2-nistp256</code>	<code>x509v3-sign-dss-sha256@ssh.com</code>
<code>x509v3-ecdsa-sha2-nistp384</code>	<code>x509v3-sign-rsa</code>
<code>x509v3-ecdsa-sha2-nistp521</code>	<code>x509v3-sign-rsa-sha256@ssh.com</code>

4.3.6 Cryptographic Hardware Support

Tectia Server for IBM z/OS can use the CP Assist for Cryptographic Functions (CPACF) and Cryptographic Coprocessors such as the CryptoExpress feature.

CPACF can be used to secure SSH network traffic with the AES algorithms for encryption (see [Section 4.3.1](#)) and the message authentication codes that are based on SHA-1 or SHA-2 (see [Section 4.3.2](#)). Note that the longer key lengths do not have CPACF support on all mainframe models.

The CPACF support for SHA-1 and SHA-2 is also used for digest calculations in key exchange and authentication.

The Tectia Server for IBM z/OS random number generator (RNG) can use cryptographic hardware support when adding entropy to its internal state. Tectia Server for IBM z/OS uses the ICSF Random Number Generate callable service if it is available (it requires a CryptoExpress feature). It will also use `/dev/random` if it is available.

Cryptographic hardware may be used in certificate-based authentication if the keys and certificates are stored in SAF and use RSA or ECC. Keys generated with the **RACDCERT** command can be stored in the Crypto-Express device or stored encrypted with a master key.

To use cryptographic hardware in Tectia Server for IBM z/OS the machine must be enabled for cryptography and the z/OS Integrated Cryptographic Service Facility (ICSF) must be active.

The configuration parameter **UseCryptoHardware** specifies how the cryptographic hardware is to be used. The value is a list of support values for algorithm groups and it may include a default support level. The support levels are:

- no - use the software implementation
- yes - use cryptographic hardware if available, otherwise software
- must - use cryptographic hardware, fail server startup if not available.

The algorithm groups are:

- rng - random number generator
- sha - SHA-1 and SHA-2 digest algorithms
- aes - AES algorithms
- 3des - Triple DES

sha1 may be used as a synonym of sha.

An example of the configuration parameters:

```
UseCryptoHardware yes,aes:must,sha:must
```

RACF users can control the use of the ICSF services with the CSFSERV class. If the class is defined, SSHD2, the user that runs the Tectia Server for IBM z/OS server, must have READ access to the CSFRNG profile if the random number generator support is to be used and to the CSFOWH profile if SHA support is to be used.

Enabling Use of IBM Crypto Express Card (CEX)

To enable cryptographic hardware you need to enable the CSFSERV profiles for all client, and server IDs in RACF. See [Appendix I](#) for instructions.

Ciphers AES-CBC, AES-CTR, AES-GCM, and 3DES-CBC, and Macs hmac-sha* are shifted to CEX card, if they are configured in sshd2_config. CPACF will be used by default. However, the total main CP usage will not be reduced.

CEX related configuration parameters in sshd2_config are:

```
#      CryptoCardCipherIOThreshold      65536
Specifies the minimum size of cipher request that will be routed to
IBM cryptographic co-processor card (CEX), if the card is available and
UseCryptoHardware is set to yes/must, for cipher processing. If the
request size is less than the CryptoCardCipherIOThreshold value, the
cipher request will be routed to CPACF facility. Special values are
0 route all cipher requests to IBM cryptographic co-processor card
65536 or higher route all cipher requests to CPACF facility

#      CryptoCardMACGenerate          no
Specifies whether to route MAC generation request to IBM cryptographic
co-processor card (CEX). If it is set to yes, MAC generation request will
route to IBM cryptographic co-processor card (CEX), if the card is available
and UseCryptoHardware is set to yes/must, for MAC generation processing.
```

To use cryptographic hardware in Tectia Server for IBM z/OS the machine must be enabled for cryptography, and the z/OS Integrated Cryptographic Service Facility (ICSF) must be active. If IBM Crypto Express Card (CEX) is installed, Tectia Server for IBM z/OS will direct cipher operations to the co-processors in CEX via ICSF. The co-processors in CEX must be initialized with the master keys which are the same keys used to initialize the key data sets. You can refer to chapter *Using the pass phrase initialization utility in IBM z/OS ICSF Administrator's Guide* to initialize the co-processors in CEX.



Note

There is a bug (APAR QA52113) in ICSF when processing AES cipher request on CEX card. We recommend you to install the related PTF when it is available. Toleration logic is implemented in v6.6 to bypass the deficiency.

4.3.7 Compressions

You can define the enabled compression methods for SSH connections in the `sshd2_config` file, using the `Compressions` keyword.

```
Compressions none,zlib
```

The available compression methods are:

- `none`
- `zlib`

To disable compression, set:

```
Compressions none
```

4.4 Configuring Root Logins

If you want to give someone permission to login directly to the root login account via Secure Shell, you can define three methods of control with the `PermitRootLogin` configuration parameter in the `sshd2_config` file:

The default value `yes` enables root logins with any authentication method:

```
PermitRootLogin yes
```

Use the value `no` to disable all logins with root privileges:

```
PermitRootLogin no
```

With the value `nopwd` root logins are allowed only when an authentication method other than password is used:

```
PermitRootLogin    nopwd
```

It is also possible to create a separate subconfiguration file for `root`. See [Section 4.2](#) for more information.

4.5 Restricting User Logins

By default, Tectia Server for IBM z/OS does not impose any login restrictions in addition to those provided by the operating system. However, you can restrict connections based on host, user name, or group.

The restrictions are defined in the `sshd2_config` file using the following syntax:

```
keyword          pattern
```

Note

All the patterns used in the examples below are in accordance with the `egrep` syntax, which is the default regular expression syntax in Tectia Server for IBM z/OS.

Table 4.1. Examples of commonly used regular expressions and conventions with egrep syntax

Regex	Description
<code>.*</code>	matches everything
<code>.</code>	any character
<code>\.</code>	literal <code>.</code>
<code>[:alpha:]+</code>	any lower or uppercase alphabet character one or more times
<code>(80 8080)</code>	either 80 or 8080

The regex syntax can be chosen by using the `metaconfig` block in the beginning of `sshd2_config` and `ssh_certd_config` files:

```
## SSH CONFIGURATION FILE FORMAT VERSION 1.1
## REGEX-SYNTAX egrep
## end of metaconfig
```

Possible values of `REGEX-SYNTAX` are `ssh`, `egrep`, `zsh_fileglob` and `traditional`. For more information, see [sshregex\(1\)](#).

Previous versions of SSH Secure Shell (3.1 and earlier) always use the `zsh_fileglob` syntax.

Available keywords are the following:

- [AllowHosts](#) / [DenyHosts](#)

Login is allowed/denied from hosts whose name matches one of the specified patterns.

Example 1: Listing complete hostnames

```
AllowHosts      localhost, example\.com, friendly\.example
```

This allows connections only from specified hosts.

Example 2: Using patterns with hostnames

```
AllowHosts      h..s.\..*
```

This pattern matches, for example, house.foobar.com, house.com, but not house1.com. Note that you have to input the string "\." when you want to specify a literal dot.

Example 3: Using patterns with IP addresses

```
AllowHosts      ([[:digit:]]{1\,3}\.){3}[[[:digit:]]{1\,3}]
```

This pattern matches any IP address (xxx.xxx.xxx.xxx). However, some host's hostname could also match this pattern.

Example 4: Using \i

```
AllowHosts      "\i192.*\.3"
```

When \i is used in the beginning of a pattern, only the host IP addresses are used. The above pattern matches, for example, 192.0.0.3.

- [AllowSHosts / DenySHosts](#)

The .shosts, .rhosts, /etc/shosts.equiv and /etc/hosts.equiv entries are honored only for hosts whose name matches one of the specified patterns. It is recommended to use these keywords with host-based authentication.

- [AllowUsers / DenyUsers](#)

Login is allowed/denied as users whose name matches one of the specified patterns.

Example 1: Using complete user names

```
DenyUsers      devil@evil\.example,warezdude,1337
```

This denies login as devil when the connection is coming from evil.example. It also denies login (from all addresses) as warezdude and as user whose UID is 1337.

Example 2: Using patterns with user names

```
AllowUsers      "sj*,s[:digit:]+,s(jl|amza)"
```

This pattern matches, for example, sjj, sjjj, s1, s123, and samza but not s1x or slj.

Example 3: Using \i

```
AllowUsers      "sjl@\i192.*\..3"
```

This would allow login as user sj1 from only those hosts whose IP address matches the specified pattern.

- **AllowGroups / DenyGroups**

Login is allowed/denied when one of the groups the user belongs to matches one of the specified patterns.

Example 1

```
AllowGroups      root,staff,users
```

4.6 Configuring Code Pages

The code page and the line delimiter for terminal sessions can be configured with a series of configuration variables in the `sshd2_config` file. The variables have default values, which can be overridden with global, host-specific, or user-specific configurations.

The server supports the **chcp** command on interactive sessions. The command is typically used in the user's `.profile` logon script to set the code page to be applied in the terminal connections. For details, see the IBM document *z/OS USS User's Guide*.

<code>ShellTransferCodeset</code>	<code>ISO8859-1</code>
<code>ShellTransferLineDelimiter</code>	<code>UNIX</code>
<code>ShellAccountCodeset</code>	<code>IBM-1047</code>
<code>ShellAccountLineDelimiter</code>	<code>UNIX</code>
<code>ShellTranslateTable</code>	<code>" "</code>
<code>ShellConvert</code>	<code>yes</code>

See also [Section 6.1](#).

4.7 Defining Subsystems

Subsystems can be defined in the `sshd2_config` file using the following syntax:

```
subsystem-<name>      argument
```

The `argument` is the command which will be executed when the subsystem is requested.

```
$ sshg3 user@remote -s <name>
```

The `argument` can be a list of commands separated with a semicolon (`:`), or it can, for example, refer to a script.

One example of a subsystem is **sftp**.

```
subsystem-sftp      /opt/tectia/libexec/sft-server-g3
```

4.8 Auditing

Tectia Server for IBM z/OS logs events with `syslog`. Logging (auditing) is very important for security. You should check the logs often, or use tools to analyze them. From the logs, you can see whether unauthorized access has been attempted, and take further action if needed. For example, you could add the hosts from which the attempts have been made to `DenyHosts`, or drop the packets from the domain completely at your firewall.

4.8.1 Configuring Logging in sshd2

`sshd2` logs to the facility specified with the configuration option `SysLogFacility`. If the option is not set, `sshd2` logs to the `AUTH` facility.

For example, if you want `sshd2` to log to the `LOCAL1` facility, you need to add the following setting to your server's configuration (`/opt/tectia/etc/sshd2_config`):

```
SysLogFacility LOCAL1
```

You also need to modify `syslog`'s configuration, so it knows where to put the log messages.

In `/etc/syslog.conf` (or equivalent):

```
local1.info /var/log/sshd2
```

On some systems, this file may need to exist before `syslog` will write to it, so you may need to create it:

```
# touch /var/log/sshd2
```

If `syslog` accesses files with a non-root UID, for example `logger`, you need to change the ownership of the file to that user.

Remember to restart both `sshd2` and `syslogd` after making changes to their configuration files.

The following log facilities are available for `SysLogFacility`:

DAEMON	LOCAL0	LOCAL3	LOCAL6
USER	LOCAL1	LOCAL4	LOCAL7
AUTH	LOCAL2	LOCAL5	

4.8.2 Logging SFTP Transactions

The logging of SFTP transactions by the `sft-server-g3` subsystem can be controlled with the `sftpSysLogFacility` option. It accepts the same values as `SysLogFacility` (see [Section 4.8.1](#)). The default facility is `DAEMON`.

4.8.3 SMF Auditing

System Management Facilities (SMF) collect data for auditing. **sshd2** writes SMF records for failed login attempts. The **sft-server-g3** subsystem writes SMF records for the following events:

- Download a file (retrieve)
- Upload a file (store)
- Append data to a file
- Rename a file
- Delete a file

scpg3 and **sftpg3** clients write SMF records for the following events:

- Download to local file (store)
- Upload local file (retrieve)

The SMF record type for the **sshd2** server and the **sft-server-g3** subsystem can be defined with the **sftpSmfType** option in the server configuration (`/opt/tectia/etc/sshd2_config`):

```
SftpSmfType      TYPE119
```

For the **scpg3** and **sftpg3** clients the SMF record type can be defined in the `SSH_SFTP_SMF_TYPE` environment variable. The only available SMF record type is `TYPE119`.

Note that it is also possible to route syslog daemon messages to be stored in SMF record type 109. For details, see the IBM document *z/OS V1R6.0 CS: IP Configuration Reference, SC31-8776-07*, chapter "Syslog daemon".

Note

If you intend to use OpenSSH SCP with Tectia Server for IBM z/OS, note that the default OpenSSH configuration on z/OS does not produce SMF records. SMF recording must be configured separately for OpenSSH when the OpenSSH SCP events need to be captured.

Required Permissions for SMF Records

The caller of the SMF service must be permitted to the `BPX.SMF` facility class profile:

- The `SSHD2` user must be permitted to the `BPX.SMF` facility class profile so that **sshd2** can create SMF records for users logging in and out.
- Each user that can transfer files must be permitted to the `BPX.SMF` facility class profile so that **sft-server-g3**, **scpg3**, and **sftpg3** can create SMF records for file transfers.

Give the following commands to set up the permissions:

```
RDEFINE FACILITY BPX.SMF UACC(NONE)
PERMIT BPX.SMF CLASS(FACILITY) ID(SSHD2) ACCESS(READ)
PERMIT BPX.SMF CLASS(FACILITY) ID(specific_username) ACCESS(READ)
SETROPTS RACLIST(FACILITY) REFRESH
```

Changes in SMF TYPE119 Messages

All SMF records produced by **sshd2**, **sft-server-g3**, **scpg3**, and **sftpg3** are based on SMF type 119 record format described in the IBM document *z/OS V1R6.0 CS: IP Configuration Reference, SC31-8776-07*. Only subtypes 70 (FTP server transfer completion record), 72 (FTP server logon failure record), and 3 (FTP client transfer completion record) are used.

New values are used for `SMF119FT_FSLoginMech` in the FTP server security section and for `SMF119FT_FFLLoginMech` in the FTP server login failure security section:

- `K` (0xD2) - public-key authentication
- `H` (0xC8) - host-based authentication.

In common TCP/IP identification section, new TCP/IP subcomponent values are used to distinguish the SFTP server and client from the FTP server and client. Value `SSHS` is used in **sshd2**, `SFTPS` is used in **sft-server-g3**, and `SFTPC` is used in file transfer clients **scpg3** and **sftpg3**.

4.9 Securing the Server

By default, the configuration of Tectia Client and Server is aimed toward usability. If you want to have a minimal, high-security configuration, you have to disable some functionality. This applies to both the client and the server.

This section presents four use case examples for restricting server configuration: restrictions to system administration, file transfer and tunneling, and load control.

4.9.1 Restrictions to System Administration

Secure system administration is the traditional use case for Secure Shell.

Disabling Root Login

Usually, allowing direct root logins from the network is a bad idea. It is better to use forced commands to automate tasks requiring privileges (described in the section called “[Forced Commands \(with Public Keys\)](#)” below), and make people use `su` or `sudo` to elevate privileges otherwise.

In addition to `AllowUsers` and `DenyUsers`, you can easily disable root logins with passwords (see [Section 4.4](#)). Define the following in your `sshd2_config` file:

```
PermitRootLogin    nopwd
```

This way, jobs automated with forced commands will work.

Disabling Tunneling

If you are sure you or your users do not need to create tunnels (possibly going around firewall restrictions or such), you can disable tunneling (port forwarding) altogether by adding the following to your `sshd2_config` file:

```
AllowTcpForwarding no
```

If you need more fine-grained control, consider using `AllowTcpForwardingForUsers` (and related keywords `DenyTcpForwardingForUsers`, `AllowTcpForwardingForGroups` and `DenyTcpForwardingForGroups`). With `ForwardACL` you can even allow and deny tunnels based on originator and destination (based on the IP address and port). See [Section 4.9.3](#).

Disabling Terminal Access

If you only want to enable file transfers or tunneling for users in group `users`, you can disable terminal access with the configuration variable `Terminal.DenyGroups` in your `sshd2_config` file:

```
Terminal.DenyGroups users
```

Other related keywords that can be used are: `Terminal.AllowUsers`, `Terminal.DenyUsers` and `Terminal.AllowGroups`.

It is recommended to deny also agent forwarding if terminal access is denied in `sshd2_config`:

```
AllowAgentForwarding no
```

Note that the users will be able to use SFTP and other subsystems defined in the Tectia Server for IBM z/OS configuration. Any other "exec" and "shell" requests will be denied for the users. This includes forced commands with public keys described in [the section called “Forced Commands \(with Public Keys\)”](#) and the legacy style password changing when performed as forced command.

Forced Commands (with Public Keys)

If you have maintenance jobs requiring non-interactive access to your server, use public-key authentication and forced commands. This way, if the private key is compromised, the public key cannot be used to perform anything other than the predetermined command on the server. (This is, of course, also bad, but it would be worse if the malicious attacker would have unrestricted access to the machine.)

Do not use the root account for jobs where it is not absolutely necessary.

You can set up a forced command in the authorization file.

```
key backup-key.pub
options command="tar zxvf - /usr/local"
```

This would, on a successful login with `backup-key.pub`, force a backup job to start.

You can also use the command that was given on the **sshg3** command line:

```
key backup-key.pub
options command="echo $SSHG3_ORIGINAL_COMMAND"
```

Running **sshg3**:

```
% sshg3 localhost kukkuu
Authentication successful.
kukkuu
%
```

For more information on the public-key options in the authorization file, see [Section 5.6.2](#).

Note that if the user or the user's group has been denied terminal access (with the **Terminal.DenyUsers** or **Terminal.DenyGroups** keywords), also forced commands will be denied.

Restricting Connections

Tectia Server for IBM z/OS can be configured to reject connection attempts from unknown hosts. For example the following allows connections only from the internal network 10.1.0.0/8 IP addresses and from an external host with the IP address 195.20.116.1:

```
AllowHosts          \i10\.1\..*,\i195\.20\.116\.1
```

See [Section 4.5](#) for information on the regular expression syntax and for more configuration examples and options.

On systems with several network interfaces, Tectia Server for IBM z/OS can also be bound to a specific network interface so that the server can be only accessed from the intended network. For example, the following will bind the listener to address 10.1.60.25 using port 2222:

```
ListenAddress      10.1.60.25
Port              2222
```

Logging

Tectia Server for IBM z/OS logs are most important for auditing. The logs also provide troubleshooting information, for example, when user authentication fails and a user is unable to log in. Please see [Section 4.8](#) for more information.

Notification

It is recommended to notify the users before they decide to log in that their actions are logged. In some jurisdictions this is required.

To display for example the following text to the users before login, the banner message saved to `/opt/tec-tia/etc/ssh_banner_message` can be used:

```
Unauthorized use of this system is prohibited.  
All actions are logged.
```

4.9.2 Restrictions to File Transfer

If Tectia Server for IBM z/OS is used for file transfer only, it is advisable to disable tunneling and terminal access to the server.

Enabling the SFTP Subsystem

To allow the users to connect with SFTP to Tectia Server for IBM z/OS, the secure file transfer subsystem has to be defined in the `sshd2_config` file:

```
subsystem-sftp    /opt/tectia/libexec/sft-server-g3
```

Restricting Access to User's MVS User Catalog

To restrict the users' access with SFTP, the `--attribute=zos-access` option can be specified with `sft-server-g3`:

```
subsystem-sftp    /opt/tectia/libexec/sft-server-g3 --attribute=zos-access:value
```

The values for the `zos-access` attribute are:

- `mvs`: User is allowed access only to the MVS side of the server.
- `usercatalog`: User is allowed access only to the MVS side of the server and only to his/her own catalog.
- `hfs`: User is allowed access only to the HFS side of the server.
- `mvs,hfs` or `hfs,mvs` or `all`: User is allowed access to both MVS and HFS sides of the server. No access restrictions are active.
- `usercatalog,hfs` or `hfs,usercatalog`: User is allowed access to the HFS side of the server and to the MVS side of the server but only to his/her own catalog.

The values are case-insensitive. You can use both "MVS" or "mvs". The values cannot include white spaces. Value "mvs,hfs" works, but "mvs, hfs" does not.

Example 1

To start `sft-server-g3` so that user can only access his/her own MVS catalog:

```
sft-server-g3 --attribute=zos-access:usercatalog
```

Example 2

To start `sft-server-g3` so that only HFS can be accessed:

```
sft-server-g3 --attribute=zos-access:hfs
```

Setting Up Security for Processing Offline Data Sets

Tectia Server for IBM z/OS can control who is permitted to request offline data sets to be mounted. Tape data sets are typically offline and a DASD data set is offline if the volume it resides on is not mounted. To control mounting, the System Authorization Facility (RACF, ACF2, or TSS) facility `SSZ.MOUNT` must be defined. When it is defined Tectia requires that the user has at least `READ` access before it requests a data set to be mounted. If `SSZ.MOUNT` is not defined there is no restriction on mounting.

The restriction is enforced both by the server and by the `sftp3` and `scpg3` client programs.

In addition to having permission to request mounts, the user must also specify the file transfer attribute `automount=yes` for Tectia to allocate a data set with mounts allowed.

Tectia first attempts to allocate a data set without allowing the system to do a mount. If this fails because the data set is offline, and the user has the required permission, Tectia repeats the allocation and allows the system to mount the data set. The user can instruct Tectia to omit the first allocation by specifying `automount=immed`.

Note that a user who can open a shell or issue remote commands with Tectia has other ways of causing tape mount requests. To control tape mounts effectively, do the following steps:

1. Define `SSZ.MOUNT` with universal permission `NONE`:

```
RDEFINE FACILITY (SSZ.MOUNT) UACC(NONE)
```

2. Set up the users who are to be allowed to mount tapes as file-transfer only users as instructed above ([the section called “Restricting Access to User's MVS User Catalog”](#)).
3. Give these users `READ` access to `SSZ.MOUNT`:

```
PERMIT SSZ.MOUNT CLASS(FACILITY) ID(SRVACC1) ACCESS(READ)
```

4. After each command refresh the `RACLIST`:

```
SETROPTS RACLIST(FACILITY) REFRESH
```

Disabling Tunneling

If you are sure you or your users do not need to create tunnels (possibly going around firewall restrictions or such), you can disable tunneling (port forwarding) altogether by adding the following to your `sshd2_config`:

```
AllowTcpForwarding no
```

Note that this disables also transparent FTP tunneling through the server.

Disabling Terminal Access

The following configuration option of Tectia Server for IBM z/OS will deny the group `sftpusers` terminal access.

```
Terminal.DenyGroups      sftpusers
```

4.9.3 Restrictions to Tunneling

Tectia Client can be used to tunnel FTP traffic, as well as TN3270 connections from a Windows workstation to the mainframe. Also other applications can be tunneled.

The following examples show how to restrict tunneling services for certain groups and how to deny terminal and file transfer services.

Please see [Section 4.2](#) for information on user-specific configurations if more fine-grained control is needed over the services.

Restricting Tunneling

Tunneling with Tectia Client uses only local tunnels (port forwarding). The tunnels are established based on the configuration of the application being tunneled. For more information about tunneling principles, see the *Tectia Client User Manual*.

The following configuration options of Tectia Server for IBM z/OS will deny remote port forwarding and allow local port forwarding for all users for example to `http://webserver.example.com` or `https://web-server.example.com`.

```
AllowTcpForwarding      yes
ForwardACL             deny remote .* .*
ForwardACL             allow local .* .*\.example\.com%(80|443)
```

The format for the value of the `ForwardACL` option is the following:

```
(allow|deny) (local|remote) user-pat forward-pat [originator-pat]
```

`user-pat` is used to match the client user, in the same way as in the `UserSpecificConfig` option.

With local port forwarding, `forward-pat` is a pattern of format `host-id[%port]`. `host-id` will match with the target host of the forwarding, in the same way as in the `AllowHosts` option. `port` will match the target port. If the client attempts to open the forwarding using a DNS name, the IP is looked up from the DNS, which will be used to match the pattern.

Note that the `ForwardACL` forward pattern defined with a DNS name does not match if the tunneled application uses IP addresses instead of DNS names for connections. The forward pattern defined with an IP address will match to both.

With local port forwarding, `originator-pat` will match the originator address that the client has reported. However, restrictions based on the source address of local port forwarding are normally not reliable because the client can forge the source address. `originator-pat` should be used only if the client can be trusted (for example, if it is administered by yourself).

If you specify any allow directives, all forwardings in that class (local or remote) not specifically allowed will be denied. If a forwarding matches both allow and deny directives, the forwarding will be denied.

Also, if you have specified any of the options `{Allow,Deny}TcpForwardingFor{Users,Groups}` or `AllowTcpForwarding`, and the forwarding for the user is disabled with those options, an allow directive will not re-enable the forwarding for the user.

The following example denies all forwarding for the `sftpusers` group. Other users are denied remote forwarding. User `root` is allowed all local forwarding. User `tunnelu` is allowed local forwarding only to the Telnet port (23) of addresses `*.example.com`, and the forwarding must originate from the client machine local address (`127.0.0.1`), it cannot be forwarded from a third host (this assumes that the client machines are trusted).

```
AllowTcpForwarding      yes
DenyTcpForwardingForGroups  sftpusers
ForwardACL            deny remote .* .*
ForwardACL            allow local root .*
ForwardACL            allow local tunnelu *.example.com%23 127.0.0.1
```

See [Section 4.5](#) for more information on the egrep regular expression syntax used in configurations.

Note that the users with terminal (shell) access are restricted only in the Tectia Server for IBM z/OS configuration and can, for example, set up their own port forwardings. See [Section 4.9.1](#) for more information.

Disabling Terminal Access

The following configuration option of Tectia Server for IBM z/OS will deny the user `tunnelu` terminal access.

```
Terminal.DenyUsers      tunnelu
```

Disabling File Transfers

To deny all users the access to the SFTP server, change the default SFTP subsystem configuration option of Tectia Server for IBM z/OS to:

```
subsystem-sftp
```

4.9.4 Load Control

The purpose of load control is to help keep Tectia Server for IBM z/OS running when the load is high (that is, the number of current connections is near the maximum allowed number of connections). High load might be caused by a connection flood denial-of-service attack that tries to make the server unavailable to its intended users by using so much of its resources that normal service is disrupted.

Load control is implemented by keeping a "white list" of the IP addresses of connections that have had a successful authentication. When Tectia Server for IBM z/OS starts, the white list is empty. When the server's load is high, connections from IP addresses that are not on the white list (that is, connections that have not recently had a successful authentication) are discarded.

Load control uses four configuration variables in the `sshd2_config` file: `MaxConnections`, `LoadControl.Active`, `LoadControl.DiscardLimit`, and `LoadControl.WhitelistSize`.

Note

It is recommended to set `LoadControl.Active` to `yes`, and `MaxConnections` to a proper value to prevent `sshd2` from forking too many processes which might exceed the `USS BPXPRMxx MAXPROCSYS` value. It is also recommended to set `MaxConnections` to roughly half of the `MAXPROCSYS` value. Adjust the values of `TcpListenBacklog`, `TcpListenRate`, and `TcpListenPause` according to your CPU and network speeds.

The level of load is measured by how near the number of the server's current connections is to `MaxConnections`, the maximum number of connections that the server will handle simultaneously. The argument for `MaxConnections` is a positive number. The default value is `1000`, and the value `0` (zero) means that the number of connections is not limited. `MaxConnections` must be greater than `1` when load control is used.

`LoadControl.Active` can have a value of `yes` or `no`. The default value is `no` (load control is disabled). To enable load control, set `LoadControl.Active` to `yes`.

Note

If `MaxConnections` is set to `0` or `1`, load control is disabled even if you have set `LoadControl.Active` to `yes` in the `sshd2_config` file.

When the number of concurrent connections is greater than `LoadControl.DiscardLimit`, connections from IP addresses that have not recently had a successful authentication are discarded. When the number of concurrent connections is not greater than `LoadControl.DiscardLimit`, connections are accepted from any IP address (subject to restrictions defined with `AllowHosts` and `DenyHosts`). The allowed value range of `LoadControl.DiscardLimit` is from `1` to `MaxConnections-1`. The default value is 90 percent of the value of `MaxConnections`. If you have not defined any configuration settings (that is, only `sshd2_config` default values are used), the value of `LoadControl.DiscardLimit` is `900`.

Tectia Server for IBM z/OS keeps a list of the IP addresses of connections that have had a successful authentication. This "white list" has space for a fixed number of unique IP addresses, specified by `LoadControl.WhitelistSize`. The default value of `LoadControl.WhitelistSize` is `1000`.

Chapter 5 Authentication

The Secure Shell protocol used by Tectia Server for IBM z/OS provides mutual authentication – the client authenticates the server and the server authenticates the client user. Both parties are assured of the identity of the other party.

The Secure Shell server host can authenticate itself using either traditional public-key authentication or certificate authentication.

Different methods can be used to authenticate Secure Shell client users. These authentication methods can be combined or used separately, depending on the level of functionality and security you want.

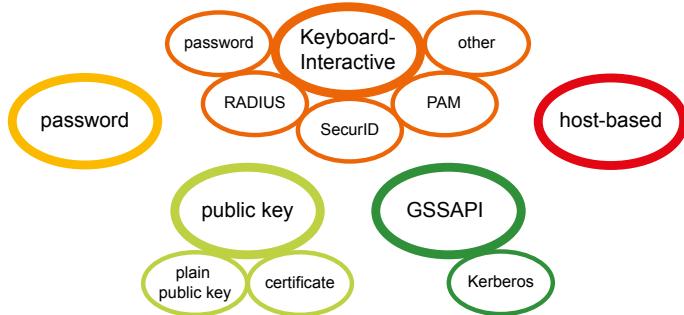


Figure 5.1. Secure Shell user authentication methods. Note that all of the methods are not available on z/OS.

Tectia Server for IBM z/OS allows public-key and password authentication by default. It also supports keyboard-interactive and host-based authentication.

5.1 Supported User Authentication Methods

The following user authentication methods are supported in the Tectia client/server solution.

Table 5.1. User authentication methods supported by the Tectia client/server solution

Authentication method	Tectia Server			Tectia Client, and client tools on Server for IBM z/OS		
	Unix ^a	Windows	z/OS	Unix ^a	Windows	z/OS
Password	x	x	x	x	x	x
Public-key	x	x	x	x	x	x
Certificate	x	x	x ^b	x	x	x ^b
Host-based	x	x	x	x		x
Keyboard-interactive	x	x	x	x	x	x
PAM ^c	x			x	x	x
RSA SecurID ^c	x	x		x	x	x
RADIUS ^c	x	x		x	x	x
GSSAPI/Kerberos	x	x		x	x	

^a Including Tectia Server for Linux on IBM System z.

^b Including certificates in files and SAF certificates.

^c Through keyboard-interactive.

5.2 Using the z/OS System Authorization Facility

Tectia Server for IBM z/OS supports X.509 certificates and RSA/ECC keys managed by the z/OS System Authorization Facility (SAF). For more information, see [Section 5.4.2](#) and [Section 5.7.3](#). If SAF keys are going to be used, the users need permissions to access the relevant facilities.

Tectia Server for IBM z/OS uses the Integrated Cryptographic Services Facility (ICSF) if the `UseCryptoHardware` configuration variable allows it (see [Section 4.3.6](#)) or keys and certificates are stored in the System Authorization Facility (SAF) and the keys are of type ICSF or PCICC (see [Section 5.4.2](#) and [Section 5.7.3](#)). SAF will control the use of cryptographic services if the `CSFSERV` class is activated and will control the access to cryptographic keys if the `CSFKEYS` class is activated.

When using SAF private keys, the server or client user needs access to the `CSFDMSG` resource in the `CSFSERV` class. The private keys can be secured by permitting access to a resource in the `CSFKEYS` class. The name of the resource is the label of the key in the ICSF key database.

See the IBM document *z/OS ICSF Administrator's Guide*, chapter "Controlling Who Can Use Cryptographic Keys and Services" for instructions on how to use generic resource names, how to give permissions to user groups and connect users to groups, and how to define auditing.

The users (including the `SSHD2` user) must have at least READ access to the `IRR.DIGTCERT.LISTRING` facility. If a user needs access to a key ring belonging to another user, he must have UPDATE access to the facility. This case will arise when using a `KnownHostsEkProvider` for checking host certificates, because host certificates are best entered as SITE keys and are not owned by the verifier.

5.3 Server Authentication with Public Keys in File

The server is authenticated with a digital signature based on a DSA, RSA or ECDSA public-key algorithm. At the beginning of the connection, the server sends its public key to the client for validation.

5.3.1 Defining Server Host Key

The key pair used for server authentication is defined on the server in the `sshd2_config` file with the following parameters:

<code>HostkeyFile</code>	<code>hostkey</code>
<code>PublicHostKeyFile</code>	<code>hostkey.pub</code>

During the setup process, one RSA key pair (with the file names `hostkey` and `hostkey.pub`) is generated and stored in the `/opt/tectia/etc` directory. By default this key pair is used for server authentication. Make sure that only the user running `sshd2` has access to the private key.

In Tectia Server for IBM z/OS, each server daemon can have only one host key pair. This is different from Tectia Server on other platforms.

By default, the server uses a public key with the file name of the private key plus the extension `.pub`. The `PublicHostKeyFile` keyword has to be defined only if the public-key file is stored with a different file name.

5.3.2 Generating the Server Host Key Pair

The host public-key pair (2048-bit RSA) is generated during the installation of Tectia Server for IBM z/OS by running job `KEYGH` generated by Tectia SSH Assistant installation step [1.15 KEYGEN](#). You only need to regenerate the host key pair if you want to change it.

`KEYGH` invokes a tool called `ssh-keygen-g3` (located in `/opt/tectia/bin`) that generates the host key pair:

```
//KEYGH EXEC SSZPBPX,BPX=BPXBATCH
//STDPARM DD *
SH /opt/tectia/bin/ssh-keygen-g3 -H ❶ -P ❷ -t rsa ❸
  -c "Tectia Server key for $(hostname) generated at $(date)" ❹
  -b 2048 ❺
//STDENV DD *
```

- ❶ The key pair will be stored in the default host key directory (`/opt/tectia/etc`).
- ❷ The key will be saved without a passphrase.
- ❸ The type of the key will be RSA.
- ❹ This line generates the key comment. The `'$(uss_command)'` is a z/OS USS Shell command substitution. The `uss_command` in between `$()` is executed and the output replaces `$(uss_command)`. In the JCL example `$(hostname)` is substituted by the output of USS `hostname` command. In the JCL example `$(date)` is substituted by the output of USS `date` command.

⑤ The length of the key will be 2048 bits.

Because the key pair is generated in such a way that the private key has no passphrase (option `-P`), the server will start up without any operator interaction to enter a passphrase. Protect the key with file system access rules. The private key (`/opt/tectia/etc/hostkey`) must be accessible only by the `sshd2` user.

For more information on the key generation options, see the *Tectia Server for IBM z/OS User Manual* or the **ssh-keygen-g3** man page.

To (re)generate the host key in UNIX, perform the following tasks:

1. Use `su` to switch to a UID 0 user (if you are not already logged in as one).
2. Run **ssh-keygen-g3** to generate the host key, for example:

```
# /opt/tectia/bin/ssh-keygen-g3 -t ecdsa -b 256 -P /opt/tectia/etc/hostkey
```

This will generate a 256-bit ECDSA key pair without a passphrase and store it under `/opt/tectia/etc`.

3. Restart the server.

5.3.3 Using an OpenSSH Server Host Key

Tectia Server for IBM z/OS can use a key created with OpenSSH as the server host key. The key must be configured with the `HostKeyFile` option in `sshd2_config` or have the default file names, `hostkey` and `hostkey.pub`.

Both RSA and DSA keys of sizes from 512 to 4096 bits or more are supported, as well as ECC keys of sizes 256, 384, and 521 bits.

5.3.4 Notifying the Users of the Host Key Change

Administrators that have other users connecting to their server should notify the users of the host key change. If you do not, the users will receive a warning the next time they connect because the host key the users have saved on their disk for your server does not match the host key now being actually provided by your server. The users may not know how to respond to this error.

You can run the following to display a fingerprint of your new public host key which you can provide to your users via some unalterable method (for example, by a digitally signed e-mail or by displaying the fingerprint on a secured bulletin board):

```
$ /opt/tectia/bin/ssh-keygen-g3 -F hostkey.pub
```

When the users connect and receive the error message about the host key having changed, they can compare the fingerprint of the new key with the fingerprint you have provided to them, and ensure that they are connecting to the correct `sshd2` daemon. Inform your users that they should notify you if the fingerprints do not

match, or if they receive a message about a host key change and do not receive a corresponding message from you notifying them of the change.

This procedure can help ensure that you do not become a victim of a man-in-the-middle attack, as your users will notify you if the host key fingerprints do not match. You will also be aware if the users encounter host key change messages when you have not regenerated your host key pair.

If you want to avoid the risk associated with the first connection, you can do one of the following:

- As an administrator of both the client and server machines, you can copy the server public key in advance to the global `hostkeys` directory on the client computer as `key_22_<hostname>.pub` (where `<hostname>` is the hostname the client uses when it connects to the server). The location of this directory depends on the operating system:
 - On Tectia client tools for z/OS: `/opt/tectia/etc/hostkeys`
 - On Tectia Client on Unix: `/etc/ssh2/hostkeys`
 - On Tectia Client on pre-Vista Windows: "`C:\Documents and Settings\All Users\Application Data\SSH\HostKeys`"
 - On Tectia Client on Windows Vista and later Windows versions: "`C:\ProgramData\SSH\HostKeys`"

In this case, manual fingerprint check is not needed, and you can also set the `strict-host-key-checking` option in the `ssh-broker-config.xml` file on the client to `yes`. After this, Tectia Client will refuse to connect if the server's public key is not in the `hostkeys` directory.

- The server administrator can also send the public host key to the users via an unalterable method. The users can save the key in their `$HOME/.ssh2/hostkeys` directory as `key_22_<hostname>.pub`. If all remote host keys are received in this manner, the `strict-host-key-checking` option can be enabled on the client.

5.4 Server Authentication with Certificates

Tectia Server for IBM z/OS includes two implementations of certificate authentication. One is based on keys and X.509 certificates in files and software cryptography. This is the same implementation that is available in Tectia products on other platforms. The other implementation is based on keys and certificates managed by the z/OS System Authorization Facility (SAF) and cryptographic operations handled by the z/OS Integrated Cryptographic Service Facility (ICSF).

The two implementations can be combined or used separately. The Tectia validation can use trusted keys stored in file or in SAF, or the SAF validation can be used alone.

SAF Validation

ICSF is the interface to hardware cryptographic devices. Tectia Server for IBM z/OS benefits from the higher security and performance that these devices provide for keys and certificates managed by SAF.

Tectia Server for IBM z/OS also supports SAF keys that do not use hardware crypto devices, the so-called NON-ICSF keys. For these keys, the cryptographic operations are performed in software.

The interface to SAF in Tectia Server for IBM z/OS is implemented with a Tectia External Key Provider. The External Key Providers are configured with specification strings in a configuration file or on a command line.

Tectia Server for IBM z/OS validates public keys by matching them against trusted keys stored in the file system.

SAF does a limited form of certificate checking that only determines which SAF user is the owner of the certificate. SAF does not check the contents of the certificate, such as the validity period, or check for certificate revocation. Instead of revoking a certificate the site can reduce the user's access rights in SAF.

A trusted key provider must be configured if SAF certificate checking is to be used.

To enable SAF checking of remote Secure Shell servers, their certificates can be entered into SAF as SITE keys and placed on a key ring for the trusted key provider.

Tectia Certificate Validation

The Tectia Certificate Validator does a full validation of the certificate and can be configured to use external PKI services such as LDAP servers that store revocation information.

When a trusted key provider is configured, the Tectia validator takes its trusted CA certificates from SAF, otherwise they are read from files.

Tectia Server for IBM z/OS can be configured to support either public-key or certificate authentication. With certificate authentication, the private key and certificate can be stored either in SAF or in file.

It is also possible to configure the server to use a key from SAF and use only the public key extracted from the certificate for authentication.

If a SAF key is configured but the key cannot be found or ICSF is required but not available, the server will issue an error message and will not start up.

5.4.1 Certificates Stored in File

To configure Tectia Server for IBM z/OS to authenticate itself using X.509 certificates from file, perform the following tasks:

1. Enroll a certificate for the server. This can be done, for example, with the **ssh-cmpclient-g3** or **ssh-scepclient-g3** command-line tools.

Note that the DNS address extension (dns) in the certificate needs to correspond to the fully qualified domain name of the server.

Example: Key generation and enrollment using **ssh-cmpclient-g3**:

```
# ssh-cmpclient-g3 INITIALIZE \
-p 62154:secret \
-P generate://ssh2@rsa:2048/testserv-rsa \
-s "C=FI,O=SSH,CN=testserv;dns=testserv.ssh.com" \
-o /opt/tectia/etc/testserv-rsa \
-S http://fw.example.com:1080 \
http://pki.example.com:8080/pkix/ \
'C=FI, O=SSH, CN=Test CA 1'
```

For more information on **ssh-cmpclient-g3** and **ssh-scepclient-g3**, see their man pages.

2. Define the private key and the server certificate in the `/opt/tectia/etc/sshd2_config` file, for example, using the key and certificate created above:

```
HostKeyFile          testserv-rsa.prv
HostCertificateFile testserv-rsa-0.crt
HostKey.Cert.Required no
```

Setting the `sshd2_config` option `HostKey.Cert.Required` to yes defines that the server must authenticate with a certificate. When keys in file are used, a certificate must be defined with the `HostCertificateFile` option. Setting the option to no (default) means that the server can use either a normal public key or a certificate, depending on which of them is configured. Setting the option to optional means that the server can use both a certificate and the public key found in the certificate.

3. Restart the server as instructed in [Section 3.1.3](#).

5.4.2 Certificates Stored in SAF

The following example assumes that the `SSHD2` user created in [Section 2.3.4](#) is used to run the server.

To use SAF certificates for authenticating the server, do the following steps. Replace the names and IDs with those appropriate to your system:

1. Create the server host key in SAF by giving the following TSO commands:

```
RACDCERT ID(SSHD2) GENCERT SUBJECTSDN(CN('LPAR1') OU('RD') \
O('EXAMPLE')) SIZE(2048) WITHLABEL('LPAR1.EXAMPLE.COM')
RACDCERT ID(SSHD2) LIST
```



Note

The above command will create a 2048-bit RSA key. If you want to, for example, create a 521-bit ECC key, replace `SIZE(2048)` with:

```
SIZE(521) NISTECC
```

2. Give the following TSO command to generate the certification request:

```
RACDCERT ID(SSHD2) GENREQ(LABEL('LPAR1.EXAMPLE.COM'))  
DSN('SSHD2.LPAR1.CRT.REQ')
```

3. Use the PKCS#10 certification request in the data set 'SSHD2.LPAR1.CRT.REQ' to enroll the certificate. The actual steps depend on your CA setup.
4. After the enrollment is completed, store the received certificate to a data set, for example 'SSHD2.LPAR1.CRT'.
5. To connect the new certificate to a key ring, give the following TSO commands:

```
RACDCERT ID(SSHD2) ADD('SSHD2.LPAR1.CRT') TRUST  
WITHLABEL('LPAR1.EXAMPLE.COM')  
RACDCERT ID(SSHD2) ADDRING(SSH-HOSTKEY)  
RACDCERT ID(SSHD2) CONNECT(ID(SSHD2) LABEL('LPAR1.EXAMPLE.COM'))  
RING(SSH-HOSTKEY) USAGE(PERSONAL)  
RACDCERT ID(SSHD2) LISTRING(SSH-HOSTKEY)
```

6. For the settings to take effect, give the following TSO command:

```
SETROPTS RACLIST(DIGTCERT) REFRESH
```

7. Define the z/OS SAF external key provider in the `/opt/tectia/etc/sshd2_config` file:

```
HostKeyEkProvider      zos-saf  
HostKeyEkInitString    "KEYS(ID(SSHD2) RING(SSH-HOSTKEY)  
LABEL('LPAR1.EXAMPLE.COM'))"  
HostKey.Cert.Required  yes
```

Note that `HostKeyEkInitString` must point to a single private key. Setting `HostKey.Cert.Required` to yes defines that the server must authenticate with a certificate. When the z/OS SAF provider is used, setting the option to no means that only the public key found in the SAF certificate is used. Setting the option to optional means that both the SAF certificate and the public key found in the SAF certificate are used.

For more information on the configuration file options, see [sshd2_config\(5\)](#). For information on the format of the external key initialization string, see [ssh-externalkeys\(5\)](#).

5.5 User Authentication with Passwords

The password authentication method is the easiest to implement, as it is enabled by default. Password authentication uses the RACF system password of the user.

To allow password authentication, make sure that the `AllowedAuthentications` keyword of the `/opt/tectia/etc/sshd2_config` configuration file on the server contains the argument `password`:

```
AllowedAuthentications      password
```

Other authentication methods can be listed in the configuration file as well.

To allow the users to change expired passwords, uncomment the following line in the `/opt/tectia/etc/sshd2_config` file:

```
AuthPassword.ChangePlugin      ssh-passwd-plugin
```



Note

With passwords, it is also possible to use keyboard-interactive authentication. See [Section 5.8](#) for more information.

5.6 User Authentication with Public Keys in File

Public-key authentication is based on the use of digital signatures and provides very good authentication security. To use public-key authentication, the user must first create a key pair on the client, and upload the public key to the server.

5.6.1 Enabling Public-Key Authentication

To enable user public-key authentication on Tectia Server for IBM z/OS (it is allowed by default), make sure the `AllowedAuthentications` keyword in the `/opt/tectia/etc/sshd2_config` file contains the argument `publickey`:

```
AllowedAuthentications  publickey
```

Other authentication methods can be listed in the configuration file as well.

5.6.2 Using the Authorization File

Tectia Server for IBM z/OS requires an authorization file that lists the user public keys that are authorized for login.

The default location for the authorization file is `$HOME/.ssh2/authorization`. The file location can be changed with the `AuthorizationFile` keyword in the `sshd2_config` file.

The authorization file contains a list of public key file names each preceded by the keyword `key`. If there is more than one `key`, they are all authorized for login.

Authorization File Options

It is possible to define different settings in the authorization file depending on which key is used in public-key authentication. The authorization file has the same general syntax as the `sshd2_config` configuration file. The following keywords may be used:

Key

This is followed by the file name of a public key in the user configuration directory (by default, `$HOME/.ssh2`) that is used for identification when contacting the host. If there is more than one key defined, they are all acceptable for login.

Options

This keyword, if used, must follow the `key` keyword above. The various options are specified as a comma-separated list.

The following `options` can be used:

allow-from and **deny-from**

In addition to public-key authentication, the canonical name of the remote host must match the given pattern(s). These parameters follow the logic of the `AllowHosts` and `DenyHosts` keywords of `sshd2_config`. Specify one pattern per keyword; multiple keywords can be used.

command="command"

This is used to specify a "forced command" that will be executed on the server side instead of anything else when the user is authenticated. The command supplied by the user (if any) is put in the environment variable `SSH2_ORIGINAL_COMMAND`. The command is run on a pty if the connection requests a pty; otherwise it is run without a tty. Quotes may be used in the command if escaped with backslashes.

This option might be useful for restricting certain public keys to perform just a specific operation. An example might be a key that permits remote backups but nothing else. Note that the client may specify TCP/IP and/or X11 forwarding, unless they are explicitly prohibited (see `no-port-forwarding`).

environment="NAME=value"

Specifies that the string is to be added to the environment when logging in using this key. Environment variables set this way override other default environment values. Multiple options of this type are permitted.

idle-timeout=time

Sets idle timeout limit to time either in seconds (s or nothing after the number), in minutes (m), in hours (h), in days (d), or in weeks (w). If the connection has been idle (all channels) this long, the connection is closed.

no-port-forwarding

Forbids TCP/IP forwarding when this key is used for authentication. Any port forward requests by the client will return an error. This is useful in combination with the `command` option.

no-agent-forwarding

Forbids authentication agent forwarding when this key is used for authentication.

no-pty

Prevents tty allocation (a request to allocate a pty will fail).

Example: Your authorization file could, for example, contain the following:

```
Key master.pub
Key maid.pub
Options allow-from=".*\example\.org"
Key butler.pub
Options deny-from=".*\evil\example",no-pty
```

When someone now logs in using the `master` key, the connection is not limited in any way by the `authorization` file. However, if the `maid` key is used, only connections from certain hosts will be allowed. And if the `butler` key is used, connections are denied from certain hosts, and additionally the allocation of tty is prevented.

5.6.3 Using Keys Generated with OpenSSH

If the user has an existing OpenSSH `authorized_keys` file on the server, the **ssh-keygen-g3** tool can be used to import the OpenSSH `authorized_keys` file and to configure the `authorization` file, for example:

```
SERVER> ssh-keygen-g3 --import-ssh1-authorized-key
$HOME/.ssh/authorized_keys $HOME/.ssh2/authorization

Imported key /home/user/.ssh/authorized_keys:1 to
/home/user/.ssh2/imported-437b1a07-1.pub and added to authorization file
/home/user/.ssh2/authorization
Imported key /home/user/.ssh/authorized_keys:2 to
/home/user/.ssh2/imported-437b1a07-2.pub and added to authorization file
/home/user/.ssh2/authorization
```

For more information on the **ssh-keygen-g3** options, see the *Tectia Server for IBM z/OS User Manual* or the **ssh-keygen-g3** man page.

Alternatively, the administrator of Tectia Server for IBM z/OS may enable **AuthorizedKeysFile** in the server configuration file `/opt/tectia/etc/sshd2_config`, for example as follows:

```
AuthorizedKeysFile %D/.ssh/authorized_keys
```

Tectia Server for IBM z/OS will check the defined **AuthorizedKeysFile** in addition to the user's **AuthorizationFile** (by default `$HOME/.ssh2/authorization`). Note that the **AuthorizationFile** has precedence over **AuthorizedKeysFile** if the same key is defined in both.

5.7 User Authentication with Certificates

Tectia Server for IBM z/OS includes two implementations of certificate authentication. One is based on keys and X.509 certificates in files and software cryptography. This is the same implementation that is available in Tectia products on other platforms. The other implementation is based on keys and certificates managed by the z/OS System Authorization Facility (SAF) and cryptographic operations handled by the z/OS Integrated Cryptographic Service Facility (ICSF).

For more information, see [Section 5.4](#).

The server can be configured to allow or require certificate-based user authentication. To use SAF certificates, a trusted key provider must be configured. The users must be set up with digital certificates.

When using a certificate, the client can start authentication without presenting a user name. If the user name given by the user matches the value of the `IdentityDispatchUsers` keyword in the server configuration, the name retrieved from SAF will be used. However, it is not allowed to change the user ID during the authentication process. For example, if the server requires first certificate authentication and then password authentication, the user must give the password for the user that SAF determines from the certificate.

SAF determines the z/OS user name using one-to-one certificate to user ID association, certificate name filtering, or the `HostIdMappings` certificate extension. Tectia Server for IBM z/OS does not participate in this processing.

The server checks the user certificate using SAF and can be configured to do a full PKI validation using the Tectia Certificate Validator.

5.7.1 Certificates Stored in File

To configure the server to allow user authentication with certificates, perform the following tasks:

1. Acquire the CA certificate and copy it to the server machine. You can either copy the X.509 certificate(s) as such or you can copy a PKCS #7 package including the CA certificate(s). Certificates can be extracted from a PKCS #7 package by specifying the `-7` option with `ssh-keygen-g3`.
2. Certificate authentication is a part of the `publickey` authentication method. Make sure that you have enabled it in the `/opt/tectia/etc/sshd2_config` file:

```
AllowedAuthentications      publickey
AuthPublicKey.Cert.Required  no
```

Setting the `AuthPublicKey.Cert.Required` option to `yes` defines that the user must authenticate with a certificate or else the authentication will fail.

3. Specify the trusted CA certificate and the mapping file(s) in the `ssh_certd_config` file:

```
Pki                  <ca-cert-path>
MapFile              <map-file-path>
```

You can define several CA certificates by using several `Pki` keywords.

<code>Pki</code>	<code>test-ca1.crt</code>
<code>MapFile</code>	<code>cert-user-mapping1.txt</code>
<code>Pki</code>	<code>test-ca2.crt</code>
<code>MapFile</code>	<code>cert-user-mapping2a.txt</code>
<code>MapFile</code>	<code>cert-user-mapping2b.txt</code>

Note that multiple `MapFile` keywords are permitted per `Pki` keyword. Also, if no mapping file is defined, all connections are denied even if user certificates can be verified using the defined CA certificate. The server will accept only certificates issued by defined CA(s).

4. Also define the LDAP server(s) used for CRL checks in the `ssh_certd_config` file. If the CA services (OCSP, CRLs) are located behind a firewall, define also the SOCKS server.

<code>LdapServers</code>	<code>ldap://ldap.example.com:389</code>
<code>SocksServer</code>	<code>socks://fw.example.com:1080</code>

Defining the LDAP server is not necessary if the CA certificate contains a `CRL Distribution Point` or an `Authority Info Access` extension.

5. Create the certificate user mapping file as described in [Section 5.7.2](#).
6. Restart `ssh-certd` as instructed in [Section 3.2.3](#).

For more information on the configuration file options, see [sshd2_config\(5\)](#) and [ssh_certd_config\(5\)](#).

5.7.2 Certificate User Mapping File

The map file specifies which certificates authorize logging into which accounts. The format of the file is as follows:

```
<account-id> <keyword> <argument>
```

The `keyword` can be either `Email`, `Subject`, `SerialAndIssuer`, `EmailRegex`, or `SubjectRegex`. The `argument` depends on the `keyword`.

- `Email`: The argument is the e-mail address which must be present in the certificate.
- `Subject`: The argument is the required subject name in LDAP DN (distinguished name) string format.
- `SerialAndIssuer`: The argument is the required serial number and issuer name in LDAP DN string format, separated by spaces or tabs.
- `EmailRegex`: The argument is the regular expression which must match an e-mail address in the certificate. If `account-id` contains the string `%subst%`, it is substituted with the first parenthesized part of the regular expression. The patterns are matched using the `egrep` syntax.

- **SubjectRegex:** The argument is the regular expression which must match a subject name in the certificate. If `account-id` contains the string `%subst%`, it is substituted with the first parenthesized part of the regular expression. The patterns are matched using the egrep syntax.

Examples

The following are examples of different map file definitions:

```
user1 email user1@ssh.com
user1 subject C=FI,O=SSH,CN=Secure Shell User 1
user1 serialandissuer 1234 C=FI,O=SSH,CN=Secure Shell User 1
%subst% subjectregex C=FI, O=SSH, CN=([a-z]+)
%subst% emailregex ([a-z]+)@ssh\..com
```

The last line permits logging with any e-mail address with only letters in the user name. For more information on the regular expression syntax, see [sshregex\(1\)](#).

5.7.3 Certificates Stored in SAF

To configure the server to allow user authentication with SAF certificates, perform the following tasks. Replace the names and IDs with those appropriate to your system:

1. Certificate authentication is a part of the `publickey` authentication method. Make sure that you have enabled it in the `/opt/tectia/etc/sshd2_config` file:

AllowedAuthentications	publickey
AuthPublicKey.Cert.Required	yes

Setting the `AuthPublicKey.Cert.Required` option to `yes` defines that the user must authenticate with a certificate or else the authentication will fail.

2. Define the certificate validation method in the `/opt/tectia/etc/sshd2_config` file. The validation method can be either `saf`, `tectia`, or both (`saf,tectia`).

AuthPublicKey.Cert.ValidationMethods	tectia saf saf,tectia
--------------------------------------	-----------------------

If `saf` is specified, RACF/SAF is used for validating user certificates. The user certificates must be found in a trusted key ring defined by the `AuthorizationEkProvider` keyword. Note that when only SAF validation is used, the certificate validity period and revocation status are not checked.

If `tectia` is specified (or the keyword is missing from the configuration), the Tectia Certificate Validator (`ssh-certd`) is used for validating the user certificate. The user certificates must be issued by a trusted certification authority defined in the `Pki` or `PkiEkProvider` keyword of `ssh_certd_config`.

If both values are specified, RACF/SAF determines the user name based on the certificate contents. After that the Tectia validation is performed. The CA certificate of the issuing certification authority must be found in a trusted key ring defined by the `PkiEkProvider` keyword of `ssh_certd_config`.



Note

Several of the following steps are marked either as *SAF validation*, *SAF validation only*, *Tectia validation*, or *Tectia validation only*. These steps are alternatives depending on the value of `AuthPublicKey.Cert.ValidationMethods`. If `saf,tectia` is selected, both the steps marked as *SAF validation* and *Tectia validation* need to be completed.

3. (*SAF validation only*) Get the user certificate and store it to a data set, for example 'USER.CRT'.
4. (*SAF validation only*) To add the user certificate into SAF, give the following TSO commands:

```
RACDCERT ID(USER) ADD('USER.CRT') TRUST WITHLABEL('USER')
RACDCERT ID(USER) ADDRING(USER)
RACDCERT ID(USER) CONNECT(ID(USER) LABEL('USER') RING(USER)
    USAGE(PERSONAL))
RACDCERT ID(USER) LISTSTRING(USER)
```

5. (*SAF validation only*) For the settings to take effect, give the following TSO command:

```
SETROPTS RACLIST(DIGTCERT) REFRESH
```

6. (*Tectia validation*) Get the CA certificate and store it to a data set, for example 'PKICA.CRT'.
7. (*Tectia validation*) To add the CA certificate into SAF, give the following TSO commands:

```
RACDCERT CERTAUTH ADD('PKICA.CRT') TRUST WITHLABEL('PKICA')
RACDCERT ID(SSHD2) ADDRING(SSH-PKI)
RACDCERT ID(SSHD2) CONNECT(CERTAUTH LABEL('PKICA') RING(SSH-PKI)
    USAGE(CERTAUTH))
RACDCERT ID(SSHD2) LISTSTRING(SSH-PKI)
```

8. (*Tectia validation*) For the settings to take effect, give the following TSO command:

```
SETROPTS RACLIST(DIGTCERT) REFRESH
```

9. (*SAF validation*) The `IdentityDispatchUsers` keyword in the `/opt/tectia/etc/sshd2_config` file can be used to define user name patterns for which the login name given by the user is not used but the real user name is taken from the user certificate.

<code>IdentityDispatchUsers</code>	<code>username-pattern</code>
------------------------------------	-------------------------------

10. (*SAF validation*) A user certificate might contain a **HostIdMapping** extension field. That field is used by SAF to determine the local user name of the user. If the user certificate has the correct host name in the **HostIdMapping** host name field, the user name associated with that host name (specified in the certificate) is used. To use the **HostIdMapping** extension in user certificates, give the CA certificate the **HIGHTRUST** status and give the `SSHD2` user **READ** access to the resource `IRR.HOST.hostname` in the

SERVAUTH class, where `hostname` is the character string used in the certificate extension. Often the DNS name of the server is used as the host name. To allow SAF to use the **HostIdMapping** extension, give the following commands:

```
RACDCERT CERTAUTH ALTER(LABEL('PKICA')) HIGHTRUST
RDEFINE SERVAUTH IRR HOST LPAR2 EXAMPLE COM UACC(NONE)
PERMIT IRR HOST LPAR2 EXAMPLE COM CLASS(SERVAUTH) ID(SSHD2) ACCESS(READ)
SETROPTS RACLIST(SERVAUTH) REFRESH
RLIST SERVAUTH IRR HOST LPAR2 EXAMPLE COM ALL
```

11. (*SAF and Tectia validation*) As an alternative to the previous step, when both SAF and Tectia validation are used, the **HostIdMappingHostnames** keyword in the `/opt/tectia/etc/sshd2_config` file can be used to define a list of host names that the server recognizes. If the user certificate has a matching host name in the **HostIdMapping** host name field, the user name associated with that host name (specified in the certificate) is used.

```
HostIdMappingHostnames          lpar2.example.com
```

12. (*SAF validation only*) If only SAF validation is used, define the z/OS SAF external key provider that contains the user certificates with the **AuthorizationEkProvider** keyword in the `/opt/tectia/etc/sshd2_config` file:

```
AuthorizationEkProvider        "zos-saf:KEYS( ID(%UU) RING(%UU) )"
```

The **AuthorizationEkProvider** keyword can contain special strings in the key specification that are mapped according to the following list:

- %U = user name
- %UU = user name in upper case
- %UL = user name in lower case
- %IU = user ID
- %IG = user group ID

13. (*Tectia validation*) If Tectia validation is used, define the z/OS SAF external key provider that contains the CA certificates with the **PkiEkProvider** keyword in the `ssh_certd_config` file:

```
PkiEkProvider                  "zos-saf:KEYS( ID(SSHD2) RING(SSH-PKI) )"
```

14. (*Tectia validation only*) If only Tectia validation is used, define also the mapping file(s) in the `ssh_certd_config` file:

```
PkiEkProvider                  "zos-saf:KEYS( ID(SSHD2) RING(SSH-PKI) )"
MapFile                         cert-user-mapping.txt
```

15. (*Tectia validation*) If Tectia validation is used, define also the LDAP server(s) used for CRL checks in the `ssh_certd_config` file. If the CA services (OCSP, CRLs) are located behind a firewall, define also the SOCKS server.

<code>LdapServers</code>	<code>ldap://ldap.example.com:389</code>
<code>SocksServer</code>	<code>socks://fw.example.com:1080</code>

Defining the LDAP server is not necessary if the CA certificate contains a `CRL Distribution Point` or an `Authority Info Access` extension.

16. (*Tectia validation only*) If only Tectia validation is used, create the certificate user mapping file as described in [Section 5.7.2](#).

17. (*Tectia validation*) Restart `ssh-certd` as instructed in [Section 3.2.3](#).

For more information on the configuration file options, see [sshd2_config\(5\)](#) and [ssh_certd_config\(5\)](#). For information on the format of the external key initialization string, see [ssh-externalkeys\(5\)](#).

5.8 User Authentication with Keyboard-Interactive

Keyboard-interactive is a generic authentication method that can be used to implement different types of authentication mechanisms. Any currently supported authentication method that requires only the user's input can be performed with keyboard-interactive.

Currently on Tectia Server for IBM z/OS, the supported submethods for keyboard-interactive are `password` and `plugin`.

Methods that require passing some binary information, such as public-key authentication, cannot be used as submethods of keyboard-interactive. But public-key authentication, for example, can be used as an additional method alongside keyboard-interactive authentication.



Note

The client cannot request any specific keyboard-interactive submethod if the server allows several optional submethods. The order in which the submethods are offered depends on the server configuration. However, if the server allows, for example, the two optional submethods SecurID and `password`, the user can skip SecurID by pressing enter when SecurID is offered by the server. The user will then be prompted for a password.

Keyboard-interactive is not enabled by default on Tectia Server for IBM z/OS. To set up keyboard-interactive authentication, do the following:

1. Include the following line in the `/opt/tectia/etc/sshd2_config` file:

<code>AllowedAuthentications</code>	<code>keyboard-interactive</code>
-------------------------------------	-----------------------------------

Also other authentication methods can be listed.

2. The submethods and policy for keyboard-interactive are configured as follows:

```
AuthKbdInt.Required      password
AuthKbdInt.Optional       password,plugin
AuthKbdInt.NumOptional     1
AuthKbdInt.FailureTimeout 2
...
```

The default number of optional submethods that must be passed is 0, although if no required submethods are specified, the client must always pass at least one optional submethod.

See [sshd2_config\(5\)](#) for more information on the keywords.

3. (*Optional*) You can configure password change for the `password` submethod with the two configuration variables described in [Section 5.5](#).
4. Restart the server as instructed in [Section 3.1.3](#).

Chapter 6 System Administration

Secure system administration using shell connection and remote commands is a common use case for Tectia Server for IBM z/OS.

You can limit the services that are accessible via Secure Shell with the server settings. For example, the Secure Shell server may deny terminal access and allow only file transfer or tunneling. The restrictions are described in [Section 4.9.1](#).

6.1 Shell Access and Remote Commands

Users can set up their USS shell environments to use a code page other than the default IBM-1047 code page. Tectia Server for IBM z/OS supports conversion of the terminal data stream to several code pages. There are two ways to specify the code page: the **chcp** command and server configuration.

Tectia Server also supports conversion of the line delimiter through server configuration. However, many SSH clients do line delimiter conversion or use LF, which is the Tectia default line delimiter.

The code page of the data on the line can also be specified. It must be the code page that the Secure Shell client uses or is configured to use. ISO8859-1 is the default code page.

6.1.1 Supporting the **chcp** Command

The **chcp** command can be used to dynamically change the code page in interactive terminal sessions. The default Tectia Server for IBM z/OS configuration supports this usage. The code page (and the locale) is typically set up in each user's `.profile` or `.tcseshrc` script (see the IBM book *z/OS USS User's Guide*).



Note

The `/etc/profile` and the user's `.profile` script must work in both the IBM-1047 code page and the user's code page. Several of the EBCDIC variant characters are significant in shell scripts.

The **chcp** command has code page names as its arguments. The code pages must be supported by **iconv**. The **chcp** command cannot specify a translation table file.

6.1.2 Configuring Terminal Data Conversion

The code pages or translation table for code page conversion and the line delimiters for EOL conversion can be specified in the server configuration files. For interactive sessions, the code pages are the initial values (they can be changed with the **chcp** command).

The configuration variables have defaults which are used if the variables are not specified in any configuration file. The values specified in `sshd2_config` override the defaults and can themselves be overridden by settings in host-specific or user-specific subconfiguration files. For more information, see [Section 4.2.2](#) and [Section 4.2.1](#).

Subconfiguration files are read in when a terminal session is started - they can be changed without restarting the server or the client connection.

The related configuration variables are:

`ShellAccountCodeset` defines the CCS expected by the shell and shell applications.

`ShellTransferCodeset` defines the coded character set (CCS) on the line.

`ShellAccountLineDelimiter` defines the line delimiter expected by the shell and shell applications.

`ShellTransferLineDelimiter` defines the line delimiter on the line.

`ShellConvert` defines whether conversions are to be done for shell access and remote command execution.

`ShellTranslateTable` defines the MVS translate table to be used from line to shell.

Chapter 7 File Transfer Using SFTP

This chapter contains instructions on secure file transfer (SFTP) settings with Tectia Server for IBM z/OS. For information on securing the server for file transfer use, see [Section 4.9.2](#).

7.1 Creating a User for Batch File Transfers

You can create users specifically for running Tectia Server for IBM z/OS file transfer batch jobs. Batch users need only an OMVS segment. They do not need TSO or passwords.

To create a user, for example `SFTUSER`, for running batch file transfers, do the following steps:

1. Create a user, for example using RACF:

```
ADDUSER SFTUSER NAME('SSH Tectia Batch User') OWNER(IBMUSER) +
NOPASSWORD NOOIDCARD +
OMVS(HOME('/u/SFTUSER') PROGRAM( /nologin ) UID(12345))
```

The home directory and UID must be unique for each user.

2. Enter the following commands:

```
# mkdir /u/SFTUSER          ①
# mkdir /u/SFTUSER/.ssh2    ②
# chown -R SFTUSER /u/SFTUSER ③
# chmod 700 /u/SFTUSER/.ssh2 ④
```

- ① Create the USS home directory `/u/SFTUSER` for the `SFTUSER` user.
- ② Under the home directory, create the `.ssh2` subdirectory for storing the remote server host keys (and optionally user keys and the user-specific `ssh-broker-config.xml` configuration file).
- ③ Make `SFTUSER` the owner of these directories.
- ④ Give only `SFTUSER` full (read, write and execute) permissions to the `.ssh2` subdirectory.



Note

If you use ACF2 for system security and have enabled the TSO Command Limiting list, the batch user must have `BPXWRTECM` permitted.

7.2 Controlling File Transfer

The current Secure Shell protocol and current clients do not transfer any information about the files to be transferred, only the file contents as a byte stream. This is sufficient for Unix-type files if the sender and receiver use the same coded character set (CCS).

Tectia Server for IBM z/OS needs more information: which transfer format to use, what coded character sets are involved, and what the file characteristics are. When Tectia is used at both ends, the information can be relayed by using the `site` commands of `scpg3` and `sftpg3`, or read from environment variables. When a third-party Secure Shell client is used together with Tectia Server for IBM z/OS, the information can be either encoded in the file name (advice string), read from a file transfer profile, or read from environment variables.

For more information, see *Tectia Server for IBM z/OS User Manual*



Note

For information related to dataset access, see section *Data Set and HFS File System Access* in *Tectia Server for IBM z/OS User Manual*

7.2.1 Handling Prematurely Ending File Transfers

By default, when a file transfer to Tectia Server for IBM z/OS ends prematurely, the allocated data set is kept.

To change this behavior, you can specify the `--attribute=condisp` option with `sft-server-g3` in the `sshd2_config` file:

```
subsystem-sftp    /opt/tectia/libexec/sft-server-g3 --attribute=condisp:DELETE
```

The `condisp` option can take values `CATLG`, `UNCATLG`, `KEEP`, and `DELETE`, and they have the following effects, depending on the file type (MVS or HFS):

- `CATLG` (default): an MVS data set is retained and its name is cataloged. An HFS file is retained.
- `UNCATLG`: the name of an MVS data set is removed from the catalog but the data set is retained. An HFS file is retained.
- `KEEP`: an MVS data set is retained (if cataloged it will be still cataloged, if uncataloged it will be still uncataloged). An HFS file is retained.

- **DELETE**: the name of an MVS data set is removed from the catalog and the space allocated for the data set is released. An HFS file is deleted.

7.2.2 Controlling Staging during File Transfers

It is possible to change staging behavior in Tectia server on z/OS. You can specify the `--attribute=staging` option with **sft-server-g3** in the `sshd2_config` file:

```
subsystem-sftp    /opt/tectia/libexec/sft-server-g3 --attribute=staging:YES
```

When `staging` is set to `NO` (default), staging is not used if not explicitly requested by the client.

When `staging` is set to `YES`, staging is used when needed.

Third-party file transfer clients can request staging with the following file transfer advice string:

```
/ftadv:staging=yes/
```

or in short:

```
/ftadv:s=yes/
```

If the file transfer client uses SFTP protocol for transferring the file and accesses the file or data set in correct order, staging is not needed. However, if the client accesses file data in random offsets, staging is necessary when data sets are involved or conversions are used.

7.2.3 Restoring Archived Data Sets

Storage management software, such as data facility hierarchical storage manager (DFHSM), can migrate needless data sets by storing them out of the normal data file system to a tape or some other storage medium. These data sets are listed in the catalog with a special volume serial number, normally `MIGRAT`, but some configurations or products may use different identifiers. A migrated data set is recalled by mounting the offline storage medium on which it is stored and copying it back to an online medium. This process can happen automatically under the storage manager's control, or it may be explicitly requested. There will usually be some delay while recall occurs.

From an SFTP user point of view, it may be desirable to have migrated data sets automatically recalled, or it may be preferred not to do so and ignore them if they would be selected by a globbing pattern. This behavior can be controlled via the `automount` and `autorecall` extended file attributes. See *Tectia Server for IBM z/OS User Manual* for further details.

When allocating a migrated data set, the SFTP subsystem recognizes that the volume serial number `MIGRAT` is purely symbolic and does not use it to specify the volume, allowing the storage manager to do so. In the case where the special volume serial number for a migrated data set is other than `MIGRAT`, it is necessary to inform the SFTP subsystem that this is the case. The environment variable `SSH_SFT_PSEUDOVOLUME_VOLSER` is provided for this purpose. It may be set to a comma-separated list of one or more pseudo-volume serial

numbers, each of which is a string. If the volume serial number of a migrated data set matches one of these, the subsystem will treat the data set exactly as if it had contained `MIGRAT`, that is, it will not specify a volume when attempting to allocate the data set. Note that this is the sole effect of this environment variable: it does not cause migration or recall to happen, or modify the process in any other way. Supply the setting `SSH_SFT_PSEUDOVOLUME_VOLSERS=<volser_list>` (where `<volser_list>` is a comma-separated list of pseudo-volume serial numbers) as appropriate in any of `/etc/environment`, the user's logon profile or `rc` script, `~/.ssh2/environment`, or the data set allocated to `STDENV DD` for a batch job.

For recall of migrated data sets to happen when they are requested via SFTP, the following conditions are required:

- The user ID under which SFTP is running must be permitted to recall migrated data sets. If the RACF facility `SSZ.MOUNT` is defined, the user must have read access.
- The extended file attribute `automount` must be set to `yes` or `imed` via `site` command or configuration.
- The `autorecall` extended file attribute must be set or allowed to default to `yes`.

To avoid unintentionally recalling data sets when it is not desired to do so, set the extended file attribute `autorecall` to `no`. If the special volume serial number for migrated data sets is anything other than `MIGRAT`, define the special volume serial number(s) in use via the `SSH_SFT_PSEUDOVOLUME_VOLSERS` environment variable.

Chapter 8 SSZASST Client Jobs Generator

The Tectia ISPF Assistant (SSZASST) provides a facility to generate file-transfer client jobs, via main menu option 8 CJOB.

```
SSZ USERX          Secure Shell Assistant          2025/07/31 12:49
Option ===> 8

0  SETM      Installation settings and defaults submenu
1  GENJ      Generate installation jobs
2  INST      Perform the step-by-step installation
3  CONF      Manage configuration files
4  TASK      Start/stop/modify started tasks
5  UTIL      Utility jobs to manage the installation
6  MANP      Browse the manual pages directory
7  STAT      Show status information about the installation
8  CJOB      Generate client jobs for file transfer, etc.
```

The output is a collection of customized JCL batch jobs, ready to run or to edit further, which perform a selection of common transfer operations on datasets and files.

The general structure of this facility is similar to that used by SSZASST for Tectia installation: define settings, generate jobs, edit/run them from an ISPF member list.

```
SSZ USERX          Client Jobs Submenu          2025/07/31 12:51
Option ===> 0

0  SETG      Define client jobs settings
1  GENJ      Generate client jobs
2  JOBS      Member-list of generated client jobs
```

Start with option 0 SETG to enter settings for the generation of client jobs. When settings have been established as desired, proceed to option 1 GENJ to generate the jobs, and then to option 2 JOBS to enter a member selection list where jobs may be edited and submitted. One may return to adjust settings and generate jobs anew as wished, including creating separate libraries of jobs differentiated by type such as BPXBATxx mode versus direct execution from PDSE.

8.1 Client JOBS Settings

The SSH client settings panel allows the setting of options to customize the generation of file-transfer client jobs. These settings are saved in the user profile and may be revised in this panel to adjust the client jobs.

Basic required input consists of the default JOB cards which will head each job, and the name of the PDSE which will hold generated job JCL. This PDSE will be created at job generation time if it does not exist.

```
SSZ USERX           Define Client Jobs Settings      2025Enter Y or N
Command ===>

Enter the settings to use for customizing client jobs.

Default jobcards for client jobs:
//      JOB ,,CLASS=A,MSGCLASS=X,MSGLEVEL=(1,1),
//      NOTIFY=&SYSUID

Client tailored batch jobs output dataset details:
DSName    ===> 'USERX.SSZ.CLIENT.BPX.CNTL'

Allow direct exec: N      Set up authorized PDSE: N

Client PDSE for direct execution of client binaries:
DSName    ===>

Client PDSE for authorized client binaries:
DSName    ===> 'USERX.SSZ.CLIENT.AUTHLOAD'

Volser    ===>          Unit ===>          Storclas ===>
```

The choice is provided to create jobs using the BPXBATxx utilities or executing directly from a PDSE object module library. The latter option works better with authorized programs such as ADRDSSU invoked from Tectia.

```
SSZ USERX           Define Client Jobs Settings      2025/07/31 12:51
Command ===>

Enter the settings to use for customizing client jobs.

Default jobcards for client jobs:
//      JOB ,,CLASS=A,MSGCLASS=X,MSGLEVEL=(1,1),
//      NOTIFY=&SYSUID

Client tailored batch jobs output dataset details:
DSName    ===> 'USERX.SSZ.CLIENT.CNTL'

Allow direct exec: Y      Set up authorized PDSE: Y
```

```

Client PDSE for direct execution of client binaries:
DSName      ===> 'USERX.SSZ.CLIENT.LOAD'

Client PDSE for authorized client binaries:
DSName      ===> 'USERX.SSZ.CLIENT.AUTHLOAD'

Volser      ===> GDLR01      Unit ===>           Storclas ===>

```

Jobs to set up the PDSE executable library and the authorized library will be generated if the 'Allow direct exec' and optionally 'Set up authorized PDSE' choices are selected. The names of the PDSEs become required as selected. One may also provide volume serial and unit, or SMS storage-class, to adjust their allocation jobs. In order to set up the authorized PDSE, the volser is required.

Other scenarios, such as copying APF-authorized Tectia executables to an existing authorized PDSE, may be handled by editing the generated jobs as required.

8.2 Generate Client Jobs

The Generate Client Jobs menu, accessed via option 8.1 GENJ, provides selection options to generate client jobs, either in groups or all at once (option 99).

```

SSZ USERX          Generate Client Jobs      2025/07/31 12:51
Option ===> 99

0 SETUP            Set-up jobs for direct execution, broker, etc.

1 SEQDS            Client jobs for sequential datasets, flat files
2 APPEND           Client jobs for appending
3 AFFIX            Client jobs for affixed copy
4 VSAM             Client jobs for vsam datasets
5 JES              Client jobs for job submission, jes spool access
6 IDCAMS           Client jobs for idcams
7 PDS              Client jobs for pds access
8 IEBCOPY          Client jobs for iebcopy
9 ADRDSSU          Client jobs for adrdsu
10 SORT             Client jobs for sort
11 PIPE             Client jobs for named pipes
12 BATCHP           Client jobs for batch pipes

99 GENALL          Generate all jobs ( Edit: N )

```

The options presented and the jobs generated depend on choices made in the Settings panel. For instance if it is chosen to use BPXBATxx mode of execution, the jobs to set up a PDSE object module library are not needed, and so are not generated.

The generated jobs will be stored in the JCL library indicated in the Settings panel.

The simplest way to use this menu is to choose option 99 with Edit No, which will generate all jobs without intervention. A pop-up panel displays the names of the jobs as they are produced.

If more control is desired, jobs may be requested by groups according to the menu options 0 to 12, with Edit Yes selected, in which case each job in the group will be presented successively under ISPF Edit, where they may be modified before continuing.

Positioning the cursor on the job group name and pressing help (PF1) will bring up a short explanation of what the group means.

8.3 Member-list of Generated Client Jobs

The Generated Client Jobs member-list is an ISPF member-list of the PDSE JCL library specified in Settings. The members can be viewed (Enter), edited (E), or submitted (SUB), by entering the appropriate command in the line-command area next to the member name. Submit can also be done from the member view or edit panel.

MEMBER LIST USERX.SSZ.CLIENT.BPX.CNTL						Row 0000001 of 0000031
						Scroll ==> CSR
Name	Prompt	Size	Created	Changed	ID	
..... @INDEX		32	2025/07/31	2025/07/31 13:58:23	USERX	
..... C005BRKR		12	2025/07/31	2025/07/31 13:57:51	USERX	
..... C011FS1Q		23	2025/07/31	2025/07/31 13:57:52	USERX	
..... C012FS2Q		27	2025/07/31	2025/07/31 13:57:53	USERX	
..... C013FS3Q		21	2025/07/31	2025/07/31 13:57:54	USERX	
..... C014FS4Q		19	2025/07/31	2025/07/31 13:57:55	USERX	
..... C021FA1P		19	2025/07/31	2025/07/31 13:57:56	USERX	
..... C022FA2P		20	2025/07/31	2025/07/31 13:57:57	USERX	
..... C023FA3P		21	2025/07/31	2025/07/31 13:57:58	USERX	
..... C024CA4P		30	2025/07/31	2025/07/31 13:58:00	USERX	
..... C031FS1X		18	2025/07/31	2025/07/31 13:58:01	USERX	
..... C032CP2X		18	2025/07/31	2025/07/31 13:58:02	USERX	
..... C041FV1S		27	2025/07/31	2025/07/31 13:58:03	USERX	
..... C042FV2S		20	2025/07/31	2025/07/31 13:58:04	USERX	
..... C051FJ1S		28	2025/07/31	2025/07/31 13:58:05	USERX	
..... C052FJ2S		28	2025/07/31	2025/07/31 13:58:06	USERX	
..... C061FIDC		134	2025/07/31	2025/07/31 13:58:07	USERX	
..... C071FP1D		18	2025/07/31	2025/07/31 13:58:08	USERX	
..... C072FP2D		25	2025/07/31	2025/07/31 13:58:09	USERX	
..... C073FP3D		26	2025/07/31	2025/07/31 13:58:10	USERX	
..... C074FP4D		21	2025/07/31	2025/07/31 13:58:11	USERX	
..... C081FI1B		20	2025/07/31	2025/07/31 13:58:12	USERX	
..... C082FI2B		26	2025/07/31	2025/07/31 13:58:13	USERX	
..... C091CWTO		31	2025/07/31	2025/07/31 13:58:15	USERX	
..... C093CX1F		61	2025/07/31	2025/07/31 13:58:16	USERX	
..... C101FSOR		30	2025/07/31	2025/07/31 13:58:17	USERX	

..... C111FP1P	17	2025/07/31	2025/07/31 13:58:18	USERX
..... C112CP2P	23	2025/07/31	2025/07/31 13:58:19	USERX
..... C121FB1P	23	2025/07/31	2025/07/31 13:58:20	USERX
..... C122FB2P	25	2025/07/31	2025/07/31 13:58:21	USERX
..... C123FB3P	31	2025/07/31	2025/07/31 13:58:22	USERX
End				

An index of the generated jobs is created in member @INDEX, in which the jobs are presented in recommended run order to satisfy dependencies produced in previous steps, as well providing a one-line description of each job.

```

VIEW      USERX.SSZ.CLIENT.BPX.CNTL(@INDEX) - 01.00      Columns 00001 00072
Command ===>                                         Scroll ==> CSR
***** ***** Top of Data *****
000001 Index of generated Tectia client jobs, in dependency order.
000002
000003 C005BRKR run broker, if daemon mode preferred
000004 C061FIDC sftp idcams: define and load ksds, idcams cmds dd *
000005 C041FV1S sftp seq: copy ksds to output ds fb, local via ddnames
000006 C042FV2S sftp seq: copy ksds via ddname to output ds fb
000007 C101FSOR sftp sort: input ksds, sort cmds dd *, output vb ds
000008 C011FS1Q sftp seq: copy ds via ddname to ds 'prefix'
000009 C012FS2Q sftp seq: copy fb ds to vb ds, via ddnames
000010 C071FP1D sftp pds: copy pds via ddname to hfs dir, with user data
000011 C072FP2D sftp pds: copy hfs dir, with user data, to pds via ddname
000012 C073FP3D sftp pds: copy pds to pds, local via ddnames
000013 C074FP4D sftp pds: copy pds to new remote pds
000014 C111FP1P sftp pipe: copy vb ds via ddname to output named pipe
000015 C112CP2P scp pipe: copy named pipe through sed filter to output ds
000016 C013FS3Q sftp seq: copy vb ds to hfs file, via ddnames
000017 C014FS4Q sftp seq: copy ds via ddname to remote ds by name
000018 C051FJ1S sftp jes: submit instream data jobcards to jes internal reader
000019 C052FJ2S sftp jes: fetch jes spool file(s) to sysout, also ls and rm
000020 C091CWTO scp dss: send wto cmd to adrdssu
000021 C093CX1F scp dss: dump datasets, restore them elsewhere, local/remote
000022 C081FI1B sftp iebcopy: copy pdse loadlib to pdse loadlib
000023 C082FI2B sftp iebcopy: copy pdse loadlib to pdse loadlib, via ddnames
000024 C121FB1P sftp batchpipe: put local fb ds via ddname to output batchpipe
000025 C122FB2P sftp batchpipe: put local batchpipe via ddname to fb ds
000026 C123FB3P sftp batchpipe: get remote batchpipe to fb ds via ddname
000027 C021FA1P sftp append: append pds members to seq ds
000028 C022FA2P sftp append: append members of pds via ddname to seq ds
000029 C023FA3P sftp append: append members of dir via ddname to seq ds
000030 C024CA4P scp append: append members of dir via ddname to seq ds
000031 C031FS1X sftp suffix: copy ds to ds, using temp suffix while writing
000032 C032CP2X scp prefix: copy ds to ds, using temp prefix while writing
***** ***** Bottom of Data *****

```

The previous screen-shots showed generated jobs for BPXBATxx mode; the following show the first screen of generated direct-exec mode jobs.

MEMBER LIST USERX.SSZ.CLIENT.CNTL						Row 0000001 of 0000040
						Scroll ==> CSR
Name	Prompt	Size	Created	Changed	ID	
..... @INDEX		40	2025/07/31	2025/07/31 12:52:14	USERX	
..... C001PDXA		60	2025/07/31	2025/07/31 12:51:34	USERX	
..... C002PDYA		21	2025/07/31	2025/07/31 12:51:35	USERX	
..... C003PDAU		62	2025/07/31	2025/07/31 12:51:36	USERX	
..... C004RLNK		28	2025/07/31	2025/07/31 12:51:37	USERX	
..... C005BRKR		20	2025/07/31	2025/07/31 12:51:38	USERX	
..... C011FS1Q		27	2025/07/31	2025/07/31 12:51:39	USERX	
..... C012FS2Q		31	2025/07/31	2025/07/31 12:51:40	USERX	
..... C013FS3Q		25	2025/07/31	2025/07/31 12:51:41	USERX	
..... C014FS4Q		23	2025/07/31	2025/07/31 12:51:42	USERX	
..... C021FA1P		23	2025/07/31	2025/07/31 12:51:43	USERX	
..... C022FA2P		24	2025/07/31	2025/07/31 12:51:44	USERX	
..... C023FA3P		25	2025/07/31	2025/07/31 12:51:45	USERX	
..... C024CA4P		40	2025/07/31	2025/07/31 12:51:46	USERX	
..... C031FS1X		22	2025/07/31	2025/07/31 12:51:47	USERX	
..... C032CP2X		23	2025/07/31	2025/07/31 12:51:49	USERX	
..... C041FV1S		31	2025/07/31	2025/07/31 12:51:50	USERX	
..... C042FV2S		24	2025/07/31	2025/07/31 12:51:51	USERX	
..... C051FJ1S		32	2025/07/31	2025/07/31 12:51:52	USERX	
..... C052FJ2S		32	2025/07/31	2025/07/31 12:51:53	USERX	
..... C061FIDC		138	2025/07/31	2025/07/31 12:51:54	USERX	
..... C071FP1D		22	2025/07/31	2025/07/31 12:51:55	USERX	
..... C072FP2D		29	2025/07/31	2025/07/31 12:51:56	USERX	
..... C073FP3D		30	2025/07/31	2025/07/31 12:51:57	USERX	
..... C074FP4D		25	2025/07/31	2025/07/31 12:51:58	USERX	
..... C081FI1B		24	2025/07/31	2025/07/31 12:52:00	USERX	
..... C082FI2B		30	2025/07/31	2025/07/31 12:52:01	USERX	
..... C091CWTO		41	2025/07/31	2025/07/31 12:52:02	USERX	
..... C092FWTO		26	2025/07/31	2025/07/31 12:52:04	USERX	
..... C093CX1F		76	2025/07/31	2025/07/31 12:52:03	USERX	
..... C094CX2F		47	2025/07/31	2025/07/31 12:52:05	USERX	
..... C095FX1F		48	2025/07/31	2025/07/31 12:52:06	USERX	
..... C096FX2F		43	2025/07/31	2025/07/31 12:52:08	USERX	
..... C101FSOR		34	2025/07/31	2025/07/31 12:52:09	USERX	
..... C111FP1P		21	2025/07/31	2025/07/31 12:52:10	USERX	
..... C112CP2P		23	2025/07/31	2025/07/31 12:52:11	USERX	
..... C121FB1P		27	2025/07/31	2025/07/31 12:52:12	USERX	
..... C122FB2P		29	2025/07/31	2025/07/31 12:52:13	USERX	

VIEW USERX.SSZ.CLIENT.CNTL(@INDEX) - 01.00			Columns 00001 00072
Command ==>			Scroll ==> CSR
***** ***** Top of Data *****			

```

000001 Index of generated Tectia client jobs, in dependency order.
000002
000003 C001PDXA sftp idcams: define pdse, copy tectia bin executables to it
000004 C002PDY4 sftp seq: try running sftpg3 from pdse
000005 C003PDAU sftp auth: define pdse, authorize it
000006 C004RLNK relink hfs executables to pdse load modules, auth
000007 C005BRKR run broker, if daemon mode preferred
000008 C061FIDC sftp idcams: define and load ksds, idcams cmds dd *
000009 C041FV1S sftp seq: copy ksds to output ds fb, local via ddnames
000010 C042FV2S sftp seq: copy ksds via ddname to output ds fb
000011 C101FSOR sftp sort: input ksds, sort cmds dd *, output vb ds
000012 C011FS1Q sftp seq: copy ds via ddname to ds 'prefix'
000013 C012FS2Q sftp seq: copy fb ds to vb ds, via ddnames
000014 C071FP1D sftp pds: copy pds via ddname to hfs dir, with user data
000015 C072FP2D sftp pds: copy hfs dir, with user data, to pds via ddname
000016 C073FP3D sftp pds: copy pds to pds, local via ddnames
000017 C074FP4D sftp pds: copy pds to new remote pds
000018 C111FP1P sftp pipe: copy vb ds via ddname to output named pipe
000019 C112CP2P scp pipe: copy named pipe through sed filter to output ds
000020 C013FS3Q sftp seq: copy vb ds to hfs file, via ddnames
000021 C014FS4Q sftp seq: copy ds via ddname to remote ds by name
000022 C051FJ1S sftp jes: submit instream data jobcards to jes internal reader
000023 C052FJ2S sftp jes: fetch jes spool file(s) to sysout, also ls and rm
000024 C091CWTO scp dss: send wto cmd to adrdssu
000025 C093CX1F scp dss: dump datasets, restore them elsewhere, local/remote
000026 C094CX2F scp dss: dump datasets, restore them elsewhere, no bpxbatch
000027 C081FI1B sftp iebcopy: copy pdse loadlib to pdse loadlib
000028 C082FI2B sftp iebcopy: copy pdse loadlib to pdse loadlib, via ddnames
000029 C121FB1P sftp batchpipe: put local fb ds via ddname to output batchpipe
000030 C122FB2P sftp batchpipe: put local batchpipe via ddname to fb ds
000031 C123FB3P sftp batchpipe: get remote batchpipe to fb ds via ddname
000032 C021FA1P sftp append: append pds members to seq ds
000033 C022FA2P sftp append: append members of pds via ddname to seq ds
000034 C023FA3P sftp append: append members of dir via ddname to seq ds
000035 C024CA4P scp append: append members of dir via ddname to seq ds
000036 C092FWTO sftp dss: send wto cmd to adrdssu
000037 C095FX1F sftp dss: dump datasets, restore them elsewhere, no bpxbatch
000038 C096FX2F sftp dss: dump dataset, restore it elsewhere, no bpxbatch

```

It will be seen that there are more initial set-up jobs for direct-exec mode, which handle the creation and loading of the required PDSE libraries. Here is the beginning of the PDSE object module library create and load job:

```

VIEW      USERX.SSZ.CLIENT.CNTL(C001PDXA) - 01.00      Columns 00001 00072
Command ===>                                         Scroll ===> CSR
***** ***** Top of Data *****
000001 //USERXPDX JOB , ,CLASS=A,MSGCLASS=X,MSGLEVEL=(1,1),
000002 //          NOTIFY=&SYSUID
000003 //*

```

```

000004 //      JCLLIB ORDER=USERX.SSZ.CLIENT.CNTL
000005 /**
000006 /* Sftp IDCAMS: define PDSE
000007 /**
000008 //IDCDEF  EXEC PGM=BPXBATSL,REGION=0M
000009 //STDPARM  DD  *
000010 PGM /opt/tectia/bin/sftpg3
000011 -B //DD:STDIN
000012 //STDENV    DD  DSN=SSZ.V676.PARMLIB(SSHENV),DISP=SHR
000013 //STDOUT    DD  SYSOUT=*
000014 //STDIN     DD  *,SYMBOLS=JCLONLY
000015 open -l
000016 sput //DD:IDCIN /ftadv:filetype=idcams/
000017 //IDCIN     DD  *
000018 DELETE -
000019 USERX.SSZ.CLIENT.LOAD -
000020 NONVSAM
000021 SET MAXCC = 0
000022 ALLOC -
000023 DSNAME('USERX.SSZ.CLIENT.LOAD') -
000024 NEW CATALOG -
000025 DSNTYPE(LIBRARY) -
000026 SPACE(100,100) CYLINDERS -
000027 RECFM(U) -
000028 DSORG(PO) -
000029 BLKSIZE(32760)
000030 /*
000031 /**
000032 /* Copy Tectia bin executables to PDSE
000033 /**
000034 // IF RC = 0 THEN
000035 //SFTP    EXEC PROC=REBIND,TRG=USERX.SSZ.CLIENT.LOAD
000036 //SYSIN   DD  *
000037 ENTRY CEESTART
000038 INCLUDE '/opt/tectia/bin/sftpg3'
000039 NAME SCPG3(R)
000040 /*
000041 // ENDIF

```

This job demonstrates running Tectia sftpg3 directly from the executable PDSE:

```

VIEW      USERX.SSZ.CLIENT.CNTL(C002PDY) - 01.00      Columns 00001 00072
Command ===>                                         Scroll ===> CSR
***** ***** Top of Data *****
000001 //USERXPDY JOB ,CLASS=A,MSGCLASS=X,MSGLEVEL=(1,1),
000002 //          NOTIFY=&SYSUID
000003 /**
000004 /* SFTP seq: try running sftpg3 from pdse
000005 /**
000006 //SFTPX   EXEC PGM=SFTPG3,PARMDD=STDPARM

```

```

000007 //STEPLIB DD DSN=USERX.SSZ.CLIENT.LOAD,DISP=SHR
000008 // DD DSN=CEE.SCEERUN,DISP=SHR
000009 //SYSPRINT DD SYSOUT=*
000010 //SYSOUT DD SYSOUT=*
000011 //CEEDUMP DD SYSOUT=*
000012 //STDENV DD DSN=SSZ.V676.PARMLIB(SSHENV),DISP=SHR
000013 //STDPPARM DD *
000014 POSIX(ON) ENVAR( "_CEE_ENVFILE_S=DD:STDENV" ) /
000015 -B //DD:STDIN 2>&1
000016 //STDIN DD *,SYMBOLS=JCLONLY
000017 open -l
000018 ls -l
000019 quit
000020 /*
000021 //
***** ***** Bottom of Data *****

```

The broker can be started in a variety of ways: dynamically when a client program is invoked, prestarted from the USS command-line, as a BPXBATxx job and as a directly exec'd program from a PDSE object module library. Here is the generated job to perform the last:

```

VIEW      USERX.SSZ.CLIENT.CNTL(C005BRKR) - 01.00      Columns 00001 00072
Command ===>                                         Scroll ===> CSR
***** ***** Top of Data *****
000001 //USERXBRK JOB ,CLASS=A,MSGCLASS=X,MSGLEVEL=(1,1),
000002 //          NOTIFY=&SYSUID
000003 /**
000004 /** broker: run in daemon mode
000005 /**
000006 //BRKR      EXEC PGM=SSHBRKG3,PARMDD=STDPPARM
000007 //STEPLIB  DD DSN=USERX.SSZ.CLIENT.LOAD,DISP=SHR
000008 //          DD DSN=CEE.SCEERUN,DISP=SHR
000009 //SYSPRINT DD SYSOUT=*
000010 //SYSOUT  DD SYSOUT=*
000011 //CEEDUMP DD SYSOUT=*
000012 //STDENV  DD DSN=SSZ.V676.PARMLIB(SSHENV),DISP=SHR
000013 //          DD *
000014 SSH_SECSH_AUXDATA_DIR=/opt/tectia/etc/ssh-tectia/auxdata/
000015 SSH_SECSH_PLUGIN_DIR=/opt/tectia/lib/sshsecsh/base
000016 //STDIN   DD DUMMY
000017 //STDPPARM DD *,SYMBOLS=JCLONLY
000018 POSIX(ON) ENVAR( "_CEE_ENVFILE_S=DD:STDENV" ) /
000019 2>&1
000020 //
***** ***** Bottom of Data *****

```

The remaining generated jobs are available for examination and use in generated form in the JCL library, so it would be redundant to show them all here. They can be used as-is or serve as the starting point for further adaptations.

Chapter 9 Secure File Transfer Using Transparent FTP Security

In addition to secure file transfer with SFTP command-line clients, Tectia Server for IBM z/OS provides ways to secure existing FTP file transfers transparently. These are transparent FTP tunneling and FTP-SFTP conversion.

Even though settings related to transparent FTP security are made at the FTP client side, they usually require administrator privileges.

9.1 Introduction to Transparent FTP Security

Transparent FTP tunneling and FTP-SFTP conversion can be used to secure both interactive and unattended FTP sessions. They provide a quick and easy way to secure FTP file transfers without the need to change existing FTP jobs or scripts.

Note that it is not possible to do transparent FTP tunnels or FTP-SFTP conversion specifying IPv6 addresses.

9.1.1 Transparent FTP Tunneling

Transparent FTP tunneling is implemented using the Tectia SOCKS Proxy component. Tectia SOCKS Proxy acts as a SOCKS proxy for the FTP client application on the Tectia Server for IBM z/OS host and captures FTP connections based on filter rules. The tunneling is transparent to the user and to the FTP application. The only change needed in the FTP application is to change the SOCKS proxy setting to point to a localhost listener.

The SOCKS Proxy uses the host name, user name, and password information provided by the FTP client application to open an authenticated and encrypted tunnel to a Secure Shell server.

The Secure Shell server can also be defined in the filter rules. In this case, the secure tunnel is terminated at the Secure Shell server and from there the FTP connection is forwarded to the FTP server unsecured.

The principle of transparent FTP tunneling is shown in [Figure 9.1](#). Before starting the tunneling, the Tectia SOCKS Proxy must be running and listening to the SOCKS port 1080 on the File Transfer Client host.

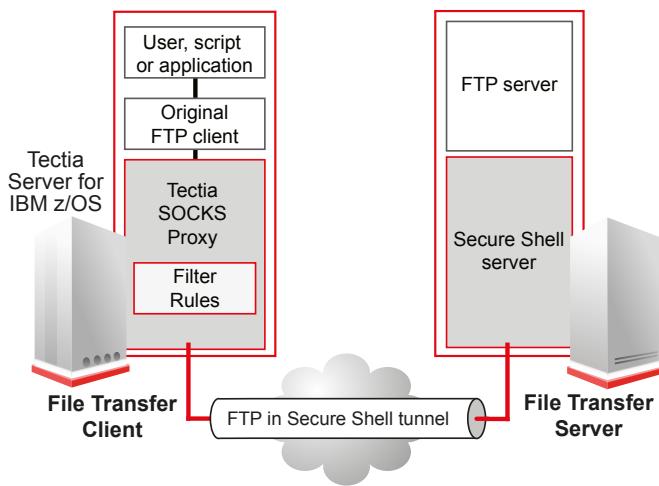


Figure 9.1. Transparent FTP tunneling

The following steps happen in transparent FTP tunneling:

1. An application, a script, or a user triggers a file transfer.
2. The FTP client in the File Transfer Client machine starts a file transfer to the FTP server in File Transfer Server.
3. The FTP client makes a SOCKS query. The SOCKS setting in the FTP client is set to point to the localhost Tectia SOCKS Proxy instead of a real firewall.
4. The filter rules that specify which connections to capture are defined in the SOCKS Proxy configuration. Connections can be captured based on the destination address and/or port.
5. The SOCKS Proxy module creates an authenticated and encrypted Secure Shell tunnel to a Secure Shell server. The user can be authenticated with the FTP user name and password, or with public keys. The Secure Shell server can be the FTP server specified in the original FTP request, or another server can be configured in the filter rules.
6. The secure tunnel is terminated at the Secure Shell server.
7. The Secure Shell server forwards the connection to the FTP Server, and the FTP server can continue with post-processing of the transferred files. If the FTP server is located on a third host, the connection from the Secure Shell server to the FTP server will be unsecured. This is why it is recommended that there is at least one Secure Shell server in each physically secured area, for instance, in a machine room.

9.1.2 FTP-SFTP Conversion

FTP-SFTP conversion is implemented using the Tectia SOCKS Proxy component. Tectia SOCKS Proxy acts as a SOCKS proxy for the FTP client application on the Tectia Server for IBM z/OS host and captures FTP connections based on filter rules. FTP connections are converted to SFTP, transparently to the user and to the FTP application. The only change needed in the FTP application is to change the SOCKS proxy setting to point to a localhost listener.

The SOCKS Proxy uses the host name, user name, and password information provided by the FTP client application to open an authenticated and encrypted SFTP connection to a Secure Shell SFTP server.

The Secure Shell SFTP server can also be defined in the filter rules. This way, the client's request for the FTP server destination can be overridden.

The principle of FTP-SFTP conversion is shown in [Figure 9.2](#). Before starting the conversion, the Tectia SOCKS Proxy must be running and listening on the SOCKS port 1080 on the File Transfer Client host.

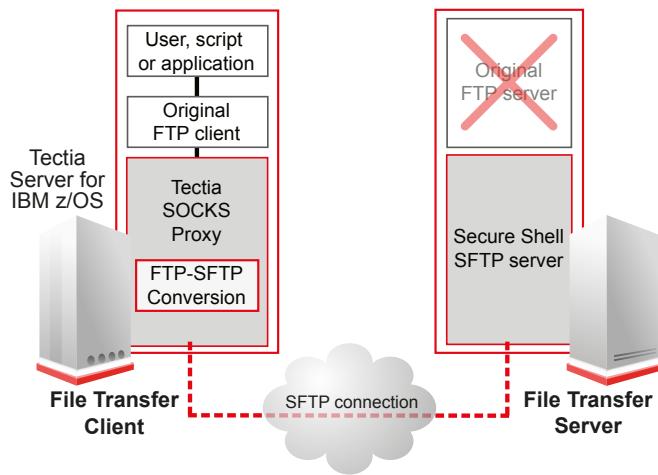


Figure 9.2. The architecture of FTP-SFTP conversion

The following steps happen during the FTP-SFTP conversion:

1. An application, a script, or a user triggers a file transfer.
2. The original FTP client in the File Transfer Client host starts opening a file transfer connection to the original destination FTP server (in File Transfer Server).
3. The FTP client makes a SOCKS query. The SOCKS setting in the FTP client is set to point to the localhost Tectia SOCKS Proxy instead of a real firewall.
4. The filter rules that specify which connections to capture are defined in the SOCKS Proxy configuration. Connections can be captured based on the destination address and/or port.

5. The FTP-SFTP conversion module can extract the user name, password, and the destination host name from the secured FTP application, and use them for authentication and connection setup with the Secure Shell SFTP server.
6. The FTP-SFTP conversion module manages the FTP connection so that it remains unchanged from the original FTP client's point of view. FTP is converted to secure SFTP file transfer.
7. The SFTP connection is managed by the Connection Broker module.
8. The Secure Shell SFTP server in the File Transfer Server host is the end point of the file transfer.

The unsecured original FTP server program can be eliminated from the server host.

9.1.3 Summary of Configuration Steps

To enable transparent FTP tunneling and FTP-SFTP conversion, you need to complete the following tasks:

1. Configure the Tectia SOCKS Proxy to listen on port 1080 on the client host and define the filter rules in the `ssh-socks-proxy-config.xml` configuration file. See [Section 9.2](#).
2. Create a user, for example, `SSHSP`, for running the SOCKS Proxy. See [Section 9.3](#).
3. Start the `ssh-socks-proxy` process. See [Section 9.4](#).
4. Configure the SOCKS settings for the FTP client. See [Section 9.5](#).

After these tasks are completed, the specified FTP connections will be automatically tunneled or converted to SFTP, transparently to the user.

9.2 Configuring the SOCKS Proxy

The Tectia SOCKS Proxy component used in transparent FTP tunneling and FTP-SFTP conversion does not use the regular client configuration `ssh-broker-config.xml`. Instead, the configuration is read from the `ssh-socks-proxy-config.xml` file.

Like the `ssh-broker-config.xml` file, the `ssh-socks-proxy-config.xml` file can be located in the system-wide `/opt/tectia/etc` directory and/or in the user-specific `$HOME/.ssh2` directory.

In ISPF you can access the SOCKS Proxy configuration file via the Tectia SSH Assistant's option **3.4 SOXP**.

The SOCKS Proxy reads the server host keys from the normal locations (`$HOME/.ssh2` and `$HOME/.ssh2/hostkeys`). However, if the server authenticates itself using a certificate, the information on the CA certificate (or the server certificate) must be defined separately in the `ssh-socks-proxy-config.xml` file.

9.2.1 The `ssh-socks-proxy-config.xml` configuration file

The `ssh-socks-proxy-config.xml` configuration file uses the same format as the `ssh-broker-config.xml` configuration file.

For a detailed description of the elements used in the configuration, see Appendix *Connection Broker and SOCKS Proxy Configuration Files* in *Tectia Server 6.7 for IBM z/OS User Manual*.

An example configuration file shown below tunnels all FTP connections using the host name and user name provided by the FTP client application. To enable the configuration, copy the text to `/opt/tectia/etc/ssh-socks-proxy-config.xml`. You can edit the `ssh-socks-proxy-config.xml` configuration file using a normal text editor.

```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE secsh-broker SYSTEM
  "/opt/tectia/etc/ssh-tectia/auxdata/ssh-broker-ng/ssh-broker-ng-config-1.dtd">
<secsh-broker version="6.6" >
  <default-settings>
    <authentication-methods>
      <auth-password />
      <auth-keyboard-interactive />
    </authentication-methods>
  </default-settings>
  <profiles>
    <profile name="dynamic-ftp"
      id="id1"
      host=""
      port="22"
      user="">
    </profile>
  <!--
    <profile name="winserver"
      id="winserver"
      host=""
      host-type="windows"
      port="22"
      user="">
    </profile>
  -->
    </profiles>
    <static-tunnels>
      <tunnel type="socks-proxy"
        listen-address="127.0.0.1"
        listen-port="1080"
        dst-port="0"
        profile="" />
    </static-tunnels>
    <filter-engine>
      <rule ip-address=".*"
        ports="21"
```

```

        action="ftp-tunnel"
        profile-id="id1"
        username-from-app="YES"
        hostname-from-app="YES"
        fallback-to-plain="NO" />
    </filter-engine>
    <logging>
        <log-events facility="auth" severity="informational">
            Connector_filter_rule
        </log-events>
    </logging>
</secsh-broker>

```

The following settings are required in the `ssh-socks-proxy-config.xml` file to enable transparent FTP tunneling or FTP-SFTP conversion:

default-settings

The `default-settings` element defines, for example, the user authentication methods used by the Tectia SOCKS Proxy. Requiring password authentication ensures that the password information provided by the FTP client application is used.

profiles

At least one `profile` element must be defined.

The profile `id` must be a unique identifier that does not change during the lifetime of the profile.

An additional `name` can be given to the profile. This is a free-form text string. The name must not contain any blanks/spaces.

The `host` attribute defines the address of the Secure Shell server host. If it is left empty and/or under the `filter-engine/rule` element `hostname-from-app="yes"`, the Secure Shell connection is opened to the destination host given in the SOCKS request. Otherwise the Secure Shell connection is opened to the host specified in the profile and in FTP tunneling, FTP connections are forwarded to the requested hosts.

The `port` attribute specifies the Secure Shell server port. The default port is 22.

The `host-type` attribute sets the target server type for ASCII (text) file transfer. This specifies the line break convention that is used for ASCII files. The default value is "default", meaning that the line break convention is determined by the local platform. If the client is running on Windows, Windows compatible line breaks (CR + LF, '\r\n') are used. If the client is running on any other platform, Unix compatible line breaks (LF, '\n') are used. Other possible values for `host-type` are "windows" (for Windows remote host) and "unix" (for Unix remote host). Define the value if you are using any other server than Tectia Server.

The `user` attribute specifies the user name on the Secure Shell server. If it is left empty, the user name given by the FTP client is used when opening the Secure Shell connection.

static-tunnels

At least one `tunnel` element must be defined.

For transparent tunneling, the tunnel `type` must be set as "socks-proxy" and the `port` as "1080".

The `listen-address` is usually the loopback address "127.0.0.1", but can be an address of any local interface that will be listened.

The `dst-port` attribute is set to 0 and the `profile` attribute is left empty when transparent tunneling and FTP-SFTP conversion are used.

filter-engine

At least one `rule` element must be defined.

The `ip-address` attribute specifies the target host IP address to be filtered. It can be a regular expression. Connections to the specified address are captured. With transparent FTP tunneling and FTP-SFTP conversion, this can be usually set to capture all connections (".*"), as the connections are already filtered by the SOCKS Proxy settings.

The `ports` attribute specifies the ports to be filtered. It can be a single port or a range. A range is specified with a dash between two integers (such as "21-25").

The `action` attribute specifies the action to be done when a filter is used. For transparent FTP tunneling, the action is "ftp-tunnel". For FTP-SFTP conversion, the action is "ftp-proxy".

The `profile-id` attribute is a reference to a `profile` element and should contain the same value as the `id` attribute of the profile.

The `hostname-from-app` attribute defines whether the SOCKS Proxy should extract the Secure Shell server's host name from data sent by the application, or use a Secure Shell server defined by the connection profile in `profile-id`. With Tectia SOCKS Proxy on z/OS, this is usually set to "yes". Note that this requires that a Secure Shell server is installed to each destination server (or that `fallback-to-plain` is enabled to allow direct connections to those servers that do not have Secure Shell installed).

The `username-from-app` attribute defines whether the FTP tunneling or FTP-SFTP conversion extracts the user name from data sent by the FTP application. With Tectia SOCKS Proxy on z/OS, this is usually set to "yes". This setting will override any user name settings made in a related connection profile.

When applying the filter rule, if creating the tunnel fails or the connection to the Secure Shell server fails, the SOCKS Proxy will normally return a "host not reachable" error. However, if the `fallback-to-plain` attribute is set to "yes", a direct (unsecured) connection is used instead.

9.2.2 Storing Remote Server Host Keys

When opening the transparent tunnel or an SFTP session with FTP-SFTP conversion, accepting new or changed server host keys cannot be prompted from the user. In addition, transparent FTP tunneling and FTP-SFTP conversion always use the IP address of the Secure Shell server when opening the secure tunnel. This means that the host keys of the Secure Shell tunneling servers must be stored beforehand based on the IP addresses of the servers.

The keys can be stored by connecting to each host individually with the IP address of the host using an interactive shell and accepting the host keys one by one, or by using the **ssh-keydist-g3** key distribution tool. More information and examples on storing remote server keys can be found in *Tectia Server 6.7 for IBM z/OS User Manual*.

Disabling Host Key Check

As an alternative to storing the remote server host keys, it is possible to disable the host key checking entirely. To do this, set the `auth-server-publickey` element's `policy` attribute to "advisory" in the `ssh-socks-proxy-config.xml` file.



Caution

Consider carefully before setting the policy to `advisory`. Disabling the host key checks makes you vulnerable to man-in-the-middle attacks.

In the following example the `auth-server-publickey` element is defined under default settings (`default-settings/server-authentication-methods`). It can also be defined per connection profile (under `profiles/profile/server-authentication-methods`).

```
<?xml version="1.0" encoding="UTF-8" ?>
<!DOCTYPE secsh-broker SYSTEM
  "/opt/tectia/etc/ssh-tectia/auxdata/ssh-broker-ng/ssh-broker-ng-config-1.dtd">
<secsh-broker version="6.6" >

  <default-settings>
    <server-authentication-methods>
      <auth-server-publickey policy="advisory" />
    </server-authentication-methods>
  </default-settings>

  <profiles>
  ...
  
```

For more information on the host key policy settings, see Appendix *Connection Broker and SOCKS Proxy Configuration Files* in *Tectia Server 6.7 for IBM z/OS User Manual*.

9.3 Creating the **sshsp** User

If **ssh-socks-proxy** is going to be run as a started task, you need to create a user for running it.

The **SSHSP** user can be created by running the job generated by Tectia SSH Assistant action **1.4 ADDSOXPU**.

9.4 Running the SOCKS Proxy

The SOCKS Proxy component consists of two processes:

ssh-socks-proxy

The Tectia SOCKS Proxy process that needs to be running before transparent tunneling connections can be made. The Tectia SOCKS Proxy started task can be controlled with the Tectia SSH Assistant ISPF application and with console modify commands. The process can also be started under USS or by using a JCL script.


For more information on the command-line options of **ssh-socks-proxy**, see the description of **ssh-broker-g3** in *Tectia Server 6.7 for IBM z/OS User Manual Appendix Command-Line Tools and Man Pages*. (Running **ssh-socks-proxy** will actually run **ssh-broker-g3** in the SOCKS Proxy mode, using the **ssh-socks-proxy-config.xml** configuration files and with connection caching disabled.)

ssh-socks-proxy-ctl

Control process for the SOCKS Proxy. It can be used, for example, to view the status of the SOCKS Proxy, to reconfigure or stop the SOCKS Proxy, or to load private keys to memory.

For more information on the **ssh-socks-proxy-ctl** options and commands, see the description of **ssh-broker-ctl** in *Tectia Server 6.7 for IBM z/OS User Manual Appendix Command-Line Tools and Man Pages*.

In the Tectia SSH Assistant ISPF application you can control the SOCKS Proxy (**ssh-socks-proxy**) via submenu **4.3 TSXP**.

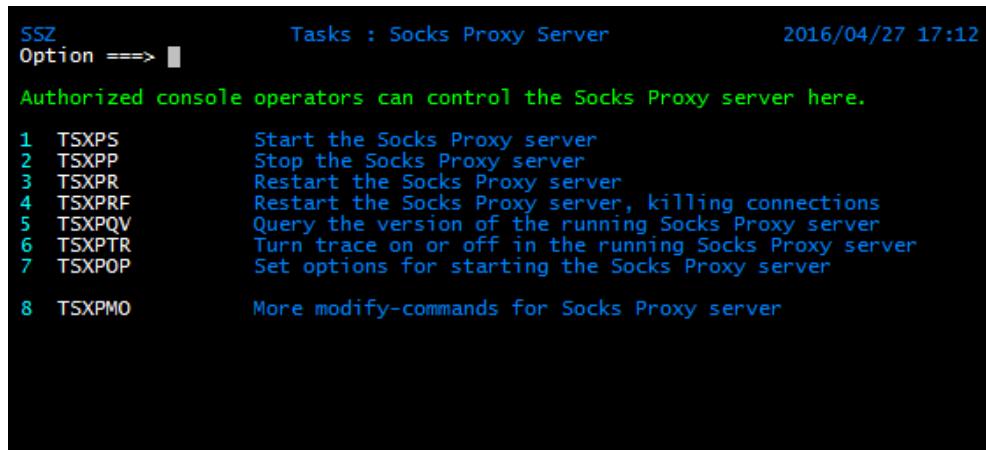

```

SSZ          Tasks : Socks Proxy Server          2016/04/27 17:12
Option ==> ■

Authorized console operators can control the Socks Proxy server here.

1 TSXPS      Start the Socks Proxy server
2 TSXPP      Stop the Socks Proxy server
3 TSXPR      Restart the Socks Proxy server
4 TSXPRF     Restart the Socks Proxy server, killing connections
5 TSXPQV     Query the version of the running Socks Proxy server
6 TSXPTR     Turn trace on or off in the running Socks Proxy server
7 TSXPOP     Set options for starting the Socks Proxy server
8 TSXPMO     More modify-commands for Socks Proxy server

```

Figure 9.3. Tectia SSH Assistant ISPF application - Tasks: Socks Proxy Server (4.3 TSXP)

Table 9.1 contains a summary of the modify commands and Tectia SSH Assistant options for controlling the SOCKS Proxy. They are described in more detail in the following sections.

Table 9.1. Controlling the SOCKS Proxy server

Command	Console	ISPF
Start	S SSHSP	4.3.1 TSXPS
Stop	F SSHSP,STOP OR P SSHSP	4.3.2 TSXPP
Query version	F SSHSP,VERSION	4.3.5 TSXPQV
Set trace level	F SSHSP,DEBUG <debug-level>	4.3.6 TSXPTR
Set options for starting	S SSHSP,OPTS='<options>'	4.3.7 TSXPOP
Get status information	F SSHSP,STATUS/ST	4.3.9 TSXPST
Get cryptographic algorithms information	F SSHSP,STATUS/ST ALGORITHMS/ALGS	4.3.10 TSXPAL
List open channels	F SSHSP,LIST-CHANNELS/LIST-CH/LCH	4.3.11 TSXPLCH
List open connections	F SSHSP,LIST-CONNECTIONS/LIST-CO/LC	4.3.12 TSXPLC
Get the status of a connection	F SSHSP,CONNECTION-STATUS/CONNECTI/CS	4.3.13 TSXPCS
Close a connection	F SSHSP,CLOSE-CONNECTION/CLOSE-CO/CC	4.3.14 TSXPCC

The console messages generated by the SOCKS Proxy are listed in Table E.2.

9.4.1 Starting the SOCKS Proxy

To run Tectia SOCKS Proxy as a started task, you can use the JCL procedure `USER.PROCLIB(SSHSP)` (note that the name, defined in [0.3 SETO](#), might differ from this default name). Before running the job, a user must be created for running the task (as described in [Section 9.3](#)). The user can be created by running the job generated by Tectia SSH Assistant action [1.4 ADDSOXPU](#).

Console

Start the SOCKS Proxy with the following operator command:

```
====> S SSHSP
```

The `ssh-socks-proxy` job starts.

ISPF

To start the SOCKS Proxy, enter option **4.3.1 TSXPS (Start the SOCKS Proxy server)**.

You should see the following console message:

```
ISF031I CONSOLE <USERID> ACTIVATED
-S SSHSP
+SSZ3006I Task ssh-socks-proxy started
```

USS

Under USS, Tectia SOCKS Proxy can be started by running the following command:

```
> /opt/tectia/bin/ssh-socks-proxy
```

For more information on the command-line options of `ssh-socks-proxy`, see the description of `ssh-broker-g3` in Appendix *Command-Line Tools and Man Pages of Tectia Server 6.7 for IBM z/OS User Manual*.

9.4.2 Stopping the SOCKS Proxy

Console

To stop the SOCKS Proxy under MVS when you are running it as a started task, enter:

```
====> F SSHSP,STOP
```

OR:

```
====> P SSHSP
```

ISPF

To stop the SOCKS Proxy in ISPF, enter the Tectia SSH Assistant option **4.3.2 TSXPP (Stop the SOCKS Proxy server)**.

You should see the following console message:

```
ISF031I CONSOLE <USERID> ACTIVATED
-P SSHSP
+SSZ3003I Command STOP accepted
```

USS

To stop the SOCKS Proxy under USS, execute one of the following commands:

```
> /opt/tectia/bin/ssh-socks-proxy --exit
```

OR:

```
> /opt/tectia/bin/ssh-socks-proxy-ctl stop
```

9.4.3 Querying the SOCKS Proxy Version

Console

You can query the version of the SOCKS Proxy with the following console command:

```
====> F SSHSP,VERSION
```

ISPF

To check the version of the SOCKS Proxy in ISPF, enter the Tectia SSH Assistant option **4.3.5 TSXPQV (Query the version of the running SOCKS Proxy server)**.

9.4.4 Reloading ssh-socks-proxy configuration

If you make changes to the `ssh-socks-proxy-config.xml` configuration file the changes will not take effect until the SOCKS Proxy configuration is reloaded. After you have reloaded the SOCKS Proxy configuration, existing connections will continue to use the old configuration settings while new connections will use the reconfigured settings.

You can reload the SOCKS Proxy to the current configuration file by executing the following command:

```
> /opt/tectia/bin/ssh-socks-proxy-ctl reload
```

9.4.5 Setting Options for Starting the SOCKS Proxy

Console

As an OPTS parameter, you can give parameters that the actual SOCKS Proxy binary accepts.

For more information on the command-line options of `ssh-socks-proxy`, see the description of `ssh-broker-g3` in *Tectia Server 6.7 for IBM z/OS User Manual Appendix Command-Line Tools and Man Pages*. (Running `ssh-socks-proxy` will actually run `ssh-broker-g3` in the SOCKS Proxy mode, using the `ssh-socks-proxy-config.xml` configuration files and with connection caching disabled.)

For example:

```
====> S SSHSP,OPTS=' -D 9 '
```

ISPF

To set options for starting the SOCKS Proxy in ISPF, enter the Tectia SSH Assistant option **4.3.7 TSXPOP**.

The available options are described in detail in the description of **ssh-broker-g3** in *Tectia Server 6.7 for IBM z/OS User Manual Appendix Command-Line Tools and Man Pages*.

9.4.6 More Modify Commands for the SOCKS Proxy Server

The following modify commands are also available for the running SOCKS Proxy:

CLOSE-CONNECTION/CLOSE-CO/CC

Closes the defined connection. You can also enter multiple connection IDs to close several connections.

CONNECTION-STATUS/CONNECTI/CS

Displays a detailed connection status for the connection ID (the numeric identifier shown by the LIST-CONNECTIONS) command.

LIST-CHANNELS/LIST-CH/LCH

Displays a list of the currently open connection channels, together with channel type and traffic statistics. Displays also the channel ID which is used by other commands to identify the connection.

LIST-CONNECTIONS/LIST-CO/LC

Displays a list of the currently open connections together with connection parameters and traffic statistics. Displays also the connection ID which can be used with other commands to identify the connection.

STATUS/ST [ALGORITHMS/ALGS]

Without parameters, displays short statistics and a configuration summary for the currently running SOCKS Proxy.

Options:

ALGORITHMS/ALGS

Displays the supported cryptographic algorithms for key exchange, host key, ciphers, MACs, compression, and user authentication.

The same commands can be executed using the options in the Tectia SSH Assistant submenu **4.3.8 TSXPMO**.

```

SSZ          Tasks : Socks Proxy Server      2016/05/11 12:35
Option ===> ■

More modify-commands for the Socks Proxy server can be issued

 9 TSXPST      Get status information for the server
10 TSXPAL      Get cryptographic algorithms information
11 TSXPLCH    List open channels
12 TSXPLC      List open connections
13 TSXPCS      Get the status of a connection
14 TSXPCC      Close a connection

```

Figure 9.4. Tectia SSH Assistant ISPF application - More modify commands for the SOCKS Proxy server (4.3.8 TSXPMO)

9.5 Configuring FTP

To enable transparent FTP tunneling, the SOCKS setting in the FTP application needs to be pointed to a localhost listener.

If you are running a real SOCKS proxy on your z/OS system and the localhost port 1080 is already reserved, you can add a second loopback address to your TCPIP profile for the transparent FTP tunneling proxy.

To add the secondary IP address, edit the TCPIP profile on your z/OS system. Under the HOME heading, add the following line:

```
127.0.0.2      LOOPBACK
```

Make it the second IP address, or put it lower down, because the first address is the machine's default IP address. Follow the procedure shown in ZOS TCPIP Setup. Check that the address is there with the following TSO command:

```
====> NETSTAT HOME
```

9.5.1 Editing the FTP Client Configuration

To make the FTP client use SOCKS, add or edit the FTP client configuration data set (or file). The FTP client configuration can be defined in several places (globally or per user) and the first configuration found is used. The search order for the configuration is listed in the IBM document *z/OS Communication Server: IP Configuration Reference*. Make sure that you define the configuration in a location that has the highest precedence on your system.

In the FTP client configuration data set (for example, *userid.FTP.DATA*), add the following line that specifies the SOCKS configuration file to be used, for example:

```
SOCKSCONFIGFILE /etc/socks.conf
```

The example above specifies a SOCKS configuration that is usable in the whole system. The SOCKS configuration can also be user-specific, for example `$HOME/socks.conf`.

The SOCKS configuration can also be a data set, for example:

```
SOCKSCONFIGFILE TSTUSR.SSHFTP.SOCKS.CONF
```

FTP clients must use PASSIVE or EXTENDED PASSIVE mode for file transfers. ACTIVE mode is not supported with transparent FTP tunneling. To activate PASSIVE mode, add the following line to the FTP client configuration data set:

```
FWFRIENDLY TRUE
```



Note

The FTP client configuration setting `PASSIVEIGNOREADDR` is set to `FALSE` by default, enabling FTP PASSIVE mode. This setting is required for the SOCKS Proxy to work and it should not be changed in the FTP client configuration data set if the SOCKS Proxy is to be used.

9.5.2 Creating the SOCKS Configuration

Create or edit the SOCKS configuration file or data set you have defined in the FTP configuration (for example, `/etc/socks.conf`).

The following configuration secures connections to hosts 192.168.10.5 and 192.168.10.10, and to class C network 192.168.20.0. Connections to other addresses will be direct:

```
sockd @=127.0.0.1 192.168.10.5 255.255.255.255
sockd @=127.0.0.1 192.168.10.10 255.255.255.255
sockd @=127.0.0.1 192.168.20.0 255.255.255.0
direct 0.0.0.0 0.0.0.0
```

The following configuration assumes that the loopback address for transparent FTP tunneling proxy was changed. It makes all FTP connections use SOCKS on the new loopback address:

```
sockd @=127.0.0.2 0.0.0.0 0.0.0.0
```

9.6 Examples of Transparent FTP Security

This section gives an example of system-wide settings for transparent FTP tunneling and an example of FTP-job-specific settings for transparent FTP tunneling and FTP-SFTP conversion.

The steps assume that the `SSHSP` user created in [Section 9.3](#) is used for running the Tectia SOCKS Proxy.

Before attempting transparent tunneling, test that the connection to the tunneling server works using `sshg3`.

9.6.1 System-Wide Transparent FTP Tunneling with Fallback

In this example, transparent FTP tunneling is configured to secure file transfers to three different subnets (10.70.20.0/24, 172.16.8.0/21, and 192.168.93.0/25). Configuration is done system-wide affecting all FTP batch jobs and interactive sessions to those three subnets. FTP connections to other addresses are not affected.

In this example, Tectia SOCKS Proxy is configured to fall back to plain FTP if securing the connection fails. Fallback is a usable feature during the migration phase but must be turned off once all connections are working correctly.

Do the following steps:

1. Copy the `/opt/tectia/etc/ssh-socks-proxy-config-example.xml` configuration file to `/opt/tectia/etc/ssh-socks-proxy-config.xml` (if it does not exist yet).
2. Edit the file to enable fallback to plaintext FTP for transparent FTP tunneling:

```
<filter-engine>
  <rule ip-address=".*"
        ports="21"
        action="ftp-tunnel"
        profile-id="id1"
        username-from-app="YES"
        hostname-from-app="YES"
        fallback-to-plain="YES" />
</filter-engine>
```

3. (Re)start the SOCKS Proxy.
4. Edit the system-wide FTP configuration file `SYS1.TCPPARMS(FTPDATA)` to include the following lines:

```
SOCKSCONFIGFILE EXAMPLE.SYSTEM.SOCKS.CONF
FWFRIENDLY TRUE
```

5. Create a new SOCKS configuration data set `EXAMPLE.SYSTEM.SOCKS.CONF` with the following contents:

```
sockd @=127.0.0.1 10.70.20.0 255.255.255.0
sockd @=127.0.0.1 172.16.8.0 255.255.248.0
sockd @=127.0.0.1 192.168.93.0 255.255.255.128
direct 0.0.0.0 0.0.0.0
```

9.6.2 JCL-Specific Transparent FTP Tunneling or FTP-SFTP Conversion

In this example, transparent FTP tunneling or FTP-SFTP conversion is configured per FTP JCL job using a `SYSFTPD DD` statement.

Do the following steps:

1. Copy the `/opt/tectia/etc/ssh-socks-proxy-config-example.xml` configuration file to `/opt/tectia/etc/ssh-socks-proxy-config.xml`.
2. (*FTP-SFTP conversion only*) If you want to use FTP-SFTP conversion, edit the configuration file and change the value of the `action` attribute to "ftp-proxy":

```
<filter-engine>
  <rule ip-address=".*"
        ports="21"
        action="ftp-proxy"
        profile-id="id1"
        username-from-app="YES"
        hostname-from-app="YES"
        fallback-to-plain="NO" />
</filter-engine>
```

3. Start the SOCKS Proxy if it is not already running.
4. Create a new FTP configuration file `EXAMPLE.SSHFTP.FTPDATA` with the following contents:

```
SOCKSCONFIGFILE EXAMPLE.JCL.SOCKS.CONF
FWFRIENDLY      TRUE
```

5. Create a new socks configuration data set `EXAMPLE.JCL.SOCKS.CONF` with the following contents:

```
sockd @=127.0.0.1 0.0.0.0 0.0.0.0
```

6. Modify your existing FTP JCL to use SOCKS by adding a `SYSFTPD` DD statement, for example:

```
//FTP      EXEC PGM=FTP,PARM='company.example.com
(EXIT=8'
//SYSPRINT DD SYSOUT=*
//SYSFTPD   DD DSN=EXAMPLE.SSHFTP.FTPDATA,DISP=SHR
//SYSIN     DD *
userid    passwd
ascii
get test.file 'USERID.FTP.TEST'
quit
/*
```


Chapter 10 Tunneling

Tunneling is a way to forward otherwise unsecured TCP traffic through Secure Shell. Tunneling can provide secure application connectivity, for example, to POP3-, SMTP-, and HTTP-based applications that would otherwise be unsecured.

The Secure Shell v2 connection protocol provides channels that can be used for a wide range of purposes. All of these channels are multiplexed into a single encrypted tunnel and can be used for tunneling (forwarding) arbitrary TCP/IP ports.

The client-server applications using the tunnel will carry out their own authentication procedures, if any, the same way they would without the encrypted tunnel.

The protocol/application might only be able to connect to a fixed port number (e.g. IMAP 143). Otherwise any available port can be chosen for tunneling. For remote (incoming) tunnels, the ports under 1024 (the well-known service ports) are not allowed for the regular users, but are available only for system administrators (root privileges).

There are two basic kinds of tunnels: local (outgoing) and remote (incoming). Agent forwarding is a special case of a remote tunnel.

10.1 Local Tunnels

A local (outgoing) tunnel forwards traffic coming to a local port to a specified remote port.

With **sshg3** on the command line, the syntax of the local tunneling command is the following:

```
$ sshg3 -L [protocol/] [listen-address:] listen-port:dst-host:dst-port server
```

Setting up local tunneling allocates a listener port on the local client. Whenever a connection is made to this listener, the connection is tunneled over Secure Shell to the remote server and another connection is made from the server to a specified destination host and port. The connection from the server onwards will not be secure, it is a normal TCP connection.

[Figure 10.1](#) shows the different hosts and ports involved in local tunneling.

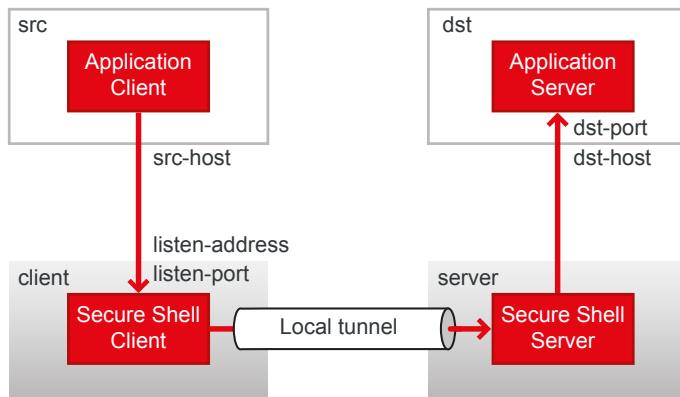


Figure 10.1. Local tunneling terminology

For example, when you issue the following command, all traffic coming to port 1234 on the client will be forwarded to port 23 on the server. See [Figure 10.2](#).

```
$ sshg3 -L 1234:localhost:23 username@sshserver
```

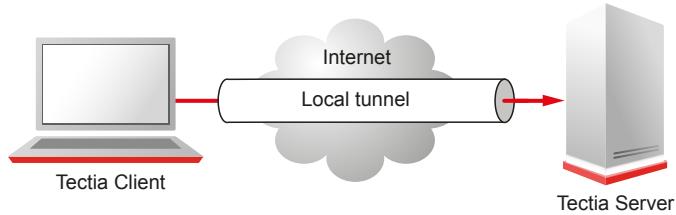


Figure 10.2. Simple local (outgoing) tunnel

The forwarding address in the command is resolved at the (remote) end point of the tunnel. In this case `localhost` refers to the server host (`sshserver`).

If you have three hosts, for example, `sshclient`, `sshserver`, and `imapserver`, and you forward the traffic coming to the `sshclient` port 143 to the `imapserver` port 143, only the connection between `sshclient` and `sshserver` will be secured. The command you use would be similar to the following:

```
$ sshg3 -L 143:imapserver:143 username@sshserver
```

[Figure 10.3](#) shows an example where the Secure Shell server resides in the DMZ network. The connection is encrypted from the Secure Shell client to the Secure Shell server and continues unencrypted in the corporate network to the IMAP server.

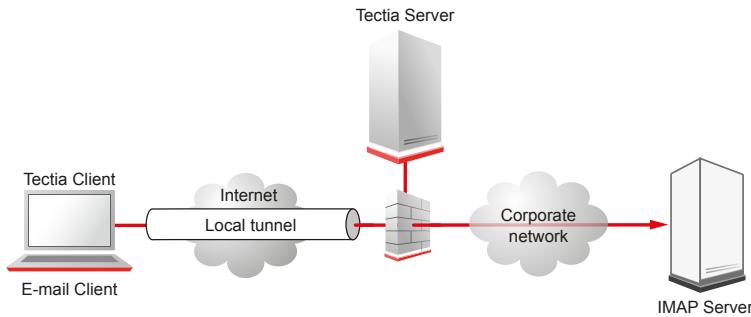


Figure 10.3. Local (outgoing) tunnel to an IMAP server

By default, the server allows local tunnels to all addresses for all users. To restrict tunneling for all or for specified users, see [Section 4.9.3](#).

10.1.1 Tunneling TN3270

Use Tectia Client on Windows and Tectia Server for IBM z/OS on mainframe to tunnel TN3270 application connections.

The administrator specifies tunneling rules for the TN3270 application connection(s) that need to be secured. Alternatively, it is possible to require that all terminal connections initiated by a certain terminal emulator will be tunneled.

When the terminal client accesses a remote mainframe, Tectia Client captures the connection and establishes a secure tunnel between the workstation and the IBM z/OS system. All TN3270 application-connection traffic is then transmitted over an encrypted Secure Shell tunnel, ensuring confidentiality of passwords and application data.

10.2 Remote Tunnels

A remote (incoming) tunnel forwards traffic coming to a remote port to a specified local port.

With **sshg3** on the command line, the syntax of the remote tunneling command is the following:

```
$ sshg3 -R [protocol/] [listen-address:]listen-port:dst-host:dst-port server
```

Setting up remote tunneling allocates a listener port on the remote server. Whenever a connection is made to this listener, the connection is tunneled over Secure Shell to the local client and another connection is made from the client to a specified destination host and port. The connection from the client onwards will not be secure, it is a normal TCP connection.

[Figure 10.4](#) shows the different hosts and ports involved in remote tunneling.

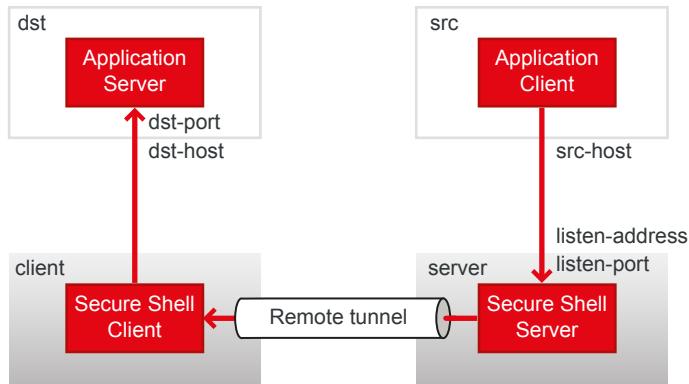


Figure 10.4. Remote tunneling terminology

For example, if you issue the following command, all traffic coming to port 1234 on the server will be forwarded to port 23 on the client. See [Figure 10.5](#).

```
$ sshg3 -R 1234:localhost:23 username@sshserver
```

The forwarding address in the command is resolved at the (local) end point of the tunnel. In this case `localhost` refers to the client host.

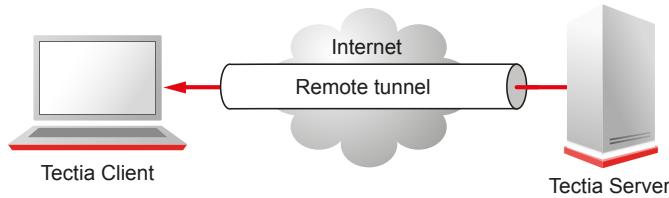


Figure 10.5. Remote (incoming) tunnel

By default, the server allows remote tunnels from all addresses for all users. To restrict tunneling for all or for specified users, see [Section 4.9.3](#).

10.3 Agent Forwarding

Agent forwarding is a special case of remote tunneling. In agent forwarding, Secure Shell connections and public-key authentication data are forwarded from one server to another without the user having to authenticate separately for each server. Authentication data does not have to be stored on any other machine than the local machine, and authentication passphrases or private keys never go over the network.

By default, Tectia Server for IBM z/OS allows agent forwarding. To deny agent forwarding, set the `AllowAgentForwarding` or `ForwardAgent` keyword in the `sshd2_config` configuration file to `no`.

Chapter 11 Troubleshooting Tectia Server for IBM z/OS

This chapter gives instructions on debugging and lists some common error situations that may arise with Tectia Server for IBM z/OS.

You can use a troubleshooting tool **ssh-troubleshoot** to collect system information, such as platform version, patches, configuration settings, installed software components, and the current environment and state; and information on the Tectia installation (installed product components and versions, their state, and the global and user-specific configurations). The collected information will be stored in file that you can send to SSH technical support for analysis to help in troubleshooting situations. See description of the **ssh-troubleshoot** tool in *Tectia Server 6.7 for IBM z/OS User Manual*.

See the Release Notes for known issues in this release of Tectia Server for IBM z/OS.

11.1 Debugging Tectia Server for IBM z/OS

The server can be debugged by using either the **-d** or **-D** option.

The **-d** option launches the server to one-shot mode. In this mode, the server accepts only one connection and exits after the session is disconnected. The server does not spawn a separate task for the connection.

The **-D** option launches the server to continuous debug mode. In this mode, the server keeps on listening to the TCP port and accepts several connections. The server spawns a new task for each new connection and needs to be stopped manually when you want to finish the debugging.

The debug level is either a number, or a comma-separated list of assignments of the format `ModulePattern=debug_level`, for example `"*=7,sshd2=2"`. Debug level 4 is usually sufficient. For more detailed information, debug level 7 can be used.

11.1.1 Setting the Debug Level

Setting the Debug Level in the Console

When **sshd2** is run as a started task, the debug level of the running server can be set using the z/OS console modify command **debug**.

To set the debug level of the running server, issue the following command (where *debuglevel* is a number from 1 to 99 indicating the level of diagnostics information required) from the z/OS console:

```
====> F SSSH2,DEBUG debuglevel
```

For example, to set debug level 4 (which is in most cases sufficient):

```
====> F SSSH2,DEBUG 4
```

To disable server debug, set debug level to 0 as follows:

```
====> F SSSH2,DEBUG 0
```

Setting the Debug Level in ISPF

To set the debug level of the server in ISPF, enter the Tectia SSH Assistant option **4.1.6 TSRVTR (Turn trace on or off in the running SSH server)**.

The trace level is a number which directs the server to produce diagnostic trace information on restart. Enter a trace level number in the **Options** field provided.

Trace level 2 provides user-oriented messages.

To disable server debug, set trace level number to 0.

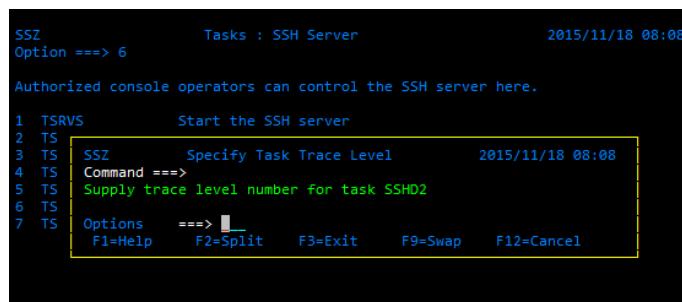


Figure 11.1. Tectia SSH Assistant ISPF application - Turn trace on or off in the running SSH server (4.1.6 TSRVTR)

11.1.2 Debugging Using USS shell

When debugging the server, a second server daemon can be started to a different TCP port or alternatively the existing server can be stopped and the same port can be used for debugging.

Debugging can be started with the following command (run as the `sshd2` user):

```
> /opt/tectia/sbin/sshd2 -d 4 -p 1234
```

In the command, `-d` defines the debug level and `-p` the TCP port. With this command the debug output is displayed to the screen.

Debug can also be forwarded to a file:

```
> /opt/tectia/sbin/sshd2 -d 4 -p 1234
> /tmp/sshd2_debug.out 2>&1
```

Debugging for the SFTP server subsystem can be controlled with the `SSH_SFTP_DEBUG` and `SSH_SFTP_DEBUG_FILE` environment variables. `SSH_SFTP_DEBUG` defines the debug level for the file transfer server. `SSH_SFTP_DEBUG_FILE` defines the output file for the debug messages. See [Section 11.1.3](#) below.

11.1.3 Debugging File Transfer

Tectia Server for IBM z/OS uses a separate process, **sft-server-g3**, for file transfer operations.

To obtain debug information from **sft-server-g3**, you can use the environment variables `SSH_SFTP_DEBUG`, `SSH_SFTP_DEBUG_FILE`, and `SSH_DEBUG_FMT`.

When the debugging is enabled, the **sft-server-g3** debug messages are by default sent to the standard error that goes also to the SFTP client. If you want to forward the **sft-server-g3** debug messages into a file and not to the client, you can add the following two environment variables affecting the secure file transfer user into the `/etc/environment` file or the user-specific `$HOME/.ssh2/environment` file on the server:

- `SSH_SFTP_DEBUG` defines the debug level that controls the messages that the **sft-server-g3** process will be showing while executing. To get some debug data, you can use, for example:

```
SSH_SFTP_DEBUG=Sftp=12
```

To get more details, you can use, for example:

```
SSH_SFTP_DEBUG=Sftp*=12,SshFile*=12
```

To get even deeper level of detail, you can use, for example:

```
SSH_SFTP_DEBUG=Sftp*=15,Ssh*File*=15,Ssh*Dir*=15
```

To get full debugging information from the SFTP server, use:

```
SSH_SFTP_DEBUG=Sftp*=20,Ssh*File*=20,Ssh*Dir*=20
```

To get most low-level z/OS debugging information:

```
SSH_SFTP_DEBUG=*Mvs*=17
```

To get all low-level z/OS debugging information:

```
SSH_SFTP_DEBUG=*Mvs*=99
```

To get all debugging information related to data set allocation:

```
SSH_SFTP_DEBUG=SshFileMvsAllocate=99
```

To get all debugging information related to z/OS catalog:

```
SSH_SFTP_DEBUG=SshFileMvsCatalog=99
```

- `SSH_SFTP_DEBUG_FILE` defines the file where the debug messages from the **sft-server-g3** will be printed. The value can be, for example:

```
SSH_SFTP_DEBUG_FILE=/tmp/sft_debug.txt
```

Note that the path must be given without quotation marks. If this variable is not defined, the messages will be sent to standard error and the SFTP client will receive them.

- `SSH_DEBUG_FMT` defines the format of the debug messages. The default variable used is:

```
SSH_DEBUG_FMT=%Dd/%Dt/%Dy %Dh:%Dm:%Ds:%Df %m/%s:%n:%f %M
```

For more information on the syntax of this variable, see the description of **sftpg3** in Appendix *Command-Line Tools and Man Pages in Tectia Server 6.7 for IBM z/OS User Manual*.

On the client side, it is also possible to use the **debug** command of **sftpg3** to get debugging information. For example, to get basic debugging data, give the command:

```
sftp> debug Sftp*=2
```

The same debug strings as with `SSH_SFTP_DEBUG` can also be used.

11.2 Solving Problem Situations

The following sections give workaround instructions for a few problem situations that may occur with Tectia Server for IBM z/OS.

11.2.1 Using the OMVS Shell

INPUT

Appears as a status indicator.

When invoking long-running commands in the OMVS shell, and when the status indicator changes to INPUT, press PF10 to keep the command running.

CEE3536S Not enough storage was available for the WSA

To enable the user to open the shell or other daemon, you need to increase the maximum region size (in bytes) for the address space of the WSA process. You can set a system-wide limit in BPXPRMxx and then set higher limits for individual processes.

For OMVS, increase the size of the address space to 75MB in the RACF user profile. Use the RACF ADDUSER or ALTUSER command to specify the ASSIZEMAX limit on a per-process basis as follows:

```
ALTUSER userid OMVS(ASSIZEMAX(75000000)
```

For more detailed instructions, see [Section 3.4](#).

11.2.2 Common MVS Error Messages

BPXP015I ... PROGRAM ... IS NOT MARKED PROGRAM CONTROLLED

The program is not marked program-controlled. Depending on the program, the following steps may help:

- If the program is **sshd2**, run the following:

```
>extattr +p /opt/tectia/sbin/sshd2
```

- If the program is **CEE.SCEERUN2**, see [Section 2.1.2](#).
- If the program is **sshg3**, the reason may be that the **sshg3** client does not work if **su** is used before establishing the Secure Shell connection. The error output depends on the terminal used and what kind of an **su** is made before the **sshg3** connection attempt. **sshg3** does not need to be program-controlled, instead avoid using **su** before starting **sshg3**.

11.2.3 Common Tectia Server for IBM z/OS Error Messages

Environment variable '_BPXK_AUTOCVT' is not set, Environment variable '_BPXK_AUTOCVT' is incorrect

This environment variable must always be set to a specific value when running Tectia Server for IBM z/OS programs (see [Section 3.3](#)). When running under **BPXBATCH** use the **SSHENV** (located in **<HLQ>.V676.PARMLIB(SSHENV)**) data set on a **STDENV** DD statement. Before running client programs from a USS command prompt, source the **sshsetenv** script (located in **/opt/tectia/doc/zOS/samples**).

sshd2[50397305]: FATAL ERROR: setuid: EDC5157I An internal error has occurred., sshd2[50397305]: FATAL: setuid: EDC5157I An internal error has occurred.

If a login attempt ends with this error message from the server, the reason may be that **sshd2** is not marked program-controlled. You can correct this by running:

```
>extattr +p /opt/tectia/sbin/sshd2
```

11.2.4 Exceeding Maximum CPU Time

In some environments it is possible that CPU time is restricted per user process. This can cause the transfer of large files or long-running terminal sessions to fail.

The problem can manifest itself as the signal 29 (SIGXCPU) error, which means that the allocated CPU time per process was exceeded.

Global

The global maximum CPU time can be defined in MAXCPUTIME in the `SYS1.PARMLIB(BPXPRMxx)` file.

```
MAXMMAPAREA(40960)
MAXCORESIZE(4194304)
MAXASSIZE(2147483647)
MAXCPUTIME(2147483647)
```

The defined `SYS1.PARMLIB(BPXPRMxx)` values can be easily displayed with the console command `D OMVS,o`.

OMVS

The CPU time can be defined in the RACF OMVS segment with the `CPUTIMEMAX` option as follows:

```
OMVS INFORMATION
-----
UID= 0000000000
HOME= /
PROGRAM= /bin/sh
CPUTIMEMAX= NONE
ASSIZEMAX= 0268435456
FILEPROCMAX= NONE
PROCUSERMAX= NONE
THREADSMAX= NONE
MMAPAREAMAX= NONE
```

JCL

In JCL, the CPU time can be defined with the `TIME` option. Defining `TIME=1440` sets unlimited CPU time.

11.2.5 Auxiliary Storage Shortage

The Tectia Server for IBM z/OS server program `sshd2` may make large demands on Auxiliary Storage.

If the server causes the total allocation of virtual storage in the system to approach the amount of Auxiliary Storage available, the system may enter an Auxiliary Storage Shortage state, which will require operator action to rectify. In this state the system will fail to start new processes.

When a client requests file statistics or file transfer the server may stage the file into memory. Staging a data set means that the server creates a Hiperspace memory file and copies the whole data set into it. Each memory file will be the size of the converted data set, up to 2 GB. A memory file is retained until a file transfer operation on it has ended or the connection is ended. The server may concurrently retain several memory files.

Clients that have a file-listing feature may request file statistics for every file in a directory.

Thus a user on a remote machine may cause an Auxiliary Storage Shortage by executing the **sftp** command **ls** in a directory that contains many files or several large files, or **get** for a very large data set or file. The user must be authenticated before entering commands.

Tectia Server for IBM z/OS allows limiting the total amount of virtual storage that is used on one client connection. The limit can be set in the `SSH_SFTP_STAGEFS_CACHE_SIZE_LIMIT` environment variable.

Users should take precautions against the occurrence of an Auxiliary Storage Shortage situation as follows:

- Have a spare page data set available.
- Be prepared to identify and cancel the process causing the shortage.
- Issue the `PAGEADD` command to make the spare page data set available to the system.

11.2.6 SSHD2 Cannot Be Started as a Started Task

Please see the correct started task format from `USER.PROCLIB(SSHD2)` (see [the section called “Console”](#)).

Also verify that you have the correct environment variables set. See [Section 3.3](#).

If the task fails, please see the output of the `STDERR` file defined on the started task (by default `/tmp/SSHD2-sshd2.err`).

11.2.7 File Transfer Server Log Messages with Wrong Timestamps

File transfer server **sft-server-g3** writes syslog messages with incorrect timestamps.

Probably the timezone for USS processes has been set only in `/etc/profile`, which is sufficient for most USS operations, but it does not get read when **sft-server-g3** is launched. Verify that `/etc/environment` contains a correct timezone declaration.

For example, setting Eastern Standard Time with Daylight Savings Time:

```
TZ=EST5EDT,M3.2.0/2:00:00,M11.1.0/2:00:00
```

For more information on the syntax of the `TZ` variable, see the z/OS USS documentation.

Appendix A Man Pages

The following server manual pages are installed to `/opt/tectia/man`:

- [ssh-certd\(8\)](#): Secure Shell Certificate Validator on z/OS
- [ssh_certd_config\(5\)](#): configuration file format for **ssh-certd** on z/OS
- [ssh-dummy-shell\(1\)](#): ultimately restricted shell
- [ssh-externalkeys\(5\)](#): instructions on using external keys with Tectia Server for IBM z/OS
- [sshd-check-conf\(5\)](#): check what your configuration allows or denies based on incoming user name and/or host name
- [sshd2\(8\)](#): Secure Shell server daemon on z/OS
- [sshd2_config\(5\)](#): **sshd2** configuration file format on z/OS
- [sshd2_subconfig\(5\)](#): advanced configuration of **sshd2** on z/OS
- [sshregex\(1\)](#): describes the regular expressions (or globbing patterns) used in the `sshd2_config` configuration file

For convenience, the contents of the manual pages are also shown in the following sections.

ssh-certd

ssh-certd -- Secure Shell Certificate Validator on z/OS

Synopsis

```
ssh-certd [-d debug_level_spec] [-f config_file] [-o options] [-l listener_path] [-F] [-v] [-V]
[-q]
```

Description

ssh-certd (Secure Shell Certificate Validator) is a common process for validating certificates, used primarily by **sshd2** when validating user certificates. Without a common place for the validations, all the data needed for the validation would need to be duplicated in every process doing the validations. This would be very inefficient especially in cases where very large CRLs (certificate revocation lists) are to be used. **ssh-certd** allows CRLs and CA certificates to be loaded only once and then used for all subsequent validations.

ssh-certd is normally started at boot time from `/etc/rc.local` or equivalent. It opens a listener socket by default at `/opt/tectia/var/run/ssh-certd-listener`. The location of the listener can be changed with the `CertdListenerPath` keyword of `sshd2_config`.

ssh-certd can be configured using command-line options or a configuration file. Command-line options override values specified in the configuration file. **ssh-certd** reads configuration data from `/opt/tectia/etc/ssh_certd_config` (or the file specified with the `-f` option on the command line). By default, the configuration file contains only the keyword `UseSSHD2ConfigFile`, which instructs **ssh-certd** to read the specified **sshd2** configuration file in compatibility mode, where the configuration options of **sshd2** are silently ignored, and only the options relating to certificate or general daemon configuration are read.

Start **ssh-certd** as a started task as follows:

```
====> s sshcertd
```

The started task takes modify commands as follows:

```
====> f sshcertd,<command>
```

The following modify commands are supported:

debug *debug_level*

Set the debug level of the running Certificate Validator.

stop

Stop the Certificate Validator.

restart

Restart the Certificate Validator.

version

Query the version of the Certificate Validator.

Options

The following options are available for **ssh-certd**:

-d debug_level_spec

Debug mode. The server sends verbose debug output to `STDERR`. This option is only intended for debugging for the server. The debugging level is either a number, or a comma-separated list of assignments of the format `ModulePattern=debug_level`, for example `"*=10,sshd2=2"`. This should be the first argument on the command line.

-f configuration_file

Specifies the name of the configuration file. The default is `/opt/tectia/etc/ssh_certd_config`.



Note

If this option is specified, the default configuration file is not read at all.

-o 'option'

Can be used to give options in the format used in the configuration files. This is useful for specifying options for which there is no separate command-line flag. The option has the same format as a line in the configuration file. Comment lines are not accepted. Where applicable, egrep regex format is used.

-l listener-path

Specifies the path where the server will open the listener socket.

-F

Disables daemon mode. The server does not spawn a new process to the background.

-v

Enables verbose mode. Displays verbose debugging messages. Equal to `-d 2`. This option can also be specified in the configuration file.

-V

Displays the version string.

-q

Quiet mode. Nothing is sent to the system log. Normally the beginning, authentication, and termination of each connection is logged. This option can also be specified in the configuration file.

Configuration File

ssh-certd reads configuration data from `/opt/tectia/etc/ssh_certd_config` (or the file specified with `-f` on the command line). The file contains keyword-value pairs, one per line. Lines starting with '#' and empty lines are interpreted as comments.

For the format of `ssh_certd_config`, see [ssh_certd_config\(5\)](#).

Files

`/opt/tectia/etc/ssh_certd_config`

Contains configuration data for **ssh-certd**. This file should be writable by root only, but it is recommended (though not necessary) that it be world-readable. For ease of migration from older installations, `ssh_certd_config` contains by default the line "UseSSHD2ConfigFile `sshd2_config`", which instructs **ssh-certd** to read the certificate configuration from the **sshd2** configuration file and ignore the options that are not relevant to it.

ssh_certd_config

ssh_certd_config -- configuration file format for ssh-certd on z/OS

Configuration File

ssh-certd reads configuration data from `/opt/tectia/etc/ssh_certd_config` (or the file specified with `-f` on the command line). The file contains keyword-value pairs, one per line. For a description of the configuration file format, see [sshd2_config\(5\)](#).

The following keywords are allowed:

CertCacheFile

This keyword specifies the name of the file where the certificates and CRLs are cached when **ssh-certd** goes down.

Cert.DODPKI

If set to `yes`, the certificates are required to be DoD PKI compliant. The argument must be `yes` or `no`. The default is `no`.

CrlAutoUpdate

The argument is of the format: `{yes,no}[,update_before=seconds][,min_interval=seconds]`

This keyword turns on the CRL auto-update feature. When it is on, **ssh-certd** periodically tries to download the new CRL before the old one has expired. The `update_before` keyword specifies how many seconds before the expiration the update takes place. The `min_interval` sets a limit for the maximum update frequency (default minimum interval is 30 seconds).

CrlPrefetch

The argument is of the format: `seconds URL`. This keyword instructs **ssh-certd** to periodically download a CRL from the specified URL. The first argument specifies how often the CRL is downloaded.

ExternalMapper

This keyword specifies an external mapper program for the preceding `Pki` keyword. When a certificate is received and is valid under the `Pki` block in question, the external mapper is executed and the certificate is written to its standard input. The external mapper is expected to output a newline-separated list of user names. If the user name the user is trying to log in as is found in the list, the authentication succeeds; otherwise authentication using the certificate in question fails. The `ExternalMapper` keyword will override all `MapFile` keywords for the current (preceding) `Pki` keyword. If multiple `ExternalMapper` keywords are specified for a `Pki` block, the first one is used.

ExternalMapperTimeout

This keyword specifies an external mapper timeout (in seconds) for the preceding [Pki](#) keyword. If the server is unable to read the full output from an external mapper in the given period, the operation will fail and the external mapper program will be terminated. The default timeout is 10 seconds. If multiple `ExternalMapperTimeout` keywords are specified for a `Pki` block, the first one is used.

HostCA

The argument is of the format: `ca-certificate[,use_expired_crls=seconds]`

This keyword specifies the CA certificate (in binary or PEM (base-64) format) to be used when authenticating users using host-based authentication. The certificate received from the client must be issued by the specified CA and must contain a correct alternate name of type DNS (FQDN). If no CA certificates are specified in the configuration file, the protocol tries to do key exchange with ordinary public keys. Otherwise certificates are preferred. Multiple CAs are permitted, but only one per `HostCA` keyword.

If the additional comma-separated keyword `use_expired_crls` is given, expired CRLs will be allowed for this CA for the specified duration after the expiration, if newer CRLs are unavailable.



Caution

This feature allows a malicious party to force the use of expired CRLs if the said party can perform a denial-of-service attack against the CRL distribution point.

HostCAEkProvider

Specifies the external key provider for accessing CA certificates that are trusted for authenticating users using host-based authentication. The value is of the format `"provider:initstring"`. Currently, the only valid value for provider on z/OS is `zos-saf`. For the format of the `initstring`, see [ssh-externalkeys\(5\)](#).

HostCAEkProviderNoCRLs

This keyword is similar to `HostCAEkProvider`, but disables CRL checking for the CA certificates defined by `"provider:initstring"`. This option should be used for testing purposes only. In normal operations, it is highly recommended to always use CRLs.

HostCANoCRLs

This keyword is similar to `HostCA`, but disables CRL checking for the given ca-certificate.



Note

This option should be used for testing purposes only. In normal operations, it is highly recommended to always use CRLs.

LdapServers

CRLs are automatically retrieved from the CRL distribution point defined in the certificate to be checked if the point exists. Otherwise the comma-separated server list given by option `LdapServers` is used. If intermediate CA certificates are needed in certificate validity checking, this option must be used or retrieving the certificates will fail.

MapFile

This keyword specifies a mapping file for the preceding `Pki` keyword. Multiple mapping files are permitted per one `Pki` keyword. The mapping file format is described in [the section called “Mapping Files”](#).

OCSPResponderURL

Specifies the OCSP (Online Certificate Status Protocol) Responder service address in URL format, in case OCSP should be used instead of CRLs and the certificate itself does not contain a valid Authority Info Access extension with an OCSP Responder URL. Note that for the OCSP validation to succeed, both the end-entity certificate and the OCSP Responder certificate must be issued by the same CA.

If OCSP responder is defined globally or in a certificate, it is tried first; only if it fails, traditional CRL checking is tried, and if that fails, the certificate validation returns a failure.

PidFile

Specifies the file where the process ID of `ssh-certd` is written. Special values for this option are none and default.

none means no `PidFile` is created.

default means `/opt/tectia/var/run/sshd2_22.pid` for `sshd2` program, `/opt/tectia/var/run/ssh_certd_listener.pid` for `ssh_certd` program.

If the option is not specified, value none is assumed.

This option will be deprecated in the future release.

Pki

The argument is of the format: `ca-certificate[,use_expired_crls=seconds]`

This keyword enables user authentication using certificates. `ca-certificate` must be a path to a X.509 certificate in binary format. This keyword must be followed by one or more `MapFile` keywords.

The validity of a received certificate is checked separately using each of the defined `Pki` keywords in turn until they are exhausted (in which case the authentication fails), or a positive result is achieved. If the certificate is valid, the mapping files are examined to determine whether the certificate allows the user to log in (of course, the correct signature generated by a matching private key is always required in addition to everything else).

If the additional comma-separated keyword `use_expired_crls` is given, expired CRLs will be allowed for this CA for the specified duration after the expiration, if newer CRLs are unavailable.



Caution

This feature allows a malicious party to force the use of expired CRLs if the said party can perform a denial-of-service attack against the CRL distribution point.

PkiDisableCrls

If set to `yes`, this keyword disables CRL checking for the preceding `Pki` or `PkiEkProvider` keyword. The argument must be `yes` or `no`. The default is `no` (CRL checking is on).

Note that this disables only the CRL checking and only for the specific CA certificate in the `Pki` or `PkiEkProvider` parameter. OCSP checking is still done, but the result does not matter, since the fallback, the CRL, is implicitly valid when this option is active.



Note

This option should be used for testing purposes only. In normal operations, it is highly recommended to always use CRLs.

PkiEkProvider

This keyword can be used in place of the `Pki` keyword if the trusted CA keys are accessed from SAF. The value is of the format `"provider:initstring"`. Currently, the only valid value for `provider` is `zos-saf`. For the format of the `initstring`, see [ssh-externalkeys\(5\)](#).

QuietMode

Nothing is logged in the system log, except fatal errors. The argument must be `yes` or `no`. The default is `no`.

RandomSeedFile

Specifies the name of the random seed file.

SocksServer

With this option, `ssh-certd` can use a SOCKS4 or SOCKS5 server to connect to an LDAP server outside a firewall when making CRL queries. You can specify whether to use SOCKS5 with the option `UseSocks5`.

The argument syntax is described in [sshd2_config\(5\)](#).

SysLogFacility

Gives the facility code that is used when logging messages from **ssh-certd**. The possible values are: DAEMON, USER, AUTH, LOCAL0, LOCAL1, LOCAL2, LOCAL3, LOCAL4, LOCAL5, LOCAL6, LOCAL7. The default is AUTH.

UseSocks5

Uses SOCKS5 instead of SOCKS4 when connecting to a remote host. Note that you have to set **SocksServer** to a meaningful value. The argument must be yes or no. The default is no (i.e. use SOCKS4).

UseSSHD2ConfigFile

Instructs **ssh-certd** to read another configuration file in compatibility mode (the **sshd2** configuration options are allowed, but ignored).

VerboseMode

Causes **ssh-certd** to print debugging messages about its progress. This is helpful in debugging connection, authentication, and configuration problems. Also causes **ssh-certd** to not detach from the shell to the background.

WTORoutingCodes

Specifies the z/OS routing codes for WTO messages. Valid values for routing codes are from 1 to 128. The default is 1,11.

Mapping Files

When certificates are used in user authentication, one or more mapping files determine whether the user can log in to an account with a certificate. The mapping file must contain one or more lines in the following format:

```
account-id keyword arguments
```

keyword must be one of the following: `Email`, `EmailRegex`, `Subject`, `SerialAndIssuer`, or `SubjectRegex`.

`arguments` are different for each keyword. The following list describes each variation:

Email

Arguments: an e-mail address in standard format.

If the certificate contains the e-mail address as an alternate name, it is good for logging in as user `account-id`.

Subject

Arguments: a subject name in DN notation (LDAP style).

If the name matches the one in the certificate, the certificate is good for logging in as user `account-id`.

`SerialAndIssuer`

Arguments: a number and an issuer name in DN notation (LDAP style), separated by a whitespace.

If the issuer name and serial number match those in the certificate, the certificate is good for logging in as user `account-id`.

`EmailRegex`

Arguments: a regular expression (regex syntax: `ssh`, see [the section called “Regex syntax: `ssh`”](#)).

If it matches an alternate name (of the type `Email`) in the certificate, the certificate is good for logging in as user `account-id`. As a special feature, if `account-id` contains a string `%subst%`, it is replaced by the first parenthesized sub-string of the regular expression before comparing it with the account the user is trying to log into.

Note that by default, the whole email address or subject name does not need to be matched. The regular expression needs only to match to some part of the string to be matched. If the whole string is required to match, the regular expression should start with `$` and end with `^`, these match the start of the line and the end of the line, respectively.

`SubjectRegex`

Works identically to `EmailRegex`, except that it matches the regular expression to the canonical subject name in the received certificate.

Empty lines and lines beginning with `#` are ignored.

Example Mapping File

```
guest Email guest@ssh.com
guest Subject C=FI, O=Example Ltd., CN=Guest User
guest SerialAndIssuer 123 C=FI, O=Foo\, Ltd., CN=Test CA
%subst% EmailRegex ([a-z]+)@example\.com
%subst% SubjectRegex C=FI, O=Example, CN=([a-z]+)
```

The example `EmailRegex` permits in users with e-mail addresses with domain `example.com` and usernames that contain only letters, each user to the account that corresponds to the user name part of the e-mail address.

The example `SubjectRegex` lets in all users with fields `C=FI` and `O=Example` in the subject name if their `CN` field contains only letters and is the account name they are trying to log into.

Note also that all characters interpreted by the regular expression parser as special characters must be escaped with a backslash if they are a part of the subject name itself. This also means that the backslash in the `SerialAndIssuer` example would have to be escaped with another backslash if the same subject name was used in a `SubjectRegex` rule.

ssh-dummy-shell

ssh-dummy-shell -- Ultimately restricted shell

Synopsis

```
ssh-dummy-shell [-c sftp-shell]
```

Description

ssh-dummy-shell is used to provide access to systems where only file transfer functionality is permitted. Users with file-transfer-only access can have **ssh-dummy-shell** as their user shell. When executed without any parameters, the program waits for the user to press any key and exit. The only way to execute programs with **ssh-dummy-shell** is to give them as command-line parameters with the **-c** option. Even then, **sft-server-g3** is the only allowed command.

Options

-c command

The parameter is executed as a shell command. Only the **sftp-server** command is allowed. Any other command causes **ssh-dummy-shell** to exit immediately.

Return Status

ssh-dummy-shell returns the return value of the given command. If no command is given, 0 will be returned on exit.

Files

`/opt/tectia/etc/ssh_dummy_shell.out`

Contains the message that is shown to the user when **ssh-dummy-shell** is executed without any parameters.

ssh-externalkeys

ssh-externalkeys -- Using external keys with Tectia Server for IBM z/OS

Description

This document contains general information about using external keys with Tectia Server for IBM z/OS.

Using External Keys

For applications capable of using external keys, two strings need to be specified: the provider name and the initialization string for the provider. These strings can be given on the command line or in a configuration file, depending on the application. The following section describes the different providers available in more detail.

The provider name and/or the initialization string may be defined in the following configuration attributes and keywords:

In `ssh-broker-config.xml`:

```
cert-validation/key-store[@type="provider",init="initstring"]
known-hosts/key-store[@type="provider",init="initstring"]
key-stores/key-store[@type="provider",init="initstring"]
```

In `sshd2_config`:

```
AuthorizationEkProvider="provider:initstring"
HostKeyEkInitString="initstring"
HostKeyEkProvider="provider"
```

In `ssh_certd_config`:

```
HostCAEkProvider="provider:initstring"
HostCAEkProviderNoCRLs="provider:initstring"
PkIEkProvider="provider:initstring"
```

External Key Providers

`zos-saf`

The `zos-saf` provider is used for accessing keys stored in the IBM z/OS System Authorization Facility (SAF).

The initialization string for the `zos-saf` provider specifies the key(s) to be used and it has the following components:

```
{KEYS( [ ID(xxx) ]RING(xxx) [ LABEL(xxx) | DEFAULT ] )}...
```

`KEYS(. . .)` may repeat. The sub-attributes are:

- `ID` - A SAF user ID signifying the owner of the key ring. If missing, the current user's ID is used.
- `RING` - Key ring name. Mandatory.
- `LABEL` - The SAF key label. If missing, and `DEFAULT` is missing, use all the keys in the key ring.
- `DEFAULT` - Use the key that is marked as the default key on the key ring. Do not specify together with `LABEL`.

Values must be written in single quotation marks if they contain single quotation marks or parenthesis.

The initialization string specified with the `HostKeyEkInitString` keyword of `sshd2_config` must point to a single private key. If the key ring contains several keys, `LABEL` must be used to distinguish between the keys.

When using a trusted key provider and the Tectia Certificate Validator, specify `KEYS` variables that include all the CA certificates needed, for example:

```
PkiEkProvider="zos-saf"
PkiEkInitString="KEYS(RING(Trusted.CAs) LABEL('Primary CA'))
KEYS(ID(SSHTEST) RING(Internal.CAs))"
```

The `key-store[@init]` attribute of `ssh-broker-config.xml` and the `AuthorizationEkProvider` keyword of `sshd2_config` can contain special strings in the key specification that are mapped according the following list:

- `%U` = user name
- `%IU` = user ID
- `%IG` = user group ID
- `%UU` = user name in upper case (*AuthorizationEkProvider only*)
- `%UL` = user name in lower case (*AuthorizationEkProvider only*)

sshd-check-conf

sshd-check-conf -- checks what your configuration allows or denies based on the incoming user name and/or host name

Synopsis

```
sshd-check-conf [-d debug_level] [-v] [-V] [-h] [-f config_file] [[user@]host...]
```

Description

sshd-check-conf checks how **sshd2** will react to an incoming user, based on the user name and the remote host name given as parameters. Currently, the parameters **AllowHosts**, **DenyHosts**, **AllowSHosts**, **DenySHosts**, **AllowUsers**, **DenyUsers**, **AllowGroups**, **DenyGroups**, **ChRootUsers**, **ChRootGroups**, **AllowTcpForwardingForUsers**, **DenyTcpForwardingForUsers**, **AllowTcpForwardingForGroups**, and **DenyTcpForwardingForGroups** are checked.

Options

The following options are available:

-d *debug_level_spec*

Debug mode. The debugging level is either a number or a comma-separated list of assignments of the format *ModulePattern=debug_level*, for example "**=10,sshd2=2*".

-v

Enables verbose mode. Displays verbose debugging messages. Equivalent to **-d 2**.

-V

Displays version string.

-h

Displays a short help on command-line options.

-f *configuration_file*

Specifies the name of the configuration file. The default is */opt/tectia/etc/sshd2_config* or *\$HOME/.ssh2/sshd2_config*, depending on who is running the program, root or normal user.

Behavior

Any non-options given on the command line will be regarded as [user@]host patterns (that is, the user part is optional). If the host part is a valid IP address, it is looked up from DNS. Otherwise it is interpreted as a host name and the corresponding IP addresses will be queried from DNS.

You can specify multiple patterns on the command line.

If no patterns are specified on the command line, **sshd-check-conf** will go into interactive mode where the patterns can be given one at a time and they will be checked.

You may also specify one command in interactive mode, "**dump**". This command dumps the configuration (with subconfigurations amended) for the previous pattern.

Examples

```
% sshd-check-conf -f /opt/tectia/etc/sshd2_config testuser@example.com
% sshd-check-conf -f /opt/tectia/etc/sshd2_config user1@example.org user2@example.com
% sshd-check-conf
```

sshd2

sshd2 -- Secure Shell server daemon on z/OS

Synopsis

```
sshd2 [-d debug_level_spec] [-D debug_level_spec] [-f config_file] [-h host_key_file] [-o options]
[-4|-6] [-p port] [-F] [-v] [-V] [-g login_grace_time] [-i] [-q]
```

Description

sshd2 (Secure Shell Daemon) is the server counterpart of **sshg3**. Together, these two programs replace and extend the services rlogin and rsh, and provide secure encrypted communication channels between two hosts connected over an unsecured network. They are intended to be as easy to install and use as possible.

sshd2 can be started either using a started task or manually from USS. It forks a new daemon for each incoming connection. The forked daemons handle key exchange, encryption, authentication, command execution, and data exchange.

sshd2 can be configured using command-line options or a configuration file. Command-line options override values specified in the configuration file. **sshd2** reads configuration data from `/opt/tectia/etc/sshd2_config` (or the file specified with `-f` on the command line).

Subconfiguration files can also be specified in the main configuration file.

Start **sshd2** as a started task as follows:

```
==> s SSHD2
```

The started task takes modify commands as follows:

```
==> f SSHD2 ,<command>
```

The following modify commands are supported:

debug *debug_level*

Set the debug level of the running server.

stop

Stop the server. Existing connections are killed.

restart

Restart the server. Existing connections will stay open until they are disconnected. If you have made configuration changes, existing connections will continue to use the old configuration settings while new connections will use the reconfigured settings.

Options:

force

Kill all existing connections and restart the server.

version

Query the version of the server.

The **sshd2** command-line options (described in detail in the following section) can be given as an OPTS parameter on the **sshd2** "start". For example, configuration file options are entered in the following format (where *keyword* is a configuration file keyword):

```
====> S SSHD2,OPTS=' -o<keyword>=<value> '
```

Under USS you can start **sshd2** manually as the **sshd2** user with the following command:

```
> /opt/tectia/sbin/sshd2
```

Options

The following options are available:

-d *debug_level_spec*

Runs the server in one-shot debug mode. The server process accepts only one connection and exits after the connection has disconnected. The server sends verbose debug output to **STDERR**. The debugging level is either a number, or a comma-separated list of assignments of the format **ModulePattern=debug_level**, for example **"*=10,sshd2=2"**. This should be the first argument on the command line.

-D *debug_level_spec*

Runs the server in continuous debug mode. As **-d**, but the server accepts several connections and needs to be stopped manually when you want to finish the debugging.

-f *configuration_file*

Specifies the name of the configuration file. The default is **/opt/tectia/etc/sshd2_config**.



Note

If this option is specified, the default configuration file is not read at all.

-h *host_key_file*

Specifies the file from which the host key is read (default **/opt/tectia/etc/hostkey**).

-o 'option'

Can be used to give options in the format used in the configuration files. This is useful for specifying options for which there is no separate command-line flag. The option has the same format as a line in the configuration file. Comment lines are not accepted. Where applicable, the egrep regex format is used.

-4

Specifies that **sshd2** will only use IPv4 addresses. IPv6 addresses from **ListenAddress** configuration statements, name resolution and port forwarding will be ignored.

-6

Specifies that **sshd2** will only use IPv6 addresses. IPv4 addresses from **ListenAddress** configuration statements, name resolution and port forwarding will be ignored.

-p *port*

Specifies the port on which the server listens for connections. Note that when -p is specified, the server will ignore any defined **ListenAddress** and **AddressFamily** configuration statements and listen on all available IPv4 and IPv6 interfaces. The -p option is intended for testing - for greater control use the **sshd2_config** configuration file. The value of the **Port** configuration variable can be specified on the command line with the -o option. However, explicit port numbers on **ListenAddress** statements will override -o**Port**.

-F

Disables daemon mode. The server does not spawn a new process to the background.

-v

Enables verbose mode. Displays verbose debugging messages. Equivalent to -d 2. This option can also be specified in the configuration file with the keyword **VerboseMode**.

-V

Displays version string.

-q

Quiet mode. Nothing is sent to the system log. Normally the beginning, authentication, and termination of each connection is logged. This option can also be specified in the configuration file with the keyword **QuietMode**.

-g *login_grace_time*

Gives the grace time for clients to authenticate themselves (the default is 600 seconds). If the client fails to authenticate the user within this many seconds, the server disconnects and exits. The value zero indicates no limit.

-i

Specifies that **sshd2** is invoked via **inetd**.

Configuration File

sshd2 reads configuration data from `/opt/tectia/etc/sshd2_config` (or the file specified with -f on the command line). The file contains keyword-value pairs, one per line. Lines starting with '#' and empty lines are interpreted as comments.

For the format of **sshd2_config**, see [sshd2_config\(5\)](#).

Login Process

When a user logs in successfully, **sshd2** does the following:

1. Changes process to run with normal user privileges.
2. Sets up the basic environment.
3. Changes to the user's home directory.
4. Runs the user's shell or command.

Files

`/opt/tectia/etc/sshd2_config`

Contains configuration data for **sshd2**. This file should be writable by `root` only, but it is recommended (though not necessary) that it be world-readable.

`/opt/tectia/etc/hostkey`

Contains the private part of the host key. This file is normally created automatically by `"make install"`, but can also be created manually using **ssh-keygen-g3**. This file contains vital cryptographic information and may only be read or modified by `root`.

`/opt/tectia/etc/hostkey.pub`

Contains the public part of the host key. This file is normally created automatically by `"make install"`, but can also be created manually. This file should be world-readable but must not be writable by anyone but `root`. If it does not match the private counterpart, clients probably get confused about the server's identity.

`/opt/tectia/etc/random_seed`

This file contains a seed for the random number generator. This file must not be accessible by anyone but `root`.

`$HOME/.ssh2/authorization`

Contains information on how the server will verify the identity of a user. For more information, see [Section 5.6.2](#).

`$HOME/.hushlogin`

If this file exists, **sshd2** will not print information during login. (This is normally the user's last login time, message of the day and mail check.)

`/etc/nologin`

If this file exists, **sshd2** refuses to let anyone except `root` log in. The contents of the file are displayed to anyone trying to log in. The file should be world-readable.

/etc/nologin_<hostname>

As above, but the file name is constructed from the name of the host. Check the output of `hostname` to see which name you should use in the file name. This functionality is supposed to be used by clustered machines (which share `/etc`).

\$HOME/.rhosts

This file contains host-username pairs, separated by a white space, one per line. The given user is permitted to log in from the given host without a password. The same file is used by **rlogind** and **rshd**. **sshd2** differs from **rlogind** and **rshd** in that it requires public host-key authentication from the ssh2 server running on this host in addition to validating the host name retrieved from domain name servers. The file must be writable only by the user; it is recommended that it is not accessible by others.

It is also possible to use netgroups in the file. Either host or user name may be of the form `+$groupname` to specify all hosts or all users in the group.

\$HOME/.shosts

For **sshg3**, this file is exactly the same as for `.rhosts`. However, this file is not used by **rlogin** and **rshd**, so using this permits access using **sshg3** only.

/etc/hosts.equiv

This file is used during `.rhosts` authentication. In its simplest form, this file contains host names, one per line. Users on those hosts are permitted to log in without a password, provided they have the same user name on both machines. The host name may also be followed by a user name; such users are permitted to log in as any user on this machine (except `root`). Additionally, the syntax `+$group` can be used to specify netgroups. Negated entries start with `'-'`.

If the client host/user is successfully matched in this file, login is automatically permitted provided the client and server user names are the same. Additionally, successful host-based authentication is normally required. This file must be writable only by `root`; it is recommended that it be world-readable.

**Caution**

It is almost never a good idea to use user names in `hosts.equiv`. Note that it really means that the named user(s) can log in as anybody, including `bin`, `daemon`, `adm`, and other accounts that own critical binaries and directories. Using a user name practically grants the user root access. The only valid use for user names should be in negative entries. Note that this warning also applies to **rsh/rlogin**.

/etc/shosts.equiv

This is processed exactly as `/etc/hosts.equiv`. However, this file is not used by **rlogin** and **rshd**, so using this permits access using **sshg3** only.

\$HOME/.ssh2/knownhosts/xxxxyyyy.pub

These are the public host keys of hosts that a user wants to log in from using host-based authentication (equivalent to `RhostsRSAAuthentication` in `ssh1`). Also, users have to set up their `$HOME/.shosts`

(only used by ssh) or `$HOME/.rhosts` files (insecure, as it is used by the `r*` commands also). If the user name is the same on both hosts, it is adequate to put the public host key to `/opt/tectia/etc/knownhosts` and add the host name to `/etc/shosts.equiv` (or `/etc/hosts.equiv`).

`xxxx` denotes the host name (FQDN) and `yyyy` denotes the public-key algorithm of the key.

For example, if `zappa.foo.fi`'s host-key algorithm is `ssh-dss`, the host key is contained in the file `zappa.foo.fi.ssh-dss.pub` in the `knownhosts` directory.

Possible names for public-key algorithms are `ssh-dss` and `ssh-rsa`.

`/opt/tectia/etc/knownhosts/xxxxyyyy.pub`

As above, but system-wide. These settings can be overridden by the user by putting a file with the same name to the `$HOME/.ssh2/knownhosts` directory.

sshd2_config

sshd2_config -- configuration file format for sshd2 on z/OS

Configuration File

sshd2 reads configuration data from `/opt/tectia/etc/sshd2_config` (or the file specified with `-f` on the command line). The file contains keyword-value pairs, one per line.

A configuration file can begin with "metaconfiguration" information, that is, information configuring the configuration language itself.

If the configuration file starts with a line matching the following egrep-style regular expression:

```
#.*VERSION[ \t\f]+[0-9]+.[0-9]+
```

it is interpreted as the version of the configuration style. If this kind of line is not found, the version is considered to be "1.0".

The version string can be followed by one or more metaconfiguration parameters. The lines have to start with '#', and they have to match the following egrep-style regular expression:

```
#[# \t]+[A-Z0-9]+[ \t]+.*
```

The parsing of metaconfiguration directives stops with the first non-recognized line.

Version 1.1 and later recognize the following parameter:

REGEX-SYNTAX

This denotes the regex (regular expression) syntax used to parse the configuration file in question. The regex syntax is used in parsing the labels, lists, and so on, and when matching something with the regex patterns specified in the configuration file.

The value can be `egrep`, `ssh`, `zsh_fileglob` or `traditional` (the arguments are not case-sensitive). `zsh_fileglob` and `traditional` are synonymous.

Subconfiguration files can be specified in the main configuration file, see [HostSpecificConfig](#) and [User-SpecificConfig](#).

Note

If changes are made in the main configuration file, **sshd2** will have to be restarted as instructed in [Section 3.1.3](#).

In the configuration file, empty lines and lines starting with '#' are ignored as comments.

Otherwise a line is of the format 'keyword arguments'. Note that it is possible to enclose arguments in quotes, and use the standard C convention.



Note

The keywords are not case-sensitive but the arguments are case-sensitive.

The possible keywords and their meanings are as follows :

AddressFamily

This keyword specifies the TCP/IP address families that **sshd2** should use when listening for SSH connections and connecting to tunneled ports. The value may be `inet` for IPv4, `inet6` for IPv6, or `any`, which means that **sshd2** will listen on both protocols and connect to an IPv4 or IPv6 port, whichever it finds first. The default value is `inet`.

AllowAgentForwarding or **ForwardAgent**

Specifies whether agent forwarding is permitted. This parameter is implemented mainly for completeness. Usually, you should allow users to freely forward agent connections. The argument must be `yes` or `no`. The default is `yes`.

AllowedAuthentications

This keyword specifies the authentication methods that are allowed. Known authentication methods are: `keyboard-interactive`, `password`, and `publickey`. The default is "`publickey, password`". The order of the listed authentication methods is important, as the first method will be used that matches the methods the client is proposing.

With **RequiredAuthentications**, the system administrator can force the users to complete several authentications before they are considered authenticated.

AllowGroups

This keyword can be followed by any number of group name patterns, separated by commas. If specified, login is allowed only if one of the groups the user belongs to matches one of the patterns. Patterns are matched using the egrep syntax (see [sshregex\(1\)](#)), or the syntax specified in the metaconfiguration header of the configuration file. You can use the comma character (,) in the patterns by escaping it with backslash (\). By default, all groups are allowed to log in.

AllowHosts

This keyword can be followed by any number of host name patterns, separated by commas. If specified, login is allowed only from hosts whose name matches one of the patterns. Patterns are matched using the egrep syntax (see [sshregex\(1\)](#)), or the syntax specified in the metaconfiguration section of the configuration file. If you want the pattern to be matched with the host's IP address only (ignoring the canonical host name), prefix your pattern with "\i". You can also use subnet masks (e.g 127.0.0.0/8) by prefixing

the pattern with "\m". DNS is used to map the client's host name into a canonical host name. If the name cannot be mapped, the IP address is used as the host name. By default, all hosts are allowed to connect.

AllowSHosts

This keyword can be followed by any number of host name patterns, separated by commas, same as the option `AllowHosts`. The entries in `.shosts`, `.rhosts`, `/etc/hosts.equiv` and `/etc/shosts.equiv` are ignored if they do not match one of the patterns given here (if there are any).

AllowTcpForwarding

Specifies whether TCP forwarding is permitted.



Note

Disabling TCP forwarding does not improve security at all unless you deny the user shell access at the same time (see [ssh-dummy-shell\(1\)](#)): users that have a shell can always install their own forwarders.

The argument must be `yes` or `no`. The default is `yes`.

AllowTcpForwardingForGroups

The syntax is the same as in `AllowGroups`, but instead of login, this controls the ability to forward ports in remote or local forwarding. See the security note under option [AllowTcpForwarding](#).

AllowTcpForwardingForUsers

The syntax is the same as in `AllowUsers`, but instead of login, this controls the ability to forward ports in remote or local forwarding. See the security note under option [AllowTcpForwarding](#).

AllowUsers

This option can be followed by any number of patterns of the form `user` or `user@host`, separated by commas. The details explained under option `AllowHosts` apply accordingly. By default, all users are allowed to log in.

Note that all the other login authentication steps must still be successfully completed. `AllowUsers` and `DenyUsers` are additional restrictions.

AuthInteractiveFailureTimeout

Specifies the delay in seconds of the server after a failed attempt to log in using keyboard-interactive and password authentication. The default is 2.

AuthKbdInt.NumOptional

Specifies how many optional submethods must be passed before the authentication is considered a success (note that all required submethods must always be passed). See `AuthKbdInt.Optional` for specifying optional submethods, and `AuthKbdInt.Required` for required submethods. The default is 0, although if no required submethods are specified, the client must always pass at least one optional submethod.

AuthKbdInt.Optional

Specifies the optional submethods keyboard-interactive will use. Currently only the password and plugin submethods are supported on z/OS. `AuthKbdInt.NumOptional` specifies how many optional submethods must be passed. The `keyboard-interactive` authentication method is considered a success when the specified number of optional submethods and all required submethods are passed. The `plugin` submethod is special. It can be used if a system administrator wants to create a new authentication method. See also `AuthKbdInt.NumOptional` and `AuthKbdInt.Required`.

AuthKbdInt.Plugin

Specify this to point to a program that is used by the `plugin` submethod in `keyboard-interactive`. `sshd2` converses with this program using a line-based protocol, so it is easy to implement it, for example as a shell script. If the `plugin` submethod is used, and this is not set, or the specified program does not exist or cannot be run, the submethod will fail, which may cause the whole user authentication to fail. This is not set by default. More information about the protocol can be found in the distribution package. `RFC.kbdint_plugin_protocol` has a description of the protocol used and an example script is called `kbdint_plugin_example.sh`. Note that the program is run with the privileges of the `sshd2` process, typically root, so be careful.

AuthKbdInt.Required

Specifies the required submethods that must be passed before the `keyboard-interactive` authentication method can succeed. See `AuthKbdInt.Optional`.

AuthKbdInt.Retries

Specifies how many times the user can retry `keyboard-interactive`. The default is 3.

AuthorizationEkProvider

This keyword specifies the external key provider for accessing external public keys and certificates used for user public-key authentication. The value is of the format "provider:initstring". Currently, the only valid value for provider on z/OS is `zos-saf`. For the format of the `initstring`, see [ssh-externalkeys\(5\)](#).

AuthorizationEkInitStringMapper

This keyword specifies a path to an external program (for example, `"/path/to/mapper.sh"`) that can be used for generating the initialization string used in public-key authentication with external keys. The usage of the mapper program should be the following:

```
mapper.sh username "initstring"
```

`username` is the name of the user found in the certificate, and `initstring` is the initialization string as it is given in the `AuthorizationEkProvider` keyword. The program should print the modified initialization string into standard output.

AuthorizationEkInitStringMapperTimeout

This keyword specifies a timeout (in seconds) for the `AuthorizationEkInitStringMapper`. If the server is unable to read the full output from the mapper in the given period, the operation will fail and the mapper program will be terminated. The default timeout is 10 seconds.

AuthorizationFile

Specifies the name of the user's authorization file. The default is `$HOME/.ssh2/authorization`.

AuthorizedKeysFile

Specifies the name of the user's authorized keys file. This is given as a pattern string which is expanded by `sshd2`.

`%D` is the user's home directory,
`%U` is the user's login name,
`%UU` is the user's login name in upper case,
`%UL` is the user's login name in lower case,
`%IU` is the user's user ID (uid),
`%IG` is the user's group ID (gid).

The file is a legacy-format file containing multiple public keys so that each line holds a single public key. Keys are in the ssh1/openssh public key format.

This option is disabled by default.

The public-key option `from="host"` is equivalent to `allow-from="host"` and `from="!host"` is equivalent to `deny-from="host"`. Also the `$SSH_ORIGINAL_COMMAND` is equivalent to `$SSH2_ORIGINAL_COMMAND`. Note that the public-key option `permitopen="host:port"` is not supported, please see the [ForwardACL](#) configuration option to achieve a similar setup.

AuthPassword.ChangePlugin

Set this to the path of the password change plug-in, typically `ssh-passwd-plugin` (if you have the binary packages or you have configured the source with `--with-passwd-plugin`). This allows the password

to be changed during the authentication phase, instead of using a system's **passwd** command to do it. This replaces the actual session, requiring the user to log in again. This option is also used by the **password** submethod of **keyboard-interactive**. By default this is not set.

AuthPublicKey.Algorithms

Specifies the public key signature algorithms to be used in client authentication.

The supported algorithms are `rsa-sha2-256`, `rsa-sha2-512`, `ssh-dss`, `ssh-dss-sha224@ssh.com`, `ssh-dss-sha256@ssh.com`, `ssh-dss-sha384@ssh.com`, `ssh-dss-sha512@ssh.com`, `x509v3-sign-dss`, `x509v3-sign-dss-sha224@ssh.com`, `x509v3-sign-dss-sha256@ssh.com`, `x509v3-sign-dss-sha384@ssh.com`, `x509v3-sign-dss-sha512@ssh.com`, `x509v3-ssh-dss`, `ssh-rsa`, `ssh-rsa-sha224@ssh.com`, `ssh-rsa-sha256@ssh.com`, `ssh-rsa-sha384@ssh.com`, `ssh-rsa-sha512@ssh.com`, `x509v3-sign-rsa`, `x509v3-sign-rsa-sha224@ssh.com`, `x509v3-sign-rsa-sha256@ssh.com`, `x509v3-sign-rsa-sha384@ssh.com`, `x509v3-sign-rsa-sha512@ssh.com`, `x509v3-ssh-rsa`, `x509v3-rsa2048-sha256`, `ecdsa-sha2-nistp256`, `ecdsa-sha2-nistp384`, `ecdsa-sha2-nistp521`, `x509v3-ecdsa-sha2-nistp256`, `x509v3-ecdsa-sha2-nistp384`, and `x509v3-ecdsa-sha2-nistp521`.

Multiple public key signature algorithms can be specified as a comma-separated list. Special values for this option are:

- `Any` - includes all supported algorithms.
- `AnyStd` - includes algorithms from the IETF SSH standards (`ecdsa-sha2-nistp256`, `ecdsa-sha2-nistp384`, `ecdsa-sha2-nistp521`, `x509v3-ecdsa-sha2-nistp256`, `x509v3-ecdsa-sha2-nistp384`, `x509v3-ecdsa-sha2-nistp521`, `x509v3-sign-dss`, `x509v3-sign-rsa`, `ssh-dss`, `ssh-rsa`).
- `AnyPublicKeyAlgorithm` - the same as `Any`.
- `AnyStdPublicKeyAlgorithm` - the same as `AnyStd`.

The default list is: `rsa-sha2-256`, `rsa-sha2-512`, `ecdsa-sha2-nistp256`, `ecdsa-sha2-nistp384`, `ecdsa-sha2-nistp521`, `x509v3-ecdsa-sha2-nistp256`, `x509v3-ecdsa-sha2-nistp384`, `x509v3-ecdsa-sha2-nistp521`, `ssh-rsa`, `ssh-rsa-sha256@ssh.com`, `ssh-dss`, `ssh-dss-sha256@ssh.com`, `x509v3-sign-dss`, `x509v3-sign-dss-sha256@ssh.com`, `x509v3-sign-rsa`, and `x509v3-sign-rsa-sha256@ssh.com`.

AuthPublicKey.Cert.Required

This keyword specifies whether the client must present a user certificate during user authentication. If this option is set to `yes`, also the [AllowedAuthentications](#) keyword must contain the value `publickey`. If the server does not receive a certificate, the authentication fails. The argument must be `yes` or `no`. The default is `no`.

AuthPublicKey.Cert.ValidationMethods

This keyword specifies the method used for certificate validation during user public-key authentication. Its value can be `tectia` or `saf`, or both (`saf`, `tectia`). The default is `tectia`.

If `saf` is specified, RACF/SAF is used for validating user certificates. The user certificates must exist in a trusted key ring defined by the [AuthorizationEkProvider](#) keyword. Note that when only SAF validation is used, the certificate validity period and revocation status are not checked.

If `tectia` is specified (or the keyword is missing from the configuration), the Tectia Certificate Validator ([ssh-certd](#)) is used for validating user certificates. The user certificates must be issued by a trusted certification authority defined in the [Pki](#) or [PkiEkProvider](#) keyword of `ssh_certd_config`.

If both values are specified, the user certificate is read from RACF/SAF and the user name is taken from the certificate. After that the Tectia validation is performed. The CA certificate of the issuing certification authority must exist in a trusted key ring defined by the [PkiEkProvider](#) keyword of `ssh_certd_config`.

AuthPublicKey.MaxValue

Specifies the maximum size of a public key that can be used to log in. Value 0 disables the check. The default is 0 (disabled).

AuthPublicKey.MinValue

Specifies the minimum size of a public key that can be used to log in. Value 0 disables the check. The default is 0 (disabled).

BannerMessageFile

Specifies the path to the message that is sent to the client before authentication. Note, however, that the client is not obliged to show this message.

The default is `/opt/tectia/etc/ssh_banner_message` (if defined).

CertdListenerPath

Specifies the path where the server tries to connect to the Certificate Validator. Mainly intended for debugging and testing. The default is `/opt/tectia/var/run/ssh-certd-listener`.

CheckMail

Makes `sshd2` print information on whether there is new mail or not when a user logs in interactively. (On some systems this information is also printed by the shell, `/etc/profile`, or equivalent.) The argument must be `yes` or `no`. The default is `yes`.

ChRootGroups

This option works like `ChRootUsers`, except that it can be used to list groups instead of single users. Groups are listed on the server in `/etc/group`. Follows the logic of [DenyGroups](#).

ChRootUsers

`sshd2` gives all users listed here a chrooted environment (e.g. `/home`). This stops users from accessing sensitive information on the server's file system. Users are defined on the server in `/etc/group`. More than one group can be listed, separated by a comma. This is not a default option. The logic follows that of [DenyUsers](#).

Ciphers

Specifies the ciphers to use for encrypting the session. The supported ciphers are `aes128-ctr`, `aes192-ctr`, `aes256-ctr`, `aes128-gcm@openssh.com`, `aes256-gcm@openssh.com`, `aes128-cbc`, `aes192-cbc`, `aes256-cbc`, `3des-cbc` and `rijndael-cbc@ssh.com`.

Multiple ciphers can be specified as a comma-separated list. Special values for this option are:

- `Any` - includes all supported ciphers
- `AnyStd` - includes ciphers from the IETF SSH standards (`aes128-ctr`, `aes192-ctr`, `aes256-ctr`, `aes128-gcm@openssh.com`, `aes256-gcm@openssh.com`, `aes128-cbc`, `aes192-cbc`, `aes256-cbc` plus `3des-cbc`).
- `AnyCipher` - the same as `Any`.
- `AnyStdCipher` - the same as `AnyStd`.

The default list is `aes128-ctr`, `aes192-ctr`, `aes256-ctr`, `aes128-gcm@openssh.com`, `aes256-gcm@openssh.com`, `aes128-cbc`, `aes192-cbc`, `aes256-cbc` and `3des-cbc`.

DenyGroups

This keyword can be followed by any number of group name patterns, separated by commas. If specified, login is denied if one of the groups the user belongs to matches one of the patterns. Otherwise, this option is parsed and matched identically to [AllowGroups](#). By default, all users are allowed to log in.

If a user's group matches a pattern in both `DenyGroups` and `AllowGroups`, login is denied.

Note that all other authentication steps must still be successfully completed. `AllowGroups` and `DenyGroups` are additional restrictions and never increase the tolerance.

DenyHosts

This keyword can be followed by any number of host name patterns, separated by commas. If specified, login is denied from hosts whose names match any of the patterns. See [AllowHosts](#).

DenySHosts

This keyword can be followed by any number of host name patterns, separated by commas, just as the option **DenyHosts**. The entries in `.shosts`, `.rhosts`, `/etc/hosts.equiv` and `/etc/shosts.equiv` are ignored if they match one of the patterns given here (if there are any). See [AllowSHosts](#).

DenyTcpForwardingForGroups

The syntax is the same as in **DenyGroups**, but instead of login, this controls the ability to forward ports, in remote or local forwarding. See the security note under option [AllowTcpForwarding](#).

DenyTcpForwardingForUsers

The syntax is the same as in **DenyUsers**, but instead of login, this controls the ability to forward ports, in remote or local forwarding. See the security note under option [AllowTcpForwarding](#).

DenyUsers

This is the opposite of [AllowUsers](#) and works accordingly. If a user's name matches a pattern in both **DenyUsers** and **AllowUsers**, login is denied.

Note that all other authentication steps must still be successfully completed. **AllowUsers** and **DenyUsers** are additional restrictions.

DisableVersionFallback

Selects whether to disable fallback compatibility code for earlier, or otherwise incompatible versions of software. Do not disable this unless you know what you are doing. The argument must be yes or no. The default is no.

ExternalAuthorizationProgram

If set, this program is run to verify whether the user is authorized to log in. **sshd2** converses with this program using a line-based protocol, so it is easy to implement for example as a shell script. If this is set, and the program does not exist or cannot be run, authorization (user login) will be denied. This will not be set by default. More information about the protocol can be found in the distribution package, `RFC.authorization_program_protocol` has a description of the protocol used and an example script is called `ext_authorization_example.sh`. Note that the program is run with the privileges of the **sshd2** process, typically root, so be careful.

ForwardACL

With this option, you can have more fine-grained control over what the client is allowed to forward and where. The format for this option is

```
(allow|deny) (local|remote) user-pat forward-pat [originator-pat]
```

`user-pat` will be used to match the client user, as specified under the option [UserSpecificConfig](#).

`forward-pat` is a pattern of format `host-id[%port]`. This has different interpretations depending on whether the ACL is specified for local or remote forwardings. For local forwardings, `host-id` will match with target host of the forwarding, as specified under option [AllowHosts](#). `port` will match the target port. Also, if the client sent a host name, the IP is looked up from the DNS, which will be used to match the pattern. For remote forwardings, where the forwarding target is not known (the client handles that end of the connection), this will be used to match the listen address specified by the user (and as such is not as usable as with local forwardings). `port` will match the port the server is supposed to be listening to with this forwarding.

With local forwards, `originator-pat` will match the originator address that the client has reported. Remember, if you do not administer the client machine, or the users on that machine have shell access, they may use a modified copy of `ssh` that can be used to lie about the originator address. Also, with NATs (Network Address Translation) the originator address will not be meaningful (it will probably be an internal network address). Therefore you should not rely on the originator address with local forwardings, unless you know exactly what you are doing. With remote forwardings, on the other hand, `originator-pat` will match with the IP address of the host connecting to the forwarded port. This will be valid information, as it is the server checking the information.

If you specify any `allow` directives, all forwardings in that class (local or remote) not specifically allowed will be denied. (Note that local and remote forwardings are separate in this respect; e.g. if you have one "allow remote" definition, local forwardings are still allowed, pending other restrictions.) If a forwarding matches both `allow` and `deny` directives, the forwarding will be denied. Also, if you have specified any of the options `{Allow,Deny}TcpForwardingFor{Users,Groups}` or `AllowTcpForwarding`, and the forwarding for the user is disabled with those, an `allow` directive will not re-enable the forwarding for the user. Forwarding is enabled by default.

ForwardAgent

See [AllowAgentForwarding](#) or [ForwardAgent](#).

HostCertificateFile

This keyword works very much like [PublicHostKeyFile](#), except that the file is assumed to contain an X.509 certificate in binary format. The keyword must be paired with a corresponding `HostKeyFile` option. If multiple certificates with the same public-key type (DSA, ECDSA or RSA) are specified, only the first one is used.

HostIdMappingHostnames

A user certificate might contain a **HostIdMapping** field. That field is used by SAF to determine the local user name of the user. If the **HostIdMapping** field should be processed in Tectia Server for IBM z/OS, the `HostIdMappingHostnames` keyword can be used. It specifies the list of host names that the server recognizes. If the user certificate has the correct host name in the **HostIdMapping** host name field, the user name associated with that host name (specified in the certificate) is used. Note that if `HostIdMappingHostnames` is used, the Tectia certificate validation must be performed (the `AuthPublicKey.Cert.ValidationMethods` keyword must be set to `saf, tectia`).

HostKeyAlgorithms

Specifies the host key signature algorithm to be used in server authentication.

The supported algorithms are `rsa-sha2-256`, `rsa-sha2-512`, `ssh-dss`, `ssh-dss-sha224@ssh.com`, `ssh-dss-sha256@ssh.com`, `ssh-dss-sha384@ssh.com`, `ssh-dss-sha512@ssh.com`, `x509v3-sign-dss`, `x509v3-sign-dss-sha224@ssh.com`, `x509v3-sign-dss-sha256@ssh.com`, `x509v3-sign-dss-sha384@ssh.com`, `x509v3-sign-dss-sha512@ssh.com`, `ssh-ed25519`, `ssh-rsa`, `ssh-rsa-sha224@ssh.com`, `ssh-rsa-sha256@ssh.com`, `ssh-rsa-sha384@ssh.com`, `ssh-rsa-sha512@ssh.com`, `x509v3-sign-rsa`, `x509v3-sign-rsa-sha224@ssh.com`, `x509v3-sign-rsa-sha256@ssh.com`, `x509v3-sign-rsa-sha384@ssh.com`, `x509v3-sign-rsa-sha512@ssh.com`, `ecdsa-sha2-nistp256`, `ecdsa-sha2-nistp384`, `ecdsa-sha2-nistp521`, `x509v3-ecdsa-sha2-nistp256`, `x509v3-ecdsa-sha2-nistp384`, and `x509v3-ecdsa-sha2-nistp521`.

Multiple algorithms can be specified as a comma separated list. Special values for this option are:

- `Any` - includes all supported host key algorithms.
- `AnyStd` - includes host key algorithms from the IETF SSH standards (`ecdsa-sha2-nistp256`, `ecdsa-sha2-nistp384`, `ecdsa-sha2-nistp521`, `x509v3-ecdsa-sha2-nistp256`, `x509v3-ecdsa-sha2-nistp384`, `x509v3-ecdsa-sha2-nistp521`, `x509v3-sign-dss`, `x509v3-sign-rsa`, `ssh-dss`, `ssh-rsa`).
- `AnyHostKeyAlgorithm` - the same as `Any`.
- `AnyStdHostKeyAlgorithm` - the same as `AnyStd`.

The default list is `ecdsa-sha2-nistp521`, `ecdsa-sha2-nistp384`, `ecdsa-sha2-nistp256`, `rsa-sha2-256`, `rsa-sha2-512`, `x509v3-ecdsa-sha2-nistp256`, `x509v3-ecdsa-sha2-nistp384`, `x509v3-ecdsa-sha2-nistp521`, `ssh-rsa`, `ssh-rsa-sha256@ssh.com`, `ssh-dss`, `ssh-dss-sha256@ssh.com`, `x509v3-sign-dss`, `x509v3-sign-dss-sha256@ssh.com`, `x509v3-sign-rsa`, and `x509v3-sign-rsa-sha256@ssh.com`.

HostKeyFile

Specifies the file containing the private host key (default `/opt/tectia/etc/hostkey`). The directory should be readable only by root.

HostKeyEkInitString

Specifies the initialization string for the external host key provider. This is ignored when the keyword `HostKeyEkProvider` is not present. The key specification must define exactly one key. It must be a personal RSA key that contains both a private key and a certificate. See [ssh-externalkeys\(5\)](#) for details about specifying initialization strings.

HostKeyEkProvider

Specifies the external key provider for accessing the server host key. Currently, the only valid value on z/OS is `zos-saf`. See [ssh-externalkeys\(5\)](#) for details about specifying providers.

HostKey.Cert.Required

This keyword specifies whether the local server must present a host certificate to the remote client during server authentication.

If set to `yes`, a certificate must be defined either with the `HostCertificateFile` keyword or with the `HostKeyEkProvider` keyword.

If set to `no`, a certificate is not required. In this case, if the `HostKeyEkProvider` keyword specifies a certificate in SAF, only the public key found in the certificate is used (but `HostCertificateFile` is used normally, if defined).

If set to `optional`, both certificate and public key are used. In this case, if the `HostKeyEkProvider` keyword specifies a certificate in SAF, the certificate and the public key found in the certificate are used (but `HostCertificateFile` is used normally, if defined).

The argument must be `yes`, `no`, or `optional`. The default is `no`.

HostSpecificConfig

Specifies a subconfiguration file for `sshd2`. The syntax for this option is:

```
pattern subconfig-file
```

`pattern` is used to match the client host, as specified under option `AllowHosts`. The file `subconfig-file` is read, and configuration data is amended accordingly. The file is read before any actual protocol transactions begin, and you can specify most of the options allowed in the main configuration file. You can specify more than one subconfiguration file, in which case the patterns are matched and the files read in the specified order. Configuration option values defined later will either override or amend the previous value, depending on the option. The effect of redefining an option is described in the documentation for each option. For example, setting `ciphers` in the subconfiguration file will override the old value, but setting `AllowUsers` will amend the value. See [sshd2_subconfig\(5\)](#) for more thorough documentation on what you can set in this subconfiguration file.

See also option [UserSpecificConfig](#).

IdentityDispatchUsers

This keyword is used in conjunction with certificate authentication. It is followed by a user name pattern as in the `AllowUsers` keyword. If the login user name given by the client matches to the pattern, it is not used, but instead the user name is taken from the user certificate.

IdleTimeOut

Sets the idle timeout limit to time either in seconds (s or nothing after the number), in minutes (m), in hours (h), in days (d), or in weeks (w). If the connection has been idle (all channels) this long, the connection is closed. The default is 0 (zero), which disables idle timeouts.

KeepAlive

Specifies whether the system should send keepalive messages to the other side. If they are sent, a broken connection or crash of one of the machines will be properly noticed. However, this means that connections will die if the route is down temporarily, and this can be annoying in some situations. On the other hand, if keepalive messages are not sent, sessions may hang indefinitely on the server, leaving "ghost" users and consuming server resources.

The default is yes (to send keepalives), and the server will notice if the network goes down or the client host reboots. This avoids infinitely hanging sessions.

To disable keepalives, the value should be set to no in both the server and the client configuration files.

KEXs

Specifies the key exchange algorithm to be used. The supported algorithms are:

```
diffie-hellman-group1-sha1
diffie-hellman-group14-sha1
diffie-hellman-group14-sha256
diffie-hellman-group16-sha512
diffie-hellman-group18-sha512
diffie-hellman-group14-sha224@ssh.com
diffie-hellman-group14-sha256@ssh.com
diffie-hellman-group15-sha256@ssh.com
diffie-hellman-group15-sha384@ssh.com
diffie-hellman-group16-sha384@ssh.com
diffie-hellman-group16-sha512@ssh.com
diffie-hellman-group18-sha512@ssh.com
diffie-hellman-group-exchange-sha1
diffie-hellman-group-exchange-sha256
ecdh-sha2-nistp256
ecdh-sha2-nistp384
ecdh-sha2-nistp521
curve25519-sha256
curve25519-sha256@libssh.org
ecdh-nistp521-kyber1024-sha512@ssh.com
curve25519-frodokey1344-sha512@ssh.com
sntrup761x25519-sha512@openssh.com
```

```
mlkem768nistp256-sha256
mlkem1024nistp384-sha384
mlkem768x25519-sha256
```

Multiple KEXs can be specified as a comma-separated list. Special values for this option are:

- Any - includes all supported KEXs.
- AnyStd - includes the following KEXs from the IETF SSH standards: diffie-hellman-group14-sha1, diffie-hellman-group1-sha1, ecdh-sha2-nistp256, ecdh-sha2-nistp384, ecdh-sha2-nistp521.
- AnyKEX - the same as Any.
- AnyStdKEX - the same as AnyStd.

The default algorithms are ecdh-sha2-nistp521, ecdh-sha2-nistp384, ecdh-sha2-nistp256, diffie-hellman-group14-sha1, diffie-hellman-group14-sha256, diffie-hellman-group16-sha512, diffie-hellman-group18-sha512, diffie-hellman-group14-sha256@ssh.com, diffie-hellman-group-exchange-sha256, curve25519-sha256, curve25519-sha256@libssh.org, (PQC): ecdh-nistp521-kyber1024-sha512@ssh.com, (PQC): curve25519-frodkem1344-sha512@ssh.com, (PQC): sntrup761x25519-sha512@openssh.com, (PQC): mlkem768nistp256-sha256, (PQC): mlkem1024nistp384-sha384, (PQC): mlkem768x25519-sha256.

ListenAddress

Specifies the IP address of the interface where the **sshd2** server socket is bound. The format for this option is

```
ip-address [port] ,
```

where **port** is optional. IPv6 addresses may be enclosed in brackets and must be if they start with a colon. The **port**, if not defined here, will be the value of the last **Port** definition (or the default, 22, if **Port** has not been defined). If the specified IP address is **any**, **sshd2** will listen to all interfaces. If **sshd2** should listen to only some interfaces, specify the **ListenAddress** parameter for each interface.

The default is **any**.

ListenerRetryInterval

Declares how often **sshd2** tries/retries to create listeners which fail to open initially or later get deleted by the operating system.

The interval is given either in seconds (**s** or nothing after the number), in minutes (**m**), in hours (**h**), in days (**d**), or in weeks (**w**).

The default is 0 (zero), which means **sshd2** does not retry but gives up and exits immediately when a listener fails to open or dies.

LoadControl.Active

Specifies whether load control is enabled. The purpose of load control is to help keep the server running when the load is high, that is, when the number of current connections is near [MaxConnections](#). The argument must be yes or no. The default is no.



Note

If [MaxConnections](#) is set to 0 or 1, load control is disabled even if [LoadControl.Active](#) is set to yes.

LoadControl.DiscardLimit

When Tectia Server for IBM z/OS's load is high, connections from IP addresses that have not recently had a successful authentication are discarded. This keyword specifies the number of connections accepted from any IP address. The allowed value range is from 1 to [MaxConnections](#)-1. The default is 90 percent of the value of [MaxConnections](#).

LoadControl.WhitelistSize

Specifies the length of the white list in which Tectia Server for IBM z/OS keeps the IP addresses of connections that have had a successful authentication. The default is 1000.

LoginGraceTime

The server disconnects after this time if the user has not successfully logged in. If the value is 0, there is no time limit. The default is 600 (seconds).

MACs

Specifies the MAC (Message Authentication Code) algorithm to use for data integrity verification. The supported algorithms are:

```
hmac-sha1
hmac-sha1-96
hmac-sha2-256
hmac-sha256-2@ssh.com
hmac-sha224@ssh.com
hmac-sha256@ssh.com
hmac-sha-384@ssh.com
hmac-sha2-512
hmac-sha512@ssh.com
```

Multiple MACs can be specified as a comma-separated list. Special values for this option are:

- Any - includes all supported MACs

- AnyStd - includes MACs from the IETF SSH standards (hmac-sha1, hmac-sha1-96, hmac-sha2-256, hmac-sha2-512)
- AnyMac - the same as Any
- AnyStdMac - the same as AnyStd

The default algorithms are hmac-sha1, hmac-sha1-96, hmac-sha2-256, hmac-sha256-2@ssh.com, hmac-sha224@ssh.com, hmac-sha256@ssh.com, hmac-sha384@ssh.com, hmac-sha2-512 and hmac-sha512@ssh.com.

MaxBroadcastsPerSecond

Specifies how many UDP broadcasts the server handles per second. The default value is 0 and no broadcasts are handled at all. Broadcasts that exceed the limit are silently ignored. Received unrecognized UDP datagrams also consume the capacity defined by this option.

MaxConnections

Specifies the maximum number of connections that **sshd2** will handle simultaneously. This is useful against flooding attacks (attempts to interrupt the server from working properly by opening a high number of new connections). The argument is a positive number. The value 0 means that the number of connections is not limited. The default is 1000.



Note

`MaxConnections` must be greater than 1 when load control is used. For more information on load control, see [Section 4.9.4](#).

Note that by using (at least) xinetd you achieve the same effect on a more generic level.

NoDelay

If set to yes, enables socket option `TCP_NODELAY`. The argument must be yes or no. The default is no.

PasswdPath

Specifies the location of the **passwd** program (or equivalent). By default this is set to where the `configure` script found it. This program will be run with the privileges of the user logging in.

PasswordApplName

Specifies an application name for z/OS passticket validation via password authentication method. If an application name is defined, read access must be granted for user using password authentication in RACF APPL class with profile name the same as application name.

If `PasswordApplName` statement is not used, no application name is defined. If z/OS passticket is used, the value of `PasswordApplName` is an application name used to determine RACF class PTKTDATA profile name. The profile in class PTKTDATA is essential for z/OS passticket validation.

For example, `PasswordApplName "SSZAPPL"`. `SSZAPPL` will be the application name to determine PTKTDATA profile name. Profile `SSZAPPL` must also be defined in RACF class APPL with read access being granted for all users using password authentication method.

PasswordGuesses

Specifies the number of tries that the user has when using password authentication. The default is 3.

PermitEmptyPasswords

When password authentication is allowed, this keyword specifies whether the server allows login to accounts with empty password strings. The argument must be `yes` or `no`. The default is `no`.

PermitRootLogin

Specifies whether root can log in using `sshg3`. The options are `yes`, `nopwd`, and `no`.

The default is `yes`, allowing root logins through any of the authentication types allowed for other users. The `nopwd` value disables password-authenticated root logins. The `no` value disables root logins through any of the authentication methods. (The values `nopwd` and `no` are equivalent unless you have some other means of authentication for root, e.g. public key.)

Root login with public-key authentication when the command option has been specified will be allowed regardless of the value of this setting (which may be useful for taking remote backups even if root login is normally not allowed).

PidFile

Specifies the file where the process ID of the server is written. The default is `/opt/tec-tia/var/run/sshd2_22.pid`.

Port

Specifies the port number that `sshd2` listens to. The current default is 22.

PrintMotd

Specifies whether `sshd2` should print `/etc/motd` (message of the day) when a user logs in interactively. The default is `yes`. The argument must be `yes` or `no`.

ProxyServer

With this option, **sshd2** can use a SOCKS (v4 or v5) or an HTTP proxy when a client forwards a connection. The server will use the value of this option when connecting. With SOCKS, you can specify whether to use SOCKS5 with the option [UseSocks5](#).

The format of the variable is `socks://username@socks_server:port/network/netmask, network/netmask ...` (with SOCKS proxy) or `http://username@socks_server:port/network/netmask, network/netmask ...` (with HTTP proxy).

For instance, by setting `ProxyServer` to

```
socks://mylogin@socks.ssh.com:1080/203.123.0.0/16,198.74.23.0/24
```

host `socks.ssh.com` and port 1080 are used as your SOCKS server for connections outside of networks 203.123.0.0 (16-bit domain) and 198.74.23.0 (8-bit domain). Those networks are connected directly.

If this option is set, it should almost always contain the local loopback network (127.0.0.0/8) as a network that is connected directly.

This option and the option [SocksServer](#) behave identically. Specifying both will cause the later definition to override the first.

PublicHostKeyFile

Specifies the file containing the public host key. The default is `/opt/tectia/etc/hostkey.pub`.

QuietMode

If set to `yes`, nothing is logged in the system log, except fatal errors. The argument must be `yes` or `no`. The default is `no`.

RandomSeedFile

Specifies the name of the random seed file.

RekeyIntervalSeconds

The number of seconds after which the key exchange is done again. The default is 3600 seconds (1 hour). The value 0 (zero) turns rekey requests off. This does not prevent the client from requesting rekeys. Other clients (not **sshg3**) may not have rekey capabilities implemented correctly, and they might not be able to handle rekey requests. This means that they may possibly close the connection or even crash.

RequiredAuthentications

Analogous to [AllowedAuthentications](#), with one difference: the authentication methods listed here must all succeed before a user is considered authenticated. Leaving this list empty is equivalent to not using the option at all.

If this option is set, `AllowedAuthentications` is ignored.



Note

Versions of `sshd2` before 3.1.0 required `RequiredAuthentications` to be a subset of `AllowedAuthentications`. This is no longer the case.

RequireReverseMapping

This is used to check whether the host name DNS lookup must succeed when checking whether connections from hosts are allowed using `AllowHosts` and `DenyHosts`. If this is set to yes, and the name lookup fails, the connection is denied. If set to no, and name lookup fails, the remote host's IP address is used to check whether it is allowed to connect. This is probably not what you want if you have specified only host names (not IP addresses) with `{Allow,Deny}Hosts`. See also `ResolveClientHostName`. The argument must be yes or no. The default is no.

ResolveClientHostName

This parameter controls whether `sshd2` will try to resolve the client IP at all. This is useful when you know that the DNS cannot be reached, and the query would cause additional delay in logging in. Note that if you set this to no, you should not set `RequireReverseMapping` to yes. The argument must be yes or no. The default is yes.

SettableEnvironmentVars

This keyword can be followed by any number of patterns, separated by commas. Patterns are matched using the egrep syntax (see `sshregex(1)`), or the syntax specified in the metaconfiguration header of the configuration file. You can use the comma ',' character in the patterns by escaping it with a backslash '\'. By default, no environment variables can be set (but the default `/opt/tectia/etc/sshd2_config` file specifies some common and safe environment variables).

With this option, you can allow setting some or all environment variables. This option is used to check whether setting is allowed by the client (`sshg3`), by the user's `$HOME/.ssh2/environment` file or public key options. This is not used when setting variables from `/etc/environment` or other "root-only" files, as the user does not have control over those anyway.

Note that this option only changes the settings of environment variables before the user's shell is run. After that, the users are of course free to set whichever variables they want in the environment.

SftpDNSAllocWTO

If set to yes, output IGD101I and IGD104I messages on console upon allocation and deallocation of new SMS datasets. The default is no.

SftpExit

Specifies the sft-server-g3 user exit module. This keyword is to be followed by two parameters separated by commas. The first parameter specifies a z/OS PDS containing the exit module. The second parameter specifies the module name of the FTCHKJES user exit.

If the first parameter is not specified, z/OS will search and load the exit module from the z/OS LPA and LINKLIST.

The input and output parameters, execution environment of FTCHKJES user exit follows IBM FTP server user exits requirement except APF requirement. sft-server-g3 user exit module is a non-APF module.

The default is " ".

SftpSysLogFacility

As [sysLogFacility](#), but defines the log facility the **sft-server-g3** subsystem will use. The default is DAEMON.

SftpSmfType

Defines the SMF record type used in SMF accounting in **sshd2** and the **sft-server-g3** subsystem. By default, this has no value, i.e. no accounting is performed. The possible values are: `none`, `TYPE119`.

ShellAccountCodeset

Specifies the code set of terminal session data in user's shell. The default is `IBM-1047`.

ShellAccountLineDelimiter

Specifies the line delimiter of terminal session data in user's shell. Special values for this option are `DOS`, `MAC`, `MVS` and `UNIX`. The default is `MVS`.

ShellConvert

Defines whether conversions are to be done for shell access and remote command execution. Possible values are `yes` and `no`. The default is `yes`.

ShellTransferCodeset

Defines the coded character set (CCS) on the line. The default is `ISO8859-1`.

ShellTransferLineDelimiter

Specifies the line delimiter of terminal session data during transfer. Special values for this option are `DOS`, `MAC`, `MVS` and `UNIX`. The default is `UNIX`.

ShellTranslateTable

Defines the MVS translate table to be used from line to shell.

SocksServer

Equal to [ProxyServer](#).

StrictModes

Specifies whether **sshd2** should check file modes and ownership of the user's home directory. This is normally desirable because novices sometimes accidentally leave their directory or files world-writable.

If this is set, permissions are checked during public-key authentication for the user's `.ssh2` directory, public keys used and the `authorization` file.

Also the hostkey is checked for invalid permissions. The hostkey must only be readable and writable by the root user, the user public keys and `authorization` file must only be writable by the user. The permission check of the user's `.ssh2` directory can be further controlled by using the `StrictModes.UserDirMaskBits` configuration option.

The argument must be `yes` or `no`. The default is `yes`.

StrictModes.UserDirMaskBits

Specifies the permission mask for the user's `.ssh2` directory if `StrictModes` configuration option is used. The bits set with this option are not allowed to be set in the actual permissions. This means that with `StrictModes` and this option set to "077", the user's `.ssh2` directory may not have any permissions to group or others (only for the user). The default is "022".

Subsystem-<subsystem name>

Specifies a subsystem. The argument is a command that is executed when the subsystem is requested.

sftpg3 uses a subsystem of **sshd2** to transfer files securely. In order to use the SFTP server, you must have the following subsystem definition:

```
subsystem-sftp sft-server-g3
```

SysLogFacility

Gives the facility code that is used when logging messages from `sshd2`. The possible values are: DAEMON, USER, AUTH, LOCAL0, LOCAL1, LOCAL2, LOCAL3, LOCAL4, LOCAL5, LOCAL6, LOCAL7. The default is AUTH.

TcpListenBacklog

`TcpListenBacklog` specifies the backlog value in `listen()`. The default value for `TcpListenBacklog` is 16, which is currently hard coded. It allows the TCPIP stack to deny new connection requests when the listen queue length is full.

TcpListenRate

TcpListenRate specifies the number of TCP Listen per second. If the TCP listen rate is hit, the listener will be paused for the amount of milliseconds defined with TcpListenPause and will remain in the TCPIP backlog. Valid value must be greater than zero. The default value is 5.

TcpListenPause

TcpListenPause specifies the number of milliseconds to pause. If the TcpListenRate is hit, the listener will be paused for the specified amount of milliseconds. Valid values are between 1 and 1000. The default value is 500 milliseconds (0.5 seconds).

Terminal.AllowUsers

Lists users that are allowed terminal access to the server host. This option can be followed by any number of patterns of the form `user` or `user@host`, separated by commas. The details explained under the [AllowHosts](#) option apply accordingly.

If this configuration option is used, only users that match the users listed under `Terminal.AllowUsers` may gain terminal access (provided that they are not restricted by other configuration options). By default, all users are allowed terminal access.

Note that all the other login authentication steps must still be successfully completed. `Terminal.AllowUsers` and `Terminal.DenyUsers` are additional restrictions.

Terminal.DenyUsers

Lists users that are denied terminal access to the server host. This is the opposite of `Terminal.AllowUsers` and works accordingly.

If a user matches a pattern in both `Terminal.AllowUsers` and `Terminal.DenyUsers` then terminal access is denied.

Note that when terminal access is denied so is remote command execution, forced commands (including commands related to public-key authentication and forced password changes), X11 forwarding, and agent forwarding. As a user has no shell access, any password changes (using system commands) will not be possible.

Access to subsystems (such as SFTP) and TCP tunneling (port forwarding) are still possible.

If a client requests terminal access (in addition to any other services, such as tunneling) the client may disconnect upon being refused terminal access. To prevent this, the client should be configured to not request terminal access, for example, by using the `-s` option in the `ssh` command (the option may vary with the `ssh` implementation).

Terminal.AllowGroups

Similar to `Terminal.AllowUsers` but matches groups rather than user names. The details explained under the [AllowGroups](#) option apply accordingly.

Terminal.DenyGroups

Similar to `Terminal.DenyUsers` but matches groups rather than user names. This is the opposite of `Terminal.AllowGroups` and works accordingly.

UseCryptoHardware

Specifies how cryptographic hardware is utilized. The value for this option is a comma-separated list of `algorithm:support_level` pairs. The list may start with a sole support level specifier.

Valid values for `support_level` are:

- `yes` - cryptographic hardware is used for this algorithm if available and software cryptography is used if hardware cryptography is not available
- `no` - software cryptography is used for this algorithm
- `must` - only cryptographic hardware is used for the algorithm

Valid values for `algorithm` are:

- `3des` - Triple DES symmetric cipher used for encrypting the session
- `aes` - AES symmetric cipher used for encrypting the session
- `sha` - SHA-1 or SHA-2 algorithm used for MAC (Message Authentication Code)
- `rng` - Random number generator. The hardware is used to generate entropy for the random seed at start-up and for reseeding the random number generator algorithm periodically during execution.)



Note

If there is any use (as configured or by default) of an algorithm for which `support_level` is set to `must` and the relevant hardware support is not available, the server will refuse to start.

Example 1. Use cryptographic hardware for AES and SHA; all others should use software:

```
UseCryptoHardware      no,aes:must,sha:must
```

In this case, if any AES ciphers and/or SHA-based MACs are allowed in the configuration, and the relevant hardware support is not available, the server will refuse to start.

This could be coupled with allowing only AES ciphers and SHA-based MACs with the [Ciphers](#) and [MACs](#) options.

Example 2. Use cryptographic hardware for all algorithms except for AES:

UseCryptoHardware	yes, aes: no
-------------------	--------------

UserConfigDirectory

Specifies where user-specific configuration data is found. With this the administrator can control those options that are usually controlled by the user. This is given as a pattern string which is expanded by **sshd2**.

%D is the user's home directory,
 %U is the user's login name,
 %IU is the user's user ID (uid),
 %IG is the user's group ID (gid).

The default is %D/.ssh2.

UserSpecificConfig

As [HostSpecificConfig](#), but these configuration files are read later, when the user name that the client is trying to log in as is known. Also the range of configuration options available is smaller, due to the fact that they would not make sense in these files. You can use patterns of form "user[%group][@host]", where user is matched with the user name and UID, group is matched with the user's primary and any secondary groups, both group name and GID, and host is matched as described under option [AllowHosts](#).

See [sshd2_subconfig\(5\)](#) for more thorough documentation on what you can set in this subconfiguration file.

UseSocks5

Use SOCKS5 instead of SOCKS4 when connecting to remote host. Note that you have to set [SocksServer](#) to a meaningful value. The argument must be yes or no. The default is no (i.e. use SOCKS4).

VerboseMode

Causes **sshd2** to print debugging messages about its progress. This is helpful in debugging connection, authentication, and configuration problems. Also causes **sshd2** to not fork on connection, so only one connection is handled at the time.

WTORoutingCodes

Specifies the z/OS routing codes for WTO messages. Valid values for routing codes are from 1 to 128. The default is 1,11.

ZcpuMathFacility

Controls the usage of the z13 Vector Facility. If set to 1 (default), **sshd2** will probe the availability of the z13 Vector Facility. If the facility is available, **sshd2** will use it. If **zcpuMathFacility** is set to 0 or the facility is not available, **sshd2** will not use the z13 Vector Facility. The default is 1.

sshd2_subconfig

sshd2_subconfig -- advanced configuration of sshd2 on z/OS

Description

You can also specify configuration options in so-called subconfiguration files, which have the same basic format as the main configuration file. The process forked to handle the user's connection reads these files. They are read at run-time, so if they are modified, it is not necessary to restart the server process.

If parsing of the subconfiguration files fails, the connection is terminated (for the host-specific subconfiguration) or access denied (for the user-specific subconfiguration) by the server.

Most of the configuration options that work in the main file work also in these, but some do not, where it either does not make sense to set them (e.g. `ListenAddress` and `Port`, which only affect the daemon process listening to the port, and would not affect that behavior in any way in a subconfiguration file) or it would be confusing (e.g. `AllowUsers` in user-specific subconfiguration, and `AllowHosts` in host-specific subconfiguration.).

The value for `{Host,User}SpecificConfig` keywords is a pattern-filename pair, separated by a whitespace. With `UserSpecificConfig`, the pattern is of format "`user[%group][@host]`", where the pattern `user` is matched with the user name and UID, `group` is matched with the user's primary and any secondary groups, both group name and GID, and `host` is matched as described under option `AllowHosts`. With `HostSpecificConfig`, the pattern is "`host`" (as in `UserSpecificConfig`).

Unlike `sshd2_config`, the subconfiguration files may have configuration blocks, or stanzas, in them. The subconfiguration heading is interpreted identically to what is described above, i.e. with `UserSpecificConfig` the pattern is of the format "`user[%group][@host]`", and with `HostSpecificConfig` the format is "`host`".

The subconfiguration files are divided into two categories: user-specific and host-specific. User-specific subconfiguration files are read when the client has stated the user name it is trying to log in with. At this point, the server will obtain additional information about the user: does the user exist, what is the user's UID, and what groups does the user belong to. With this information, the server can read the user-specific configuration files specified by `UserSpecificConfig` in the main `sshd2` configuration file.

The other category is host-specific configuration files, which are configured with the `HostSpecificConfig` variable. These files are read immediately after the daemon has forked a new process to handle the connection. Thus most configuration options can be set in these.

Note that it is possible to mix these configuration files. This is not recommended, because any global settings in these files would be set multiple times (which would not do any harm per se, but might lead to behavior not intended by the administrator).

Subconfigurations are really flexible, and because of that, dangerous if the logic of the files is not carefully planned. You can specify different authentication methods for different users, different banner messages for

people from certain hosts, and set log messages of certain groups to go to different files. There are a lot of possibilities here.

Options

Configuration variables that work everywhere, i.e. in the main file, the user-specific, and the host-specific configuration files:

```
AllowSHosts
AllowTcpForwarding
AllowedAuthentications
AuthInteractiveFailureTimeout
AuthKbdInt.NumOptional
AuthKbdInt.Optional
AuthKbdInt.Plugin
AuthKbdInt.Required
AuthKbdInt.Retries
AuthPublicKey.Cert.Required
AuthPublicKey.Cert.ValidationMethods
AuthorizationEkInitStringMapper
AuthorizationEkInitStringMapperTimeout
AuthorizationEkProvider
AuthorizationFile
AuthPublicKey.MaxValue
AuthPublicKey.MinValue
CheckMail
DenySHosts
AllowAgentForwarding or ForwardAgent
IdleTimeOut
PasswdPath
PasswordGuesses
PermitEmptyPasswords
PrintMotd
QuietMode
RekeyIntervalSeconds
RequiredAuthentications
SettableEnvironmentVars
SftpSysLogFacility
ShellConvert
ShellAccountCodeset
ShellTransferCodeset
ShellTranslateTable
StrictModes
```

```
SysLogFacility
UserConfigDirectory
VerboseMode
```

Variables that work in the host-specific configuration file and the main file:

```
AllowGroups
AllowTcpForwardingForGroups
AllowTcpForwardingForUsers
AllowUsers
BannerMessageFile
ChRootGroups
ChRootUsers
Ciphers
DenyGroups
DenyTcpForwardingForGroups
DenyTcpForwardingForUsers
DenyUsers
DisableVersionFallback
ExternalAuthorizationProgram
ForwardACL
IdentityDispatchUsers
KEXs
LoginGraceTime
MACs
PermitRootLogin
```

sshregex

sshregex -- regular expressions used in file name globbing with **scpg3**, **sftpg3** and configuration files

Description

This document describes the regular expressions (or globbing patterns) used in file name globbing with **scpg3** and **sftpg3** and in the `sshd2_config` and `ssh-socks-proxy-config.xml` configuration files. Regex syntax used with **scpg3** and **sftpg3** is `zsh_fileglob`.

Regex syntax: **egrep**

Patterns

The escape character is a backslash (\). You can use it to escape meta characters to use them in their plain character form.

In the following examples literal 'E' and 'F' denote any expression, whether a pattern or a character.

(

Start a capturing subexpression.

)

End a capturing subexpression.

E|F

Disjunction, match either E or F (inclusive). E is preferred if both match.

E*

Act as Kleene star, match E zero or more times.

E+

Closure, match E one or more times.

E?

Option, match E optionally once.

.

Match any character except for newline characters (\n, \f, \r) and the NULL byte.

E{n}

Match E exactly n times.

E{n,} or E{n,0}

Match E n or more times.

E{,n} or E{0,n}

Match E at most n times.

E{n,m}

Match E no less than n times and no more than m times.

[

Start a character set, see [the section called “Character Sets for egrep and zsh_fileglob”](#).

\$

Match the empty string at the end of the input or at the end of a line.

^

Match the empty string at the start of the input or at the beginning of a line.

Escaped Tokens for Regex Syntax Egrep

\0n..n

The literal byte with octal value n..n.

\0

The `NULL` byte.

\[1-9]..x

The literal byte with decimal value [1-9]..x.

\xn..n or \0xn..n

The literal byte with hexadecimal value n..n.

\<

Match the empty string at the beginning of a word.

\>

Match the empty string at the end of a word.

\b

Match the empty string at a word boundary.

\B

Match the empty string provided it is not at a word boundary.

\w

Match a word-constituent character, equivalent to [a-zA-Z0-9-].

\W

Match a non-word-constituent character.

\a

Literal alarm character.

\e

Literal escape character.

\f

Literal line feed.

\n

Literal new line, equivalent to C's \n so it can be more than one character long.

\r

Literal carriage return.

\t

Literal tab.

All other escaped characters denote the literal character itself.

Regex syntax: zsh_fileglob (or traditional)

Patterns

The escape character is a backslash '\'. With this you can escape meta characters to use them in their plain character form.

In the following examples literal 'E' and 'F' denote any expression, whether a pattern or a character.

*

Match any string consisting of zero or more characters. The characters can be any characters apart from slashes (/). However, the asterisk does not match a string if the string contains a dot (.) as its first character, or if the string contains a dot immediately after a slash. This means that the asterisk cannot be used to match file names that have a dot as their first character.

If the previous character is a slash (/), or if an asterisk (*) is used to denote a match at the beginning of a string, it does match a dot (.)

That is, the asterisk (*) functions as normal in Unix shell fileglobs.

?

Match any single character except for a slash (/). However, do not match a dot (.) if located at the beginning of the string, or if the previous character is a slash (/).

That is, the question mark (?) functions as normal in Unix shell fileglobs (at least in ZSH, although discarding the dot may not be a standard procedure).

**/

Match any sequence of characters that is either empty, or ends in a slash. However, the substring '!' is not allowed. This mimics the **/ construct in ZSH. (Please note that '**' is equivalent to '*'.)

E#

Act as Kleene star, match E zero or more times.

E##

Closure, match E one or more times.

(

Start a capturing subexpression.

)

End a capturing subexpression.

E|F

Disjunction, match either E or F (inclusive). E is preferred if both match.

[

Start a character set. (see below)

Character Sets for egrep and zsh_fileglob

A character set starts with '[' and ends at non-escaped ']' that is not part of a POSIX character set specifier and that does not follow immediately after '['.

The following characters have a special meaning and need to be escaped if meant literally:

- (minus sign)

A range operator, except immediately after '[', where it loses its special meaning.

^ or ! (latter applies to ZSH_FILEGLOB)

If immediately after the starting '[', denotes a complement: the whole character set will be complemented.
Otherwise literal '^'.

[:alnum:]

Characters for which 'isalnum' returns true (see ctype.h).

[:alpha:]

Characters for which 'isalpha' returns true (see ctype.h).

[:cntrl:]

Characters for which 'iscntrl' returns true (see ctype.h).

[:digit:]

Characters for which 'isdigit' returns true (see ctype.h).

[:graph:]

Characters for which 'isgraph' returns true (see `ctype.h`).

[:lower:]

Characters for which 'islower' returns true (see `ctype.h`).

[:print:]

Characters for which 'isprint' returns true (see `ctype.h`).

[:punct:]

Characters for which 'ispunct' returns true (see `ctype.h`).

[:space:]

Characters for which 'isspace' returns true (see `ctype.h`).

[:upper:]

Characters for which 'isupper' returns true (see `ctype.h`).

[:xdigit:]

Characters for which 'isxdigit' returns true (see `ctype.h`).

Example: `[:xdigit:]XY` is typically equivalent to `[0123456789ABCDEFabcdefXY]`.

It is also possible to include the predefined escaped character sets into a newly defined one, so `[\d\s]` matches digits and whitespace characters.

Also, escape sequences resulting in literals work inside character sets.

Regex syntax: ssh

Patterns

The escape character is a tilde '~'. With this you can escape meta characters to use them in their plain character form.



Note

In configuration the backslash '\' is used to escape the list separator (',').

In the following examples literal 'E' and 'F' denote any expression, whether a pattern or a character.

(

Start a capturing subexpression.

)

End a capturing subexpression.

```
{
  Start anonymous, non-capturing subexpression.

}
  End anonymous, non-capturing subexpression.

E|F
  Disjunction, match either E or F (inclusive). E is preferred if both match.
```

E*

Act as Kleene star, match E zero or more times.

E*?

Act as Kleene star, but match non-greedily (lazy match).

E+

Closure, match E one or more times.

E+?

Closure, but match non-greedily (lazy match).

E?

Option, match E optionally once.

E??

Option, but match non-greedily (lazy match).

.

Match ANY character, including possibly the NULL byte and the newline characters.

E/n/

Match E exactly n times.

E/n/ or E/n,0/

Match E n or more times.

E/,n/ or E/0,n/

Match E at most n times.

E/n,m/

Match E no less than n times and no more than m times.

E/n,/? , E/n,0,/? , E/,n,/? , E/0,n,/? , E/n,m,/?

The lazy versions of above.

[

Start a character set. See [the section called “Character Sets for Regex Syntax ssh”](#).

>C

One-character lookahead. 'C' must be either a literal character or parse as a character set. Match the empty string anywhere provided that the next character is 'C' or belongs to it.

<C

One-character lookback. As above, but examine the previous character instead of the next character.

\$

Match the empty string at the end of the input.

^

Match the empty string at the start of the input.

Escaped Tokens for Regex Syntax ssh

~0n..n

The literal byte with octal value n..n .

~0

The NULL byte.

~[1-9]..x

The literal byte with decimal value [1-9]..x .

~xn..n or ~0xn..n

The literal byte with hexadecimal value n..n .

~<

Match the empty string at the beginning of a word.

~>

Match the empty string at the end of a word.

~b

Match the empty string at a word boundary.

~B

Match the empty string provided it is not at a word boundary.

~d

Match any digit, equivalent to [0:9].

~D

Match any character except a digit.

~s

Match a whitespace character (matches space, newline, line feed, carriage return, tab and vertical tab).

`~S`

Match a non-whitespace character.

`~W`

Match a word-constituent character, equivalent to [a-zA-Z0-9-].

`~W`

Match a non-word-constituent character.

`~a`

Literal alarm character.

`~e`

Literal escape character.

`~f`

Literal line feed.

`~n`

Literal new line, equivalent to C's \n so it can be more than one character long.

`~r`

Literal carriage return.

`~t`

Literal tab.

All other escaped characters denote the literal character itself.

Character Sets for Regex Syntax ssh

A character set starts with '[' and ends at non-escaped ']' that is not part of a POSIX character set specifier and that does not follow immediately after '['.

The following characters have a special meaning and need to be escaped if meant literally:

`:`

A range operator, except immediately after '[', where it loses its special meaning.

`-` (minus sign)

Until the next `+`, the characters, ranges, and sets will be subtracted from the current set instead of adding. If appears as the first character after '[', start subtracting from a set containing all characters instead of the empty set.

`+`

Until the next `-`, the characters, ranges, and sets will be added to the current set. This is the default.

[:alnum:]

Characters for which 'isalnum' returns true (see `ctype.h`).

[:alpha:]

Characters for which 'isalpha' returns true (see `ctype.h`).

[:cntrl:]

Characters for which 'iscntrl' returns true (see `ctype.h`).

[:digit:]

Characters for which 'isdigit' returns true (see `ctype.h`).

[:graph:]

Characters for which 'isgraph' returns true (see `ctype.h`).

[:lower:]

Characters for which 'islower' returns true (see `ctype.h`).

[:print:]

Characters for which 'isprint' returns true (see `ctype.h`).

[:punct:]

Characters for which 'ispunct' returns true (see `ctype.h`).

[:space:]

Characters for which 'isspace' returns true (see `ctype.h`).

[:upper:]

Characters for which 'isupper' returns true (see `ctype.h`).

[:xdigit:]

Characters for which 'isxdigit' returns true (see `ctype.h`).

It is also possible to include the predefined escaped character sets into a newly defined one, so `[\~d\~s]` matches digits and whitespace characters.

Also, escape sequences resulting in literals work inside character sets.

Example: `[:xdigit:]-a:e]` is typically equivalent to `[0123456789ABCDEFf]`.

Appendix B Default Configuration Files

The default server configuration files can be found in `/opt/tectia/etc`:

- `sshd2_config`: the main server configuration file
- `ssh_certd_config`: the Certificate Validator configuration file

For convenience, the contents of the default configuration files are also shown in [Section B.1](#) and [Section B.2](#).

B.1 Default `sshd2_config` Configuration File

The default `sshd2_config` configuration file is shown below. For descriptions of the configuration options, see [sshd2_config\(5\)](#)

```
## SSH CONFIGURATION FILE FORMAT VERSION 1.1
## REGEX-SYNTAX egrep
## end of metaconfig
## (leave above lines intact!)
##
## sshd2_config
##
## SSH Tectia Server 6.6 for IBM z/OS - SSHD2 Server Configuration File
##

## General

# Server Authentication: server keys in files
#      HostKeyFile                  hostkey
#      PublicHostKeyFile            hostkey.pub
#      HostCertificateFile         hostkey.crt # Comment out the pubkey
#                                         # if cert is specified
# Server Authentication: server key and certificate in SAF
#      HostKeyEkProvider           "zos-saf"
#      HostKeyEkInitString        "KEYS(ID(SSH2) RING(HOSTKEY) \
#LABEL('Host key label'))"
#      HostKey.Cert.Required      no
#
#      RandomSeedFile             random_seed
```

```

#      PidFile           default
#      BannerMessageFile /opt/tectia/etc/ssh_banner_message
#      BannerMessageFile /etc/issue.net
#
#      VerboseMode       no # For debugging only. See man page.
#      QuietMode         no
#      SyslogFacility    AUTH
#      SyslogFacility    LOCAL7
#      SftpDSNAllocWTO   NO
#      SftpExit          " "
#      SftpSyslogFacility DAEMON
#      SftpSmfType       none
#      SftpSmfType       TYPE119
#      SftpEndTransferWTO NONE
#      SftpEndTransferWTO SSZ3045I
#      SftpEndTransferWTO "SSZ3045I Sftp transaction end:%n\
#%t File: %F%n\
#%t IP local/remote: %LI:%LP/%RI:%RP%n\
#%t Protocol version: %PV%n\
#%t Login method: %LM Cipher: %CS%n\
#%t Userid: %U Action: %A(%RC)%n\
#%t Bytes transferred: %TS"
#  where %F is the file/dataset name.
#  %LI and %LP are the local IP address and port number.
#  %RI and $RP are the remote IP address and port number.
#  %PV is the remote SSH protocol version.
#  %LM is the login method (password/publickey).
#  %CS is the cipher algorithm name.
#  %A is the operation performed(UPLOAD/DOWNLOAD).
#  %RC is the operation status (SUCCEEDED/FAILURE).
#  %TS is the number of bytes transferred.
#  %t is eight space characters.
#  %n is newline character.
#      WTORoutingCodes    1,11
#      ZcpuMathFacility   1

## Communication with ssh-certd

#      CertdListenerPath  /opt/tectia/var/run/ssh-certd-listener

## Network

#      Port              22
#      AddressFamily      inet
#                           inet:  IPv4 only
#                           inet6: IPv6 only
#                           any:   Ipv4 and IPv6
#
#      PidFile           default
#      PidFile           /opt/tectia/var/run/sshd2_22.pid
#      PidFile           /opt/tectia/var/run/sshd2.pid

```

```

#      ListenAddress          any
#      ListenerRetryInterval 0
#      ListenerRetryInterval 60
#      ResolveClientHostName yes
#      RequireReverseMapping no
#      MaxBroadcastsPerSecond 0
#      MaxBroadcastsPerSecond 1
#      NoDelay                no
#      KeepAlive               yes
#      TcpListenBacklog        16
#      TcpListenRate           5
#      TcpListenPause          500

## Load Control

#      MaxConnections         1000
#      LoadControl.Active      no
#      LoadControl.DiscardLimit see below
#      LoadControl.WhitelistSize 1000
#
# MaxConnections is the limit of the number of concurrent connections. It must
# be greater than 1 when Load Control is active. The value 0 means that the
# number of connections is unlimited and causes Load Control to be disabled.
#
# Set LoadControl.Active to yes to enable load control.
#
# LoadControl.DiscardLimit must not be larger than MaxConnections. The default
# value is 90 % of MaxConnections.
#
# LoadControl.WhitelistSize is the number of distinct IP addresses that the
# whitelist can hold.

## Crypto

#      Ciphers                 aes128-ctr,aes192-ctr,aes256-ctr, \
#aes128-gcm@openssh.com,aes256-gcm@openssh.com, \
#aes128-cbc,aes192-cbc,aes256-cbc,3des-cbc
# Specifies the accepted encryption algorithms for connection security. It is a
# list of cipher names or one of the names Any, AnyCipher, AnyStd or
# AnyStdCipher.
# Any and AnyCipher include all the ciphers supported by Tectia.
# AnyStd and AnyStdCipher include ciphers listed in the SSH standards.
# Any and AnyStd also include "none", which means no encryption.
#
#      MACs                   hmac-sha1,hmac-sha1-96,hmac-sha2-256, \
#hmac-sha256-2@ssh.com,hmac-sha224@ssh.com,hmac-sha256@ssh.com, \
#hmac-sha384@ssh.com,hmac-sha2-512,hmac-sha512@ssh.com
# Specifies the accepted Message Authentication Codes for connection security.
# It is a list of MAC names or one of the names Any, AnyMAC, AnyStd or
# AnyStdMAC.

```

```

# Any and AnyMAC include all the MACs supported by Tectia.
# AnyStd and AnyStdMAC include the MACs listed in the SSH standards.
# Any and AnyStd also include "none", which means no message authentication.
#
#      Compressions          none,zlib
# Specifies the accepted compression methods for connection.

#      KEXs                  ecdh-sha2-nistp521, \
#ecdh-sha2-nistp384,ecdh-sha2-nistp256, \
#diffie-hellman-group-exchange-sha256, \
#diffie-hellman-group14-sha256, \
#diffie-hellman-group14-sha256@ssh.com, \
#diffie-hellman-group16-sha512,diffie-hellman-group18-sha512, \
#diffie-hellman-group14-sha1
# A list of key exchange names or Any, AnyKEX, AnyStd or AnyStdKEX.
#
#      HostKeyAlgorithms      x509v3-ecdsa-sha2-nistp521, \
#x509v3-ecdsa-sha2-nistp384,x509v3-ecdsa-sha2-nistp256, \
#ecdsa-sha2-nistp521,ecdsa-sha2-nistp384,ecdsa-sha2-nistp256, \
#x509v3-sign-dss,x509v3-sign-rsa, \
#rsa-sha2-256,rsa-sha2-512,ssh-dss,ssh-rsa, \
#x509v3-sign-dss-sha256@ssh.com,x509v3-sign-rsa-sha256@ssh.com, \
#ssh-dss-sha256@ssh.com,ssh-rsa-sha256@ssh.com
# A list of host key algorithm names or Any, AnyHostKeyAlgorithm, AnyStd or \
# AnyStdHostKeyAlgorithm.
#
#      RekeyIntervalSeconds   3600

## Crypto Hardware

#      UseCryptoHardware      yes
# Specifies whether hardware support is wanted for certain
# algorithms. The support levels are
#   no      do not use crypto hardware
#   yes     use crypto hardware if available
#   must    use crypto hardware, fail if not available
#
# The level may be given alone as a default for all algorithms or
# together with an algorithm. The algorithm names that may
# be used are:
#   rng      random number generator
#   sha      SHA1 and SHA2 digest algorithms (sha1 is equivalent)
#   aes      AES algorithms
#   3des    Triple DES
#
# UseCryptoHardware is a comma-delimited list of algorithm:support level
# pairs. It may start with a sole support level
#

```

```

# E.g. To use all available hardware support and fail if support for 3DES
#       or SHA is not available, specify "yes,aes:must,sha:must"
#
# On most IBM mainframe systems the following algorithms have hardware support:
# the ciphers "aes128-cbc,3des-cbc,aes192-cbc,aes256-cbc" and the MACs
# "hmac-sha1,hmac-sha224@ssh.com,hmac-sha256@ssh.com,hmac-sha2-256,
# hmac-sha256-2@ssh.com, hmac-sha384@ssh.com,hmac-sha2-512,
# hmac-sha512@ssh.com". The support is provided by
# the CPACF or IBM cryptographic card facility together with ICSF.
#
#      CryptoCardCipherIOThreshold      65536
# Specifies the minimum size of cipher request that will be routed to
# IBM cryptographic co-processor card (CEX), if the card is available and
# UseCryptoHardware is set to yes/must, for cipher processing. If the
# request size is less than the CryptoCardCipherIOThreshold value, the
# cipher request will be routed to CPACF facility. Special values are
# 0          route all cipher requests to IBM cryptographic
#             co-processor card
# 65536 or higher route all cipher requests to CPACF facility
#
#      CryptoCardMACGenerate          no
# Specifies whether to route MAC generation request to IBM cryptographic
# co-processor card (CEX). If it is set to yes, MAC generation request will
# route to IBM cryptographic co-processor card (CEX), if the card is available
# and UseCryptoHardware is set to yes/must, for MAC generation processing.

## User

#      PrintMotd          yes
#      CheckMail          yes
#      StrictModes        yes
# Specifies 1 hour (you can also use 'w' for week, 'd' for day, 'm' for
#             minute, 's' for seconds)
#      IdleTimeOut        1h
# without specifier, the default number is in seconds
#      IdleTimeOut        3600
#
#      UserConfigDirectory      "%D/.ssh2"
#      UserConfigDirectory      "/opt/tectia/etc/auth/%U"
#      AuthorizationFile      authorization
#
# Authorized keys file directive can be used in enabling public-key
# authentication against legacy authorized_keys file that contains
# several keys in single file.
#      AuthorizedKeysFile      "authorized_keys"
#      AuthorizedKeysFile      "%D/.ssh/authorized_keys"
#
# This variable is set here, because by default it is empty, and so no
# variables can be set. Because of that, we set a few common ones here.
      SettableEnvironmentVars      LANG, \
LC_(ALL|COLLATE|CTYPE|MONETARY|NUMERIC|TIME),PATH,TERM,TZ,SSH.*
```

```
## Conversion on terminal session

#      ShellTransferCodeset      ISO8859-1
#      ShellTransferLineDelimiter UNIX
#      ShellAccountCodeset      IBM-1047
#      ShellAccountLineDelimiter MVS
#      ShellTranslateTable      " "
#      ShellConvert              yes

## Tunneling

#      AllowTcpForwarding      yes
#      AllowTcpForwardingForUsers sjl, ra-user@remote\.example
#      DenyTcpForwardingForUsers 2[[:digit:]]*4,peelo
#      AllowTcpForwardingForGroups privileged_tcp_forwarders
#      DenyTcpForwardingForGroups coming_from_outside
#
#      AllowLocalForwarding     no
#      AllowLocalForwarding      yes

# Local port forwardings to host 10.1.0.25 ports 143 and 25 are
# allowed for all users in group users.
# Note that forwardings using the name of this host will be allowed (if
# it can be resolved from the DNS).
#
#      ForwardACL allow local .*%users \i10\.1\.0\.25%(143|25)
#
# Local port forwardings requested exactly to host proxy.example.com
# port 8080 are allowed for users that have 's' as first character
# and belong to the group with group ID (GID) 10:
#
#      ForwardACL allow local s.*%10 proxy\.example\.com%8080
#
# Remote port forwarding is denied for all users to all hosts:
#      ForwardACL deny remote .* .*
```

Authentication

```
## publickey and password allowed by default
#      AllowedAuthentications      publickey,password
#      AllowedAuthentications      publickey,keyboard-interactive
#      RequiredAuthentications      publickey,password
#      LoginGraceTime              600
#      AuthInteractiveFailureTimeout 2
#
#      AuthPublicKey.MaxValue      0
#      AuthPublicKey.MinValue      0
#      AuthPublicKey.Algorithms    AnyStdPublicKeyAlgorithm
#
```

```

#      AllowAgentForwarding      yes

#      AuthKbdInt.NumOptional      0
#      AuthKbdInt.Optional      password,plugin
#      AuthKbdInt.Required      password
#      AuthKbdInt.Retries      3
#
#      PermitEmptyPasswords      no
#      PasswordGuesses      3
#
## publickey authentication with certificates in SAF
# Users logging in with name "-" need SAF certificate
#      IdentityDispatchUsers      -
#
# All users logging in need SAF certificate
#      IdentityDispatchUsers      .*
#
#      AuthPublicKey.Cert.ValidationMethods      saf
#
# Certificate is also validated in ssh-certfd
#      AuthPublicKey.Cert.ValidationMethods      saf,tectia
#
# Client must send user certificate
#      AuthPublicKey.Cert.Required      no
#
#      AuthorizationEkProvider      "zos-saf:KEYS(ID(%UU) RING(%UU))"
#      AuthorizationEkProvider      "zos-saf:[USERNAME=%U UID=%IU GID=%IG]"
#      AuthorizationEkInitStringMapper      /home/SSHD2/mapper.sh
#      AuthorizationEkInitStringMapperTimeout 0      # 0 = Timeout disabled
#
# To enable authentication time password changing (instead of the old
# forced command style), uncomment the following line:
#
#      AuthPassword.ChangePlugin      ssh-passwd-plugin

# (this will also be used by the "password" submethod in
# keyboard-interactive).

## Host restrictions

#      AllowHosts      localhost, example\.com, friendly\.example
#
## Next one matches with, for example, taulu.foobar.com, tuoli.com, but
## not tuolil.com. Note that you have to input string "\." when you want it
## to match only a literal dot. You also have to escape "," when you
## want to use it in the pattern, because otherwise it is considered a list
## separator.
##
##      AllowHosts      t...l.\..*
##
## The following matches any numerical IP address (yes, it is cumbersome)

```

```

##          AllowHosts      ([[:digit:]]{1\,,3}\.){3}[[[:digit:]]{1\,,3}
##
## Same thing is achieved with the special prefix "\i" in a pattern.
## This means that the pattern is only used to match IP addresses.
##
## Using the above example:
##
##          AllowHosts      \i.* 
##
## You can probably see the difference between the two.
##
## Also, you can use subnet masks, by using prefix "\m"
##
##          AllowHosts      \m127.0/8
## and
##          AllowHosts      \m127.0.0.0/24
##
## would match localhost ("127.0.0.1").
##
#          DenyHosts      evil\.example, aol\.example
#          AllowSHosts     trusted\.host\.example
#          DenySHosts      not\.quite\.trusted\.example

## User restrictions
# User and group names must be in uppercase.

#          AllowUsers      SJ.* ,S[[[:digit:]]* ,S(JL|AMZA)
#          DenyUsers      SKUUPPA,WAREZDUDE,31373
#          DenyUsers      DON@example\.org
#          AllowGroups     STAFF,USERS
#          DenyGroups      GUEST,ANONYMOUS
#          PermitRootLogin yes
#          PermitRootLogin nopwd

## Chrooted environment
# User and group names must be in uppercase.

#          ChRootUsers     ANONYMOUS,FTP,GUEST
#          ChRootGroups     SFTP,GUEST

## Subsystem definitions

# Subsystems do not have defaults, so this is needed here (uncommented).
#          subsystem-sftp      sftp-server
#          subsystem-sftp      /opt/tectia/libexec/sft-server-g3
# Also internal SFTP subsystem can be used.
#          subsystem-sftp      internal://sftp-server

## Subconfiguration
# There are no default subconfiguration files. When specified the last

```

```

# obtained keyword value will prevail. Note that the host-specific files
# are read before the user-specific files.
# User and group names must be in uppercase.

# Following matches (from) any host:
#
#      HostSpecificConfig .* /opt/tectia/etc/subconfig/host_ext.example
#
# Following matches to subnet mask:
#
#      HostSpecificConfig \m192.168.0.0/16 \
#/opt/tectia/etc/subconfig/host_int.example
#
# Following matches to users from ssh.com that have two character
# username or username is Sjl and belong to group WHEEL or WHEEL[0-9]:
#
#      UserSpecificConfig (..|Sjl)%WHEEL[[:digit:]]?@ssh\..com \
#/opt/tectia/etc/subconfig/user.example
#
# Following matches to the user ANONYMOUS from any host:
#
#      UserSpecificConfig ANONYMOUS@.* \
#/opt/tectia/etc/subconfig/anonymous.example

```

B.2 Default ssh_certd_config Configuration File

The default ssh_certd_config configuration file is shown below. For descriptions of the configuration options, see [ssh_certd_config\(5\)](#)

```

## SSH CONFIGURATION FILE FORMAT VERSION 1.1
## REGEX-SYNTAX egrep
## end of metaconfig
## (leave above lines intact!)
## ssh_certd_config
## &fullname; - Certificate Validator Configuration File ##

UseSSHD2ConfigFile                      sshd2_config

## General

#      VerboseMode          no
#      QuietMode            no
#      SyslogFacility        AUTH
#      RandomSeedFile        /opt/tectia/etc/random_seed

## Certificate configuration

#      CertCacheFile        /var/spool/ssh-certd-cache
#      SocksServer           socks://mylogin@socks.example.com:1080
#      UseSocks5              no

```

```
#      OCSPResponderURL      http://example.com:8090/ocsp-1/
#      LdapServers            ldap://example.com:389

## X.509 certificate of the root CA which is trusted when validating
# user certificates.

#      Pki                  ca-certificate,use_expired_crls=3600
#      PkiDisableCrls        no
#      Mapfile               ca-certificate.mapfile

## External key provider for fetching root CA X.509 certificates
# from RACF or equivalent. The certificates found from the specified
# ring(s)/label(s) are trusted when validating user certificates.

#      PkiEkProvider         "zos-saf:KEYS(ID(SSH2) RING(SSH-PKI))"
#      PkiDisableCrls        no
#      Mapfile               ca-certificate.mapfile

## CRL autoupdate

#      CrlAutoUpdate         yes,update_before=30,min_interval=30

## CRL manual update

#      CrlPrefetch           3600 ldap://example.com/
```

Appendix C IPv6 Support on Tectia Server and client tools for IBM z/OS

Tectia Server and client tools for IBM z/OS version 6.3 and later support IPv6. The products should function correctly in properly configured:

- IPv4-only networks
- IPv6-only networks
- Mixed IPv4 and IPv6 networks.

This has impact on several areas where hosts or addresses may be defined.

The purpose of this appendix is to provide an overview of the configuration of Tectia Server and client tools for IBM z/OS to use IPv6. We first discuss the server (in [Section C.1](#)), then the two areas relevant to client operations, the Connection Broker (in [Section C.2.1](#)) and the client itself (in [Section C.2.2](#)). Finally, some examples of tunneling involving IPv6 are discussed (in [Section C.2.3](#)).

C.1 Server Configuration and Use

In terms of how IPv4 and IPv6 addresses are supported, the server, `sshd2`, is managed by the following keywords in the `sshd2_config` configuration file:

`AddressFamily { inet | inet6 | any }`

This keyword specifies which address families may be used. It may be supplied exactly once or be omitted.

Valid values for `AddressFamily` are:

- `inet` (*default*): Accepts IPv4 addresses only. IPv6 addresses are ignored.
- `inet6`: Accepts IPv6 addresses only.
- `any`: Accepts both IPv4 and IPv6 addresses.

The command-line options `-4` and `-6` correspond to `inet` and `inet6`. If the command-line options are specified, they override the configuration keyword.

If no configuration keyword or command-line option is supplied, the default `inet` is used.

`ListenAddress { IPv4 address | IPv6 address } [port]`

This keyword specifies the network interface(s) on which the server will listen. It may be supplied multiple times, or be omitted:

- If `ListenAddress` is omitted, **sshd2** listens on the IPv4 `0.0.0.0` address or the IPv6 `::` address, or both, depending on the address family selected as above.
- Multiple listening sockets are opened in the order given by the sequence of `ListenAddress` keywords found.

Listen addresses must accord with the `AddressFamily` specification: an address ruled out by the address family selected will be ignored.

Optionally, the port on which to listen may be specified here, thus overriding any `Port` configurations and the default port 22.

The command-line option `-o ListenAddress='ip-address [port]'` may also be used to specify interfaces on which the server is to listen. These are additional to any interfaces specified using configuration keywords. Each `-o ListenAddress` option must be followed by one address-port definition, consisting of an IPv4 or IPv6 address followed by a space, and an optional port number. If the port is missing, the last `Port` configuration keyword or the default port 22 is used.

Note that the `-p` port number option will override any port number specified via the configuration keyword `Port` or `ListenAddress`, but it does not affect any port numbers supplied with the `-o ListenAddress` option.

An IPv6 address may be either a link-local address or a global address; the server will listen all scopes of a link-local address if one is specified.

The following table demonstrates some of the allowed and invalid combinations of the above-mentioned configuration keywords and command-line options, and their resultant effect:

Address Family	<code>-4</code> / <code>-6</code>	Listen Address	<code>-o</code> <code>ListenAddress</code>	Listen on interface(s), port(s)
*	<code>-4</code>	none	<code>127.0.0.1</code>	<code>127.0.0.1</code>
*	<code>-4</code>	none	<code>127.0.0.1 23</code>	<code>127.0.0.1:23</code>
*	<code>-4</code>	none	<code>::1</code>	error
*	<code>-4</code>	none	<code>any</code>	<code>0.0.0.0:22</code>
*	<code>-4</code>	none	<code>any 23</code>	<code>0.0.0.0:23</code>
*	<code>-4</code>	none	<code>none</code>	<code>0.0.0.0:22</code>
*	<code>-6</code>	none	<code>0.0.0.0</code>	error
*	<code>-6</code>	none	<code>::1</code>	<code>[:1]:22</code>

*	-6	none	127.0.0.1	error
*	-6	none	::	[::]:22
*	-6	none	any	[::]:22
*	-6	none	none	[::]:22
any	-6	0.0.0.0	none	0.0.0.0:22
any	none	::1	127.0.0.1 23	[::1]:22, 127.0.0.1:23
any	none	::1 23	none	[::1]:23
any	none	127.0.0.1	10.1.1.1 23	127.0.0.1:22, 10.1.1.1:23
any	none	127.0.0.1	::1	127.0.0.1:22, [::1]:22
any	none	127.0.0.1 23	none	127.0.0.1:23
any	none	127.0.0.1	fe80::100:10 23	127.0.0.1:22, [fe80::100:10]:23
any	none	127.0.0.1	none	127.0.0.1:22
any	none	::1	none	[::1]:22 ①
any	none	[::]	none	0.0.0.0:22, [::]:22
any	none	none	::	0.0.0.0:22, [::]:22
any	none	none	::1	[::1]:22
any	none	none	127.0.0.1	127.0.0.1:22
any	none	none	127.0.0.1 23	127.0.0.1:23
any	none	none	any	0.0.0.0:22, [::]:22
any	none	none	any 23	0.0.0.0:23, [::]:23
any	none	none	none	0.0.0.0:22, [::]:22
inet6	-4	::1	none	[::1]:22
inet6	-6	0.0.0.0	none	error
inet6	none	::1	:: 23	[::1]:22, [::]:23
inet6	none	::1 23	::	[::1]:23, [::]:22
inet6	none	::1 23	127.0.0.1	[::1]:23
inet6	none	::1 23	fe80::100:10	[::1]:23, [fe80::100:10]:22
inet6	none	::1 23	none	[::1]:23
inet6	none	127.0.0.1	::	[::]:22
inet6	none	127.0.0.1	none	error
inet6	none	::1	none	[::1]:22 ②
inet6	none	none	127.0.0.1	error ③
inet6	none	none	:: 23	[::]:23
inet6	none	none	fe80::100:10 23	[fe80::100:10]:23
inet6	none	none	none	[::]:22
inet	-6	0.0.0.0	none	0.0.0.0:22
inet	none	::1	127.0.0.1	127.0.0.1:22
inet	none	127.0.0.1	10.1.1.1 23	127.0.0.1:22, 10.1.1.1:23
inet	none	127.0.0.1	::	127.0.0.1:22
inet	none	127.0.0.1 23	10.1.1.1 22	127.0.0.1:23, 10.1.1.1:22
inet	none	127.0.0.1	:: 23	127.0.0.1:22
inet	none	127.0.0.1 23	none	127.0.0.1:23
inet	none	127.0.0.1	none	127.0.0.1:22
inet	none	::1	none	error
inet	none	none	::	error
inet	none	none	none	0.0.0.0:22
none	-4	::1	127.0.0.1	127.0.0.1:22
none	-4	::1	none	error
none	-6	0.0.0.0	none	error
none	none	none	[::] 23	error
none	none	none	any	0.0.0.0:22

none	none	none	any 23	0.0.0.0:23
none	none	none	::	error
none	none	none	none	0.0.0.0:22

①② Subsequent `sshg3 ::1#22` succeeds; `sshg3 127.0.0.1#22` fails.

③ `AddressFamily` is overridden if explicit address is given.

Running the server with the `verbose` option may help to clarify what interfaces are being listened on. See `sshd2(8)` and `sshd2_config(5)` for more details, as well as for where hosts may be specified or matched by IPv6 address (e.g. `sshd2_config` keywords `AllowHosts`, `AllowSHosts`, `ProxyServer`, etc.).

C.2 Client Configuration and Use

C.2.1 Connection Broker

With respect to IPv6, the client is affected by the Connection Broker configuration as given in the following files:

- Default configuration file (optional): `/opt/tectia/etc/ssh-tectia/auxdata/ssh-broker-ng/ssh-broker-config-default.xml`
- Global configuration file (optional): `/opt/tectia/etc/ssh-broker-config.xml`
- User-specific configuration file (optional): `$HOME/.ssh2/ssh-broker-config.xml`
- A configuration file explicitly specified by the `-f` command-line option.

The common DTD for all these XML configuration files is: `/opt/tectia/etc/ssh-tectia/auxdata/ssh-broker-ng/ssh-broker-ng-config-1.dtd`. You can see the contents of the DTD also in the *Tectia Server for IBM z/OS User Manual*.

All of the above-mentioned configuration files are optional; if none are provided, the defaults, as defined in the DTD, are used. Files later in the above list override settings in their predecessors, if any.

For the purposes of IPv6 support, the `address-family` sub-element of the `default-settings` element is the first consideration:

```
<!-- Both ipv4 and ipv6 are enabled by default -->
<!ENTITY default-address-family-type          "any">

<!-- address-family mode setting ipv4 & ipv6-->
<!ELEMENT address-family          EMPTY>
<!ATTLIST address-family
      type      (any|inet|inet6) "&default-address-family-type;">
```

These lines in the DTD mean that `address-family` may be coded as `any`, `inet`, or `inet6` and that if not specified, it defaults to `any`. Note that the default on the client side is the more permissive setting to support both IPv4 and IPv6, whereas the server defaults are generally more conservative, supporting IPv4 only, in the absence of explicit instructions.

In many other places in the Connection Broker configuration, such as in tunnel definitions, IP addresses or host names may be specified. Depending on the `address-family` chosen, IPv4 or IPv6 addresses are allowable.

C.2.2 Client

Client refers to **sshg3**, **scpg3**, **sftp3**, and several utilities such as **ssh-keyfetch-g3** and **ssh-keydist-g3**. Their behavior in terms of IP `address-family` may be modified by:

- The Connection Broker configuration through which the clients communicate with servers (discussed above)
- The use of a connection profile defined in the Connection Broker configuration
- Command-line options

The `host` attribute of a connection profile may specify either an IP address or a host name. Whether IPv4 or IPv6 is allowed and whether lookups of host names use IPv4 or IPv6 addresses is controlled by the address family selected for the connection, based on the evaluation of the Connection Broker configurations and broker and client command-line options. In fact, this is the general rule whenever client configurations or operands refer to an address or host, so with that in mind it should be possible to deduce the effect of any such reference in terms of address family.

Command-line options for the client that affect the use of IPv4 or IPv6 are, in the first instance, the `-4` and `-6` options. These affect the process of DNS lookup, having a restrictive effect on the `getaddrinfo()` library function used to resolve hosts. In the absence of either option, the default `unspec` address family is used, meaning that address resolution may return both IPv4 and IPv6 addresses. The `-4` option results in only IPv4 addresses being returned, while `-6` results in only IPv6 addresses. Note that these options control just the action of `getaddrinfo()`: they determine how names and addresses are resolved for the purpose of the client making connections; they do not determine the address family in use, which is instead controlled at the Connection Broker level.

Addresses or hosts may be used as operands by clients as connection targets and tunnel listen interfaces and targets. Explicit IPv4 or IPv6 addresses may be coded, depending on the configuration and options in effect, and host names are likewise resolved to IPv4 or IPv6 addresses or both. Clients may connect to a server listening on a link-local IPv6 address, but only if the correct `scope_id` is supplied, e.g., `fe80::100:00%1`, etc.

The following table demonstrates some of the possible combinations and their effects:

Address Family	-4 / -6 option	Address operand	Connect to
----------------	----------------	-----------------	------------

*	*	none	error
none	none	localhost	first resolved usable address
none	-4	localhost	127.0.0.1
none	-6	localhost	::1 (fails unless resolves as IPv6)
none	none	127.0.0.1	127.0.0.1
none	-4	127.0.0.1	127.0.0.1
none	-6	127.0.0.1	127.0.0.1
none	none	::1	::1
none	-4	::1	::1
none	-6	::1	::1
none	*	fe80::100:00	error (link local requires scope)
none	*	fe80::100:00%1	fe80::100:00%1
none	*	fd02:200:bb::4	fd02:200:bb::4 (global scope address)
'any'			see AddressFamily none
'inet'	none	localhost	first resolved usable address
'inet'	-4	localhost	127.0.0.1
'inet'	-6	localhost	::1 (fails unless resolves as IPv6)
'inet'	*	::1	::1
'inet'	*	fe80::100:00	error (link local requires scope)
'inet'	*	fe80::100:00%1	fe80::100:00%1
'inet6'	none	localhost	::1 (fails unless resolves as IPv6)
'inet6'	-4	localhost	127.0.0.1
'inet6'	-6	localhost	::1 (fails unless resolves as IPv6)
'inet6'	*	127.0.0.1	127.0.0.1
'inet6'	*	::1	::1
'inet6'	*	10.0.0.1	10.0.0.1
'inet6'	*	fe80::100:00	error (link local requires scope)
'inet6'	*	fe80::100:00%1	fe80::100:00%1
*	*	fd02:200:bb::4	fd02:200:bb::4 (global scope address)

For the sake of brevity, this table uses the terms localhost, 127.0.0.1, and ::1, but of course localhost might be configured as 127.0.0.2, ::2, etc. The idea is that other types of address may be extrapolated from those given here.

C.2.3 Tunneling

Tunneling involves several addresses, as in, for example:

```
sshg3 -L 2001:[::1]:2002 127.0.0.1
```

meaning "connect to the default SSH port on 127.0.0.1 and start a tunnel on localhost:2001 which will forward to [::1]:2002", or:

```
sshg3 -R 1234:remotehost:22 username@sshserver
```

meaning "connect to sshserver and start a tunnel listening on localhost:1234 forwarding to remotehost:22", where localhost refers to the machine on which the tunnel is being created. In this case, the AddressFamily in effect determines whether IPv4 or IPv6 is used.

Defining the `listen` part of a tunnel follows the same rules with respect to IP addressing as does listening on the server. The connection end of the tunnel is defined according to the same rules as any client connection.

There is nothing new to take into account for IPv6 and tunnels apart from the points mentioned for servers and clients. Tunnels can be established in as complex a way as desired and IPv4 and IPv6 can be mixed as wished.

The following examples illustrate some tunnel commands and their effects. In the examples, `local1` and `remote1` have both IPv4 and IPv6 connectivity; `remote2` has IPv4 only:

```
local1           172.29.127.54      fd02:2382:bb5a::54
remote1          172.29.127.36      fd02:2382:bb5a::36
remote2          172.29.127.227
```

Example 1: Local tunnel with IPv4 and IPv6

```
local1$ sshg3 -6 -L [::1]:4444:remote2:333 remote1#22422 ❶

local1$ netstat -tln
tcp      0      0 ::1:4444          ::*:              LISTEN

local1$ sshg3 localhost#4444 ❷

remote2$ netstat -a ❸
SSHD2    00000010 0.0.0.0..333      0.0.0.0..0          Listen
SSHD2    000005FA 172.29.127.227..333    172.29.127.36..1160  Establish

remote1$ netstat -a ❹
SSHD22   00000382 Establish
  Local Socket: 172.29.127.36..1160
  Foreign Socket: 172.29.127.227..333
SSHD25   0000030E Listen
  Local Socket: ::..22422
  Foreign Socket: ::..0
SSHD26   0000037D Establish
  Local Socket: fd02:2382:bb5a::36..22422
  Foreign Socket: fd02:2382:bb5a::54..44268
```

- ❶ Connect to port 22422 on `remote1`, preferring to resolve the host name to an IPv6 address, and opening a tunnel listening on port 4444 on this host's local `::1` interface, and which connects to port 333 on host `remote2`.
- ❷ Still on `local1`, connect to `localhost`, port 4444.
- ❸ This will take us to `remote2`, where the `netstat` command shows a connection from `remote1` to port 333.
- ❹ On `remote1`, the `netstat` command shows the incoming connection from `local1` to the server on port 22422 over IPv6, and the outgoing connection over IPv4 to port 333 on `remote2`.

Example 2: Remote tunnel with IPv4 and IPv6

```
local1$ sshg3 -R [fd02:2382:bb5a::36]:3333:remote2:333 remote1#22422 ❶

remote1$ netstat -c SERVER ❷
SSHD21    00000375 Listen
  Local Socket: fd02:2382:bb5a::36..3333

remote1$ sshg3 -p3333 fd02:2382:bb5a::36 ❸

remote2$ netstat -a ❹
SSHD2    000005F5 172.29.127.227..333    172.29.127.54..39631    Establsht
```

- ❶ Connect to `remote1` via port 22422 and open a tunnel on the interface with address `fd02:2382:bb5a::36` and port 3333.
- ❷ The `netstat` command on `remote1` shows this listening socket. The other end of the tunnel goes to port 333 on `remote2`.
- ❸ A client on `remote1` connects to `[fd02:2382:bb5a::36]:3333` and ends up on `remote2`.
- ❹ The `netstat` command on `remote2` shows an established IPv4 connection between `remote2` and `local1`.

Appendix D Running the Server and SOCKS Proxy on Multiple TCP/IP Stack z/OS

Multiple instances of Tectia Server for IBM z/OS and Tectia SOCKS Proxy can be run on different TCP/IP stacks. In the following sections we give instructions for running two Servers or SOCKS Proxies on a dual stack z/OS machine, but the described setup can be extended to accommodate environments with more than two TCP/IP stacks.

D.1 Running Two Servers on a Dual TCP/IP Stack

In this example we have two started tasks for two **sshd2** servers: **SSHD2** and **SSHD2B**.

1. Configuration Files

Create two separate configuration files for the two servers to maintain their PID files distinct. In this example we have files `/opt/tectia/etc/sshd2_config` and `/opt/tectia/etc/sshd2b_config`.

2. PID Files

The only difference between the two configuration files is the value of the **pidfile** keyword. It specifies the file where the process ID of the Server is written. For example, for **SSHD2** in `/opt/tectia/etc/sshd2_config` the **PidFile** keyword has the default value:

```
PidFile      /opt/tectia/var/run/sshd2_22.pid
```

For **SSHD2B** in `/opt/tectia/etc/sshd2b_config` we specify the PID file `sshd2b_22.pid`:

```
PidFile      /opt/tectia/var/run/sshd2b_22.pid
```

3. TCP/IP Stacks

In this example started tasks **SSHD2** and **SSHD2B** use TCP/IP stacks **TCPIP** and **TCPIPB**, respectively.

You can specify the TCP/IP stack using the environment variable `_BPXK_SETIBMOPT_TRANSPORT`. You can set it in the `STDENV DD` for `BPXBATxx` jobs, for example for `SSHD2B`:

```
//SSHD2B  PROC  OPTS=' -f /opt/tectia/etc/sshd2b_config' ①
//TECTIA  EXEC  PGM=BPXBATSL,REGION=0M,TIME=NOLIMIT,
//          PARM=( 'PGM /opt/tectia/sbin/sshd2 -F &OPTS' )
//STDENV  DD   DSN=<HLQ>.V676.PARMLIB(SSHENV),DISP=SHR
//          DD   DSN=<HLQ>.V676.PARMLIB(TCPIPB),DISP=SHR ②
//STDOUT   DD   SYSOUT=*
//*STDERR   DD   SYSOUT=*
//STDIN    DD   DUMMY
//          PEND
```

- ① The `sshd2` configuration file is specified with the `-f` option.
- ② The `_BPXK_SETIBMOPT_TRANSPORT` environment variable is set in `<HLQ>.V676.PARMLIB(TCPIPB)`:

```
_BPXK_SETIBMOPT_TRANSPORT=TCPIPB
```

(Replace `TCPIPB` with the name of your TCP/IP stack.)

D.2 Running Two SOCKS Proxies on a Dual TCP/IP Stack

In this example we have two users, `SSHSP` and `SSHSPB`, and two started tasks, `SSHSP` and `SSHSPB`, for two Tectia SOCKS Proxies:

- **SSHSP:** this started task is assigned to user `SSHSP` and uses stack `TCPIP`:

```
//STDENV  DD   DSN=<HLQ>.V676.PARMLIB(SSHENV),
//          DISP=SHR
//          DD   DSN=<HLQ>.V676.PARMLIB(TCPIP),DISP=SHR ①
```

- ① The TCP/IP stack name is specified using the `_BPXK_SETIBMOPT_TRANSPORT` environment variable that is set in `<HLQ>.V676.PARMLIB(TCPIP)`:

```
_BPXK_SETIBMOPT_TRANSPORT=TCPIP
```

- **SSHSPB:** this started task is assigned to user `SSHSPB` and uses stack `TCPIPB`:

```
//STDENV  DD   DSN=<HLQ>.V676.PARMLIB(SSHENV),
//          DISP=SHR
//          DD   DSN=<HLQ>.V676.PARMLIB(TCPIPB),DISP=SHR
```

The IP address of the SOCKS Proxy in stack `TCPIP` is `198.51.100.1`, and the IP address of the SOCKS Proxy in stack `TCPIPB` is `198.51.100.2`. The SOCKS Proxies are used to connect to remote servers at `203.0.113.1` and `203.0.113.2`.

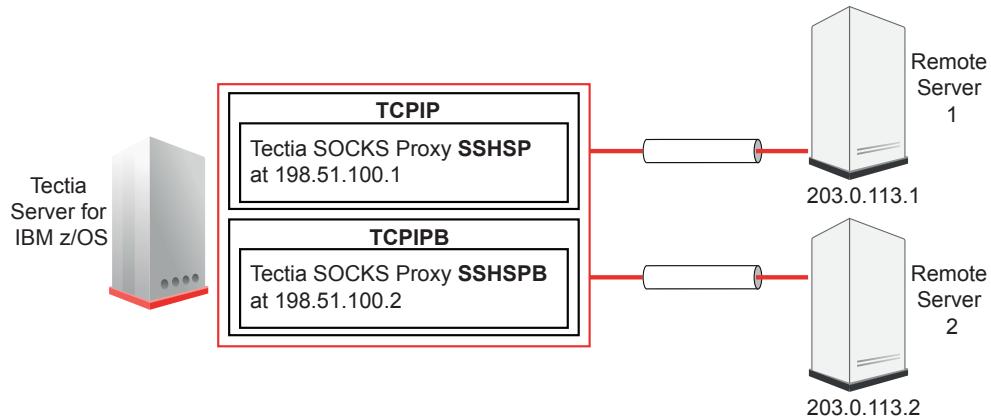


Figure D.1. Dual TCP/IP stack setup for Tectia SOCKS Proxy

You can run the two SOCKS proxies on a dual stack z/OS in two ways:

- Using two SOCKS Proxy configuration files with different network listeners (see [Example D.1](#))
- Using one global SOCKS Proxy configuration file, and creating network listeners on both TCP/IP stacks' loopback address (see [Example D.2](#)). You can also use two separate SOCKS Proxy configuration files if you want to have different rules for the other stack connections.

Example D.1. Two configuration files with different network listeners

Add the following elements to the SSHSP configuration file (/u/SSHSP/.ssh2/ssh-socks-proxy-config.xml):

```
...
<profile name="dynamic-ftp"
    id="id1"
    host=""
    port="22"
    user="">>
</profile>
...
<!-- SOCKS proxy needs its own listener for SOCKS. -->
<tunnel type="socks-proxy"
    listen-address="198.51.100.1"
    listen-port="1080"
    dst-port="0"
    profile=""/>
...
<rule    ip-address="203.0.113.1"
    ports="21"
    action="ftp-proxy"
    profile-id="id1"
    username-from-app="YES"
    hostname-from-app="YES"
    fallback-to-plain="NO" />
...

```

Add the following elements to the SSHSPB configuration file (/u/SSHSPB/.ssh2/ssh-socks-proxy-config.xml):

```
...
<profile name="dynamic-ftp"
    id="id1"
    host=""
    port="22"
    user="">>
</profile>
...
<!-- SOCKS proxy needs its own listener for SOCKS. -->
<tunnel type="socks-proxy"
    listen-address="198.51.100.2"
    listen-port="1080"
    dst-port="0"
    profile=""/>
...
<rule    ip-address="203.0.113.2"
    ports="21"
    action="ftp-proxy"
    profile-id="id1"
    username-from-app="YES"
    hostname-from-app="YES"
```

```
    fallback-to-plain="NO" />
...

```

Define the IP addresses of the SOCKS Proxies in the `socks.conf` file:

```
sockd @=198.51.100.1 203.0.113.1 255.255.255.0
sockd @=198.51.100.2 203.0.113.2 255.255.255.0
direct 0.0.0.0 0.0.0.0
```

Example D.2. Network listeners on TCP/IP stacks' loopback address

Add the following elements to the global SOCKS Proxy configuration file (`/opt/tectia/etc/ssh-socks-proxy-config.xml`):

```
...
<profile name="dynamic-ftp"
    id="id1"
    host=""
    port="22"
    user="" />
</profile>
...
<!-- SOCKS proxy needs its own listener for SOCKS. -->
<tunnel type="socks-proxy"
    listen-address="127.0.0.1"
    listen-port="1080"
    dst-port="0"
    profile="" />
...
<rule    ip-address="203.0.113.*"
    ports="21"
    action="ftp-proxy"
    profile-id="id1"
    username-from-app="YES"
    hostname-from-app="YES"
    fallback-to-plain="NO" />
...

```

Create listeners on both TCP/IP stacks' loopback address (127.0.0.1) in the `socks.conf` file:

```
sockd @=127.0.0.1 203.0.113.1 255.255.255.255
sockd @=127.0.0.1 203.0.113.2 255.255.255.0
direct 0.0.0.0 0.0.0.0
```

D.3 Connecting via Different TCP/IP Stacks with Tectia Clients

Note that running multiple Tectia clients simultaneously under the same user ID using different TCP/IP stacks will not work, because they use the same run-on-demand Connection Broker. The Connection Broker opens a socket on a particular TCP/IP stack; the clients (**sftp3**, **scpg3**, **sshg3**) use local UNIX sockets to the Connection Broker.

If you want the clients to open connections to particular stacks, you have to run separate Connection Brokers on each stack, defined using the `_BPXK_SETIBMOPT_TRANSPORT` environment variable:

```
> env _BPXK_SETIBMOPT_TRANSPORT=TCPIPB ssh-broker-g3 -a /tmp/ssh-usernameB/ssh-broker
```

The **ssh-broker-g3** option `-a` starts the Connection Broker so that it listens to the Connection Broker connections on the local address `/tmp/ssh-usernameB/ssh-broker`. If the `/tmp/ssh-usernameB/` directory does not already exist, you have to first create it:

```
> mkdir /tmp/ssh-usernameB
```



Note

If you want to set the TCP/IP stack permanently, you can do it by setting the `_BPXK_SETIBMOPT_TRANSPORT` environment variable to the stack name in the client's `.profile` file.

Use the `SSH_SECSH_BROKER` environment variable to point to the UNIX socket the Connection Broker is listening on:

```
> env SSH_SECSH_BROKER=/tmp/ssh-usernameB/ssh-broker sshg3 User@Server
```

You can use the **netstat** command to display all active connections for TCPIPB:

```
> netstat -a -p TCPIPB
```

Appendix E Console Messages

This appendix lists the console messages generated by Tectia Server for IBM z/OS.

The console messages generated by the SSH server (**sshd2**) and Certificate Validator (**ssh-certd**) are listed in [Table E.1](#).

The console messages generated by the SOCKS Proxy (**ssh-socks-proxy**) are listed in [Table E.2](#).

The messages are ordered by message code.

Table E.1. Console messages generated by the SSH server and Certificate Validator

Code	Message	Description
SSZ0001I	<program_path_name> J=<job_name>, A=<ASID>, P=<PID> ready	Process started Displayed when a new process is started.
SSZ0002W	Command <command> unrecognised	Command unrecognised Command <command> was not recognized.
SSZ0003I	Command <command> accepted	Command accepted Command <command> was accepted.
SSZ0004I	Tectia Server for z/OS <version>	Version Displayed as a response to the command VERSION.
SSZ0005I	Dispatching signal to <process>=<PID> (<program_path_name>)	Stop / Restart / Reload Displayed as a response to the commands STOP, RESTART and RELOAD. <process> is C or S, indicating a child or server process, respectively. <PID> is the identification number of the process the termination signal is dispatched to.
SSZ0006I	Task <program_name> started	Task started Displayed when the server is started using the START command.
SSZ0007W	Command option <option> unrecognised	Command option unrecognised Command option <option> was not recognized.
SSZ0008I	VC branch: <branch>	Version control information: branch Displayed as a response to the command VERSION.
SSZ0009I	VC revision: <revision>	Version control information: revision Displayed as a response to the command VERSION.
SSZ0010W	Invalid access attempt. Disabled Revoked Undefined user=<user_ID> IP=<IP_address>	Invalid access attempt The SSH session will be disconnected during the authentication phase if the user ID used to log in is: <ul style="list-style-type: none">• <i>Disabled</i> (user ID is configured with a UID value less than zero)• <i>Revoked</i> (user ID is marked as revoked in the RACF database)• <i>Undefined</i> (user ID is either not defined in the RACF database, or it does not have an OMVS segment)

Code	Message	Description
SSZ0011W	Maximum TcpListenRate reached	Maximum TcpListenRate reached The current TCP listen rate specified in sshd2_config TcpListenRate keyword exceeded.
SSZ0012W	CPU limit (<current_usage>, <maximum_usage>) exceeded (. getrlimit rc=<return_value>)	CPU limit exceeded The current CPU usage of sshd2 task exceeded the maximum usage. The task will be terminated. If system service getrlimit fails to provide the current and maximum usage value, the return_value provided the possible failure causes.
SSZ0013W	ICSF Random number generator is not available	ICSF Random number generator is not available ICSF Random number generator service is not available. ICSF task has problem to provide random number service.
SSZ0014E	Error on listening tcp port: <port_number>	Error on listening tcp port: port_number There is error on listening tcp port number.
SSZ0015E	Failed to take a socket	Failed to take a socket Server failed to take a socket.
SSZ0016E	<CEE abend message>	CEE Abend Message SSZ0016E message contains the CEE abend message.
SSZ0017E	Received signal <signal_number> . Exiting	Received signal Server received exiting signal from the system.
SSZ0018E	Syscall <syscall> failed: <errno> <error_string>	Syscall failed Server system call failed.
SSZ0019E	Default configuration file /opt/tectia/etc/sshd2_config does not exist	Default configuration file does not exist Error finding the default server configuration file in default path.
SSZ3050E	Error creating local stream directory	Error creating local stream directory The sft_server_g3 is not able to create a local stream file to communicate with sshd2 in /tmp/ssh-USER-NAME

Table E.2. Console messages generated by the SOCKS Proxy and Connection Broker

Code	Message	Description
SSZ3001I	<program_path_name> J=<job_name>, A=<ASID>, P=<PID> ready	Process started Displayed when a new process is started.
SSZ3002W	Command <command> unrecognised	Command unrecognised Command <command> was not recognized.
SSZ3003I	Command <command> accepted	Command accepted Command <command> was accepted.
SSZ3004I	Tectia Client for z/OS <version>	Version Displayed as a response to the command VERSION.
SSZ3005I	Dispatching signal to <process>=<PID> (<program_path_name>)	Stop / Restart / Reload Displayed as a response to the commands STOP, RESTART and RELOAD. <process> is C or S, indicating a child or server process, respectively. <PID> is the identification number of the process the termination signal is dispatched to.
SSZ3006I	Task ssh-socks-proxy started	Task started Displayed when the SOCKS Proxy is started.
SSZ0007W	Command option <option> unrecognised	Command option unrecognised Command option <option> was not recognized.
SSZ3008I	VC branch: <branch>	Version control information: branch Displayed as a response to the command VERSION.
SSZ3009I	VC revision: <revision>	Version control information: revision Displayed as a response to the command VERSION.
SSZ3010W	Invalid access attempt. Disabled Revoked Undefined user=<user_ID> IP=<IP_address>	Invalid access attempt The SSH session will be disconnected during the authentication phase if the user ID used to log in is: <ul style="list-style-type: none"><i>Disabled</i> (user ID is configured with a UID value less than zero)<i>Revoked</i> (user ID is marked as revoked in the RACF database)<i>Undefined</i> (user ID is either not defined in the RACF database, or it does not have an OMVS segment)
SSZ3011W	Initialisation is in progress	Initialisation is in progress Program initialisation is in progress.

Code	Message	Description
SSZ3012W	Internal error	Internal error Program has reached an internal error.
SSZ3013I	No open connections	No open connections SOCKS Proxy or Connection Broker do not have any open connections.
SSZ3014I	<connection_id>. <host_name> port <port_number> as <user_name> Open since <time> <channel_count> open channel	Connection status Connection status of SOCKS Proxy or Connection Broker. Displays connection ID, server IP address, username, starting time of the connection and channel count.
SSZ3015I	End	End of SSZ message group SSZ3015I message is displayed at the end of SSZ message groups.
SSZ3016I	Broker running at '/tmp/ssh-SSH-SP/ssh-socks-proxy' (pid <pid>)	Address of the running SOCKS Proxy Displayed as a response to the command STATUS.
SSZ3017I	System configuration file: /opt/tectia/etc/ssh-socks-proxy- config.xml	Path to the SOCKS Proxy configuration file Displayed as a response to the command STATUS.
SSZ3018I	Agent socket path: /tmp/ssh-SSH- SP/ssh-socks-proxy-aa	Agent socket path Displayed as a response to the command STATUS.
SSZ3019I	Key upload log: /u/ssh- sp/.ssh2/keylog (not initial- ized)	Path to the key upload log Displayed as a response to the command STATUS.
SSZ3020I	FIPS 140-2 certification mode <en/dis> abled	FIPS 140-2 certification mode status Displayed as a response to the command STATUS.
SSZ3023I	<number> open connections, <number> clients	Number of open connections and clients Displayed as a response to the command STATUS.
SSZ3025I	Key exchange: <algorithm-list>	Supported key exchange algorithms Displayed as a response to the command STATUS ALGORITHMS.
SSZ3026I	Hostkey: <algorithm-list>	Supported host key algorithms Displayed as a response to the command STATUS ALGORITHMS.
SSZ3027I	Ciphers: <algorithm-list>	Supported ciphers Displayed as a response to the command STATUS ALGORITHMS.
SSZ3028I	MACs: <algorithm-list>	Supported MACs Displayed as a response to the command STATUS ALGORITHMS.

Code	Message	Description
SSZ3029I	Compressions: <algorithm-list>	Supported compression algorithms Displayed as a response to the command STATUS ALGORITHMS.
SSZ3030I	User authentications: <authentication-methods>	Supported user authentication methods Displayed as a response to the command STATUS ALGORITHMS.
SSZ3031I	Statistics: Total bytes sent: <N> Total bytes received: <N> Total connections opened: <N> Total clients opened: <N> Total client connections: <N>	Statistics for the running SOCKS Proxy Displayed as a response to the command STATUS.
SSZ3032I	Connection id needed	Connection ID needed Connection ID was not supplied to SOCKS Proxy or Connection Broker.
SSZ3033I	<host_name> port <port_number> as <user_name> (# <user_id>) Server version: <server_version> Open since <time> Opened by client <client_id> (pid: <pid>)	Connection information Displays connection information.
SSZ3034I	Server hostkey algorithm: <algorithm> Server hostkey: <hostkey> Server authentication: <authentication-method> User authentication methods offered: <authentication-methods> User authentications completed: <authentication-methods> Failed user authentications: <authentication-methods>	Server Hostkey and Authentication methods Displays authentication information.
SSZ3035I	Connection gateway through channel: # <gateway_channel_id>	Connection gateway Displays connection gateway channel ID of SOCKS Proxy or Connection Broker.

Code	Message	Description
SSZ3036I	Session ID: <session_id> Transport cipher: <cipher_c_to_s> (<cipher_s_to_c>) Transport mac: <mac_c_to_s> (<mac_s_to_c>) Transport compressions: <compressions_c_to_s> (<compressions_s_to_c>) Host key algorithm: <algorithm> Kex algorithm: <algorithm> Kex modulus: <modulus> Bytes sent: <N> Bytes received: <N> Completed key exchanges: <N>	Session information Displays useful information related to session.
SSZ3037I	<N> open channel(s)	Channel count Displays open channel count of SOCKS Proxy or Connection Broker.
SSZ3038I	<channel_id>. <channel_type> (<channel_parameters> Open since <time> X11 forwarding <en/dis>abled Agent forwarding <en/dis>abled Character set conversion: <en/dis>abled Remote character set: <character_set> Local character set: <character_set> <N> bytes sent, <N> bytes received Client # <client_id> Forwarder # <forwarder_id>	Channel statistics Displays useful channel statistics.
SSZ3039I	Invalid connection id	Invalid connection ID SOCKS Proxy or Connection Broker received an invalid connection ID.
SSZ3040I	Connection <connection_id> closed	Connection closed Connection ID of closed connection from SOCKS Proxy or Connection Broker.
SSZ3041I	#<channel_id> #<connection_id> <channel_type> <user_name>@ <host_name># <port_number> <parameters>	Condensed Channel information Condensed channel information of SOCKS Proxy or Connection Broker.

Code	Message	Description
SSZ3042E	Restart failed due to out of memory	Restart failed due to out of memory SOCKS Proxy or Connection Broker could not restart due to lack of memory.
SSZ3043E	Restart failed (<errno>)	Restart failed Error message of SOCKS Proxy or Connection Broker after failed restart.
SSZ3044E	Received signal <signal_number> . Exiting	Received signal SOCKS Proxy or Connection Broker received exiting signal from the system.
SSZ3045I	Sftp transaction end: File: <file_name> IP local/remote: <local_ip>:<port_number>/ <remote_ip>:<port_number> Userid: <user_name> Action: <action>(<rc>) Bytes transferred: <N>	SFTP transfer information Displayed after file transfer. The output can be modified through the server config option <i>SftpEndTransferWTO</i>
SSZ3046E	Failed to load exit module <module_name>	Failed to load exit module SOCKS Proxy or Connection Broker failed to load exit module.
SSZ3047I	Pending proto req since <time>	Pending protocol request Protocol request was initiated and pending since time stated.
SSZ3048I	Configuration reload <succeeded/failed> <error_message>	Configuration reload status SOCKS Proxy or Connection Broker configuration reload status. Displays success or failure, if reload fails an error message will be displayed.
SSZ3049I	Error on listening tcp port: <port_number>	Error on listening tcp port SOCKS Proxy or Connection Broker failed to listen on TCP port.
SSZ3050E	Error creating local stream directory	Error creating local stream directory SOCKS Proxy or Connection Broker failed to create local stream directory.
SSZ3051E	<CEE abend message>	CEE Abend Message SSZ3051E message contains the CEE abend message.
SSZ3052E	Syscall <syscall> failed: <errno> <error_string>	Syscall failed SOCKS Proxy or Connection Broker system call failed.
SSZ3053E	Invalid DCB values <dcb_lrecl> :<dcb_blksize> :<dataset_lrecl> for dsn: <dsn_name>	Invalid DCB values DCB values observed by program is different from the dataset definition

Appendix F Log Messages

The log messages generated by Tectia Server for IBM z/OS are listed in the following sections based on their subject matter.

F.1 User Authentication - Common

Authentication failed

```
<method-name> authentication failed. Login to account <login-name> not allowed or account non-existent.
```

Level: warning

Facility: AUTH

The system administrator has denied logging in for the user, or the user is trying to log in using a non-existent account.

Authentication failed, user does not exist

```
User <login-name> does not exist.
```

Level: warning

Facility: AUTH

Authentication failed because the specified user account does not exist.

Root login denied for user

```
root login denied for user '<login-name>'.
```

Level: warning

Facility: AUTH

User tried to login as root (administrator), but system policy does not allow root (administrator) logins at all or with password authentication.

Authentication failed, system policy does not allow user's login

User <login-name>'s login is not allowed due to system policy

Level: warning

Facility: AUTH

Authentication failed because the system policy does not allow the user to log in. The account may be locked or expired, for example.

Authentication failed, user name is on DenyUsers list

User <login-name> is denied login because username matched with the deny list.

Level: warning

Facility: AUTH

Authentication failed because the specified user name is included in the server's denied users list.

Authentication failed, user name not on AllowUsers list

User <login-name> is denied login because allow list exists, and user name was not matched.

Level: warning

Facility: AUTH

Authentication failed because the specified user name is not included in the server's allowed users list.

Authentication not allowed from a host

<method-name> authentication failed. Connection from <hostname> denied. Authentication as user <login-name> was attempted.

Level: warning

Facility: AUTH

The server has determined that the user is not allowed to login from the current host.

Authentication not allowed, unable to reverse map host name

Login not allowed because host's IP address (<ip-address>) could not be mapped to a hostname and reverse mapping is required.

Level: warning

Facility: AUTH

The server could not map the connecting host's IP address to a host name and the configuration option `RequireReverseMapping` is on.

Authentication not allowed, host is on the `DenyHosts` list

Login not allowed because the connecting host (`<hostname>`) is on the server's deny list.

Level: warning

Facility: AUTH

The connecting host is on the server's denied hosts list, so the authentication is not allowed.

Authentication not allowed, host is not on the `AllowHosts` list

Login not allowed because the connecting host (`<hostname>`) is not on the server's allow list.

Level: warning

Facility: AUTH

The connecting host is not on the server's allowed hosts list, so the authentication is not allowed.

F.2 User Authentication - Host-Based

Using host-based authentication denied for a host

Use of `<filename>` denied for `<hostname>`

Level: warning

Facility: AUTH

Use of host-based authentication is denied for the host in server configuration.

Configuration files missing for host-based authentication

`hostbased-authentication (rhosts)` refused for `<login-name>` no `.shosts` or `.rhosts` files and no system-wide files (ie: `/etc/shosts.equiv`)

Level: warning

Facility: AUTH

The required files for host-based authentication are missing.

Home directory missing in host-based authentication

`hostbased-authentication (rhosts)` refused for `<login-name>`: no home directory `<directory>`

Level: warning

Facility: AUTH

The user's home directory does not exist.

Home directory ownership or permissions invalid in host-based authentication

```
hostbased-authentication (rhosts) refused for <login-name>: bad ownership or modes for home directory.
```

Level: warning

Facility: AUTH

If the `StrictModes` option for the server is switched on, then this message means that the user's home directory is not owned by either the user or the root, or that its permission bits are not correct.

.rhosts file ownership or permissions invalid in host-based authentication

```
hostbased-authentication (rhosts) refused for <login-name>: bad modes for <file>
```

Level: warning

Facility: AUTH

If the `StrictModes` option for the server is switched on, then this message means that the user's `.rhosts` file is not owned either by the user or by the root, or that its permission bits are not correct.

Host-based authentication refused for user

```
hostbased-authentication (rhosts) refused: client user <login-name>, server user <login-name>, client host <hostname>.
```

Level: warning

Facility: AUTH

The host-based authentication attempt has failed.

Client's host certificate is not valid in host-based authentication

```
Hostbased: User <login-name>'s client host certificate not valid, error: <error>.
```

Level: warning

Facility: AUTH

The host certificate sent by the client during host-based authentication could not be successfully validated.

Certificate does not contain the client host name in host-based authentication

```
Certificate does not contain client hostname <hostname>.
```

Level: warning

Facility: AUTH

The host certificate sent by the client during host-based authentication does not contain the client's host name.

Certificate could not be decoded in host-based authentication

Received certificate could not be decoded

Level: notice

Facility: AUTH

The host certificate sent by the client during host-based authentication could not be decoded.

Public key could not be extracted from the received certificate in host-based authentication

Could not extract public key from received certificate

Level: notice

Facility: AUTH

Extracting the public key from the received certificate failed during host-based authentication.

Cryptographic operation failed in host-based authentication

Hostbased: Crypto operation failed for public key (for user <login-name>).

Level: warning

Facility: AUTH

Changing the hashing scheme in the public key failed in host-based authentication.

Verifying the signature failed in host-based authentication

Hostbased authentication failed for <login-name>.

Level: warning

Facility: AUTH

Verifying the signature failed in host-based authentication.

Host-based authentication successful

Hostbased authentication for user <login-name> accepted.

Level: notice

Facility: AUTH

Authentication using the host-based authentication method succeeded for the user.

Could not decode packet in host-based authentication

Error decoding "hostbased" packet.

Level: warning

Facility: AUTH

Decoding the host-based authentication protocol packet failed.

The host name given by the client does not match the one given by the client in host-based authentication

Client gave us a hostname (<hostname>) which doesn't match the one we got from DNS (<hostname>) (sending failure)

Level: warning

Facility: AUTH

The server has been configured to use strict host name checking and the host name obtained using reverse DNS lookup does not match the one in the host-based authentication packet.

The host name given by client does not match the one given by the client in host-based authentication, ignored

Client gave us a hostname (<hostname>) which doesn't match the one we got from DNS (<hostname>) (trusting that client is valid, if signature verification succeeds)

Level: warning

Facility: AUTH

The host name obtained using reverse DNS lookup does not match the one in the host-based authentication packet, but the server does not require a match.

Invalid packet received in host-based authentication

Invalid packet. (extra data at end)

Level: warning

Facility: AUTH

The received packet in host-based authentication contains extra data and will be discarded as invalid.

Client is using a public-key algorithm not supported by server in host-based authentication

Client's public key algorithms are not supported by us. (client sent <algorithm-name>)

Level: warning

Facility: AUTH

The public key sent by the client in host-based authentication uses a public key algorithm not supported by the server.

User's .ssh2 directory is missing in host-based authentication

Couldn't find or create user <login-name>'s .ssh2 directory.

Level: warning

Facility: AUTH

The user's .ssh2 directory could not be found or created in host-based authentication.

Received host key and stored host key differ in host-based authentication

The public key stored in <filename> and the one given by the client were different.

Level: warning

Facility: AUTH

The host key sent by the client and the one stored in the known host keys directory differ in host-based authentication.

Invalid client host key in host-based authentication

Importing client pubkey failed.

Level: warning

Facility: AUTH

There was an error when decoding the host key sent by the client during host-based authentication.

F.3 User Authentication - Keyboard-Interactive Password

Login with empty password denied for user

kbd-int: passwd: login with empty password denied for user '<login-name>'.

Level: warning

Facility: AUTH

The server policy forbids login with empty password.

Denied login with too long a password

kbd-int: passwd: user '<login-name>' tried to login with too long password (256)

Level: warning

Facility: AUTH

The server does not allow logins with passwords longer than 256 characters.

Kerberos password accepted

kbd-int: passwd: kerberos password accepted for user <login-name> (<kerberos-name>).

Level: notice

Facility: AUTH

The server accepted the user's Kerberos password in Keyboard- Interactive password authentication.

Password not accepted

```
kbd-int: passwd: wrong password given for user '<login-name>'.
```

Level: warning

Facility: AUTH

The password supplied by the client was invalid.

Password must be changed

```
kbd-int: passwd: user '<login-name>' forced to change password.
```

Level: informational

Facility: AUTH

The server has determined that the user's password must be changed.

Error during password changing

```
kbd-int: passwd: user '<login-name>': <error-message>
```

Level: warning

Facility: AUTH

There was an error during password changing.

Password change done

```
kbd-int: passwd: user '<login-name>' passwd change [successful|failed]
```

Level: notice

Facility: AUTH

Password change resulted in success or failure.

F.4 User Authentication - Keyboard-Interactive

Client sent fewer responses than server sent requests

```
auth-kbd-int: client sent us fewer responses than we sent requests (sent: <sent-requests>,
recv: <received-responses>).
```

Level: error

Facility: AUTH

Protocol error: the client sent fewer responses than the server sent requests.

Login denied, faking transaction

```
auth-kbd-int: User '<login-name>' login denied, faking real transaction.
```

Level: warning

Facility: AUTH

The user is not allowed to log in, but the rest of the transaction proceeds normally, except that all results are marked as failures.

F.5 User Authentication - Password

User not allowed to log in after password change

```
User '<login-name>' not allowed to log in after password change (strange).
```

Level: warning

Facility: AUTH

For some reason, the system denies login for the user after a mandatory password change.

Password change required after password change

```
User '<login-name>' password must be changed after password change (strange).
```

Level: warning

Facility: AUTH

For some reason, the system requires the user to change their password even after a mandatory password change.

Password change failed

```
Password change for user '<login-name>' failed (reason: <error-message>).
```

Level: warning

Facility: AUTH

Password change failed.

Password change succeeded

Password change for user '<login-name>' succeeded.

Level: notice

Facility: AUTH

Password change succeeded.

Error during password change

```
passwd_change: error_msg: '<error-message>'
```

Level: warning

Facility: AUTH

An error happened during password changing.

The server does not allow root logins

```
root login denied for user '<login-name>'.
```

Level: warning

Facility: AUTH

The server's configuration does not allow root (administrator) logins or does not allow root logins with a password.

The server does not allow logins with empty passwords

```
attempt to login as <login-name> with empty password denied.
```

Level: warning

Facility: AUTH

The server's configuration does not allow logins with empty passwords.

The server does not allow logins with passwords longer than 256 characters

```
attempt to login as <login-name> with password longer than 256 characters denied.
```

Level: warning

Facility: AUTH

The server does not allow logins with passwords longer than 256 characters.

Kerberos password accepted

```
Kerberos password accepted for user <login-name> (<kerberos-name>).
```

Level: notice

Facility: AUTH

The server accepted the Kerberos password for the user.

Password accepted

User <login-name>'s local password accepted.

Level: notice

Facility: AUTH

The server accepted the user's local password.

Password not accepted

Wrong password given for user '<login-name>'.

Level: warning

Facility: AUTH

The password supplied by the client was invalid.

Password authentication accepted

Password authentication for user <login-name> accepted.

Level: notice

Facility: AUTH

The client passed the password authentication, but the server still needs to check whether the password needs to be changed.

Badly formatted password change request

Badly formatted password change request, denying already successful authentication.

Level: notice

Facility: AUTH

The server received a badly formatted password change request, and the authentication will be noted as failed.

Changing user's password

Changing <login-name>'s password.

Level: notice

Facility: AUTH

The server is now trying to change the user's password.

Password change needed for the user

User <login-name> forced to change password.

Level: informational

Facility: AUTH

The server has determined that the user's password must be changed.

User exceeds maximum number of password guesses

PasswordGuesses exceeded.

Level: warning

Facility: AUTH

User exceeded maximum number of password guesses.

F.6 User Authentication - Public Key

Certificate not authorized for login

Authorization check for user <login-name>'s certificate rejected[, reason: <error-message>].

Level: warning

Facility: AUTH

The server's authorization check for the certificate produced a negative result, meaning that public-key authentication with this certificate is denied.

Error in public key decoded from certificate

Couldn't get info from certificate public key used by user <login-name>.

Level: warning

Facility: AUTH

After extracting the public key from the received certificate, the server could not get the public key information from the public key.

Key length too small in certificate

Use of certificate for user <login-name> is not allowed, because public key is too small (pk size <key-size>, min size <minimum-size>).

Level: warning

Facility: AUTH

The server has rejected the authentication using the certificate sent by the client, because the public key in the certificate is too short.

Key length too large in certificate

Use of certificate for user <login-name> is not allowed, because public key is too large (pk size <key-size>, max size <maximum-size>).

Level: warning

Facility: AUTH

The server has rejected the authentication using the certificate sent by the client because the public key in the certificate is too long.

Signature check failed

Signature verify failed for certificate from user <login-name>.

Level: warning

Facility: AUTH

The signature verification failed for the user in certificate authentication.

Certificate authentication accepted

Certificate authentication for user <login-name> accepted.

Level: notice

Facility: AUTH

The server has accepted the certificate authentication for the user.

Certificate authentication rejected

Certificate authentication for user <login-name> rejected.

Level: warning

Facility: AUTH

The server has rejected the certificate authentication for the user.

Public key options prohibit using the key

Use of public key <key-name> is not allowed in public key options for the host the user <login-name> is logging in from.

Level: notice

Facility: AUTH

Using the public key for the user and host has been denied based on the public key options set on the server for the key.

Error in public key

Couldn't get info from public key <key-name> used by user <login-name>.

Level: warning

Facility: AUTH

The server could not get the public key information from the public key.

Key length too small

Use of public key <key-name> by user <login-name> is not allowed, because public key is too small (pk size <key-size>, min size <minimum-size>).

Level: warning

Facility: AUTH

The server has rejected the authentication using the public key sent by the client because the key is too short.

Key length too large

Use of public key <key-name> by user <login-name> is not allowed, because public key is too large (pk size <key-size>, max size <maximum-size>).

Level: warning

Facility: AUTH

The server has rejected the authentication using the public key sent by the client because the key is too long.

Cryptographic operation failed for RSA key

Crypto operation failed for RSA key of user <login-name>.

Level: warning

Facility: AUTH

A cryptographic operation failed for an RSA key.

Root login permitted for forced command

root login permitted for forced command.

Level: notice

Facility: AUTH

The server has been configured to not allow root (administrator) logins, but will allow forced commands as root.

Public-key authentication accepted

Public key authentication for user <login-name> accepted.

Level: notice

Facility: AUTH

The server has accepted the public-key authentication for the user.

Bad packet when verifying key

got bad packet when verifying user <login-name>'s publickey.

Level: warning

Facility: AUTH

The server received an invalid packet when trying to verify the user's public key.

Public key is authorized

Public key <filename> authorized for user <login-name>, verifying signature.

Level: notice

Facility: AUTH

The server has determined that the public key supplied by the client is authorized for logging in, and will now verify the signature supplied by the client.

User's public key logged with fingerprint

User authorized by public key: <key-comment>, fingerprint: <key-fingerprint>

Level: informational

Facility: AUTH

The server logs the user's public key fingerprint.

User's public key logged, fingerprint not created

User authorized by public key (could not create a fingerprint): <key-comment>: <key-data>

Level: informational

Facility: AUTH

The server was unable to create the user's public key fingerprint when logging the user's public key.

F.7 Certificate-Specific Code

Certificate verification failed

Certificate verification failed: search-state = {<search-state>}

Level: informational

Facility: AUTH

Verifying a certificate failed in user or host authentication. <search-state> contains the search status bits that give information about what went wrong.

Opening listener succeeds

Opening listener at <path> succeeded.

Level: informational

Facility: AUTH

Listener was successfully opened.

Opening listener fails

Opening listener at <path> failed.

Level: informational

Facility: AUTH

Opening listener failed.

F.8 Agent Forwarding

Agent forwarding requested

Agent forwarding requested, creating a listener.

Level: informational

Facility: DAEMON

The client has requested agent forwarding, and the server is creating a listener for it.

Agent forwarding request has been denied

Agent forwarding request denied in configuration.

Level: informational

Facility: DAEMON

The client has requested agent forwarding, but the server configuration forbids it.

Forwarding an agent connection

Opening an agent forwarding channel

Level: informational

Facility: DAEMON

The server has received an agent connection in the agent forwarding listener, and is opening an agent forwarding channel to the client.

Closing an agent connection

Closing an agent forwarding channel

Level: informational

Facility: DAEMON

The agent forwarding channel from the server to the client has been closed.

Agent forwarding request fails

Agent forwarding request failed as user <username> is denied terminal access in the server configuration

Level: informational

Facility: DAEMON

The user is denied terminal access in the server configuration, resulting in agent forwarding request failing.

F.9 Session Channels

Session channel open request received

Received a channel open request, type <channel-type>, channel id <channel-number>

Level: informational

Facility: DAEMON

Received a request to open a session channel of the specified type with specified channel ID.

Closing session channel

Destroying session channel <channel-number>

Level: informational

Facility: DAEMON

The server is destroying the session channel with the specified ID number.

Session channel extension request received

Received a session channel extension request of type <extension-type> for channel number <channel-number>

Level: informational

Facility: DAEMON

Received a session channel extension request of the specified type for the channel with specified ID number.

Setting environment variable denied

User tried to set environment variable '<environment-variable>' to '<variable-value>' in "<filename>", but was denied by policy.

Level: notice

Facility: DAEMON

Setting the environment variable denied by server policy.

Opening log for internal SFTP server

Opening log for internal sftp-server.

Level: informational

Facility: DAEMON

The server opened the log for the internal SFTP server.

Chrooting user

User '<login-name>' will be chrooted to directory '<directory>'.

Level: informational

Facility: DAEMON

The server is chrooting the user into a directory.

Changed to run on user privileges

Now running on <login-name>'s privileges.

Level: informational

Facility: DAEMON

The server has dropped root (administrator) privileges and is now running on user's privileges.

Setting environment variable denied by public key options

User tried to set environment variable '<environment-variable>' to '<variable-value>' in public key options, but was denied by policy.

Level: notice

Facility: DAEMON

Setting the environment variable denied by public key options.

Starting internal SFTP server

Starting internal sftp-server for user '<login-name>', sshd2 PID [<pid-number>].

Level: notice

Facility: LOCAL7

The internal SFTP server is starting.

Stopping internal SFTP server

Stopping internal sftp-server for user '<login-name>', sshd2 PID [<pid-number>].

Level: notice

Facility: LOCAL7

The internal SFTP server is stopping.

Bad data received in environment variable setting

Bad data on ssh_channel_request_env().

Level: warning

Facility: DAEMON

Decoding an environment variable setting request failed in the ssh_channel_request_env function.

Invalid values received in environment variable setting

Invalid values on request to set environment variable: name='<variable-name>', value='<variable-value>'.

Level: warning

Facility: DAEMON

The environment variable setting request contained invalid values.

Environment variable setting forbidden by policy

Client tried to set environment variable '<variable-name>' to '<variable-value>', but it is forbidden by policy.

Level: notice

Facility: DAEMON

The environment variable setting failed because of server policy.

Executing session for user fails

Executing session for user '<username>' failed. Freeing confidential data failed, exiting.

Level: error

Facility: DAEMON

Executing session for user, and freeing confidential data both fail, resulting in exiting.

Forced command fails

Forced command failed as user <username> is denied terminal access in the server configuration

Level: informational

Facility: DAEMON

User is denied terminal access in the server configuration, resulting in forced command failing.

Pty request fails

Pty request failed as user <username> is denied terminal access in the server configuration

Level: informational

Facility: DAEMON

User is denied terminal.

Shell request fails

Shell request failed as user <username> is denied terminal access in the server configuration

Level: informational

Facility: DAEMON

User is denied terminal access in the server configuration, resulting in shell request failing.

Exec request fails

Exec request failed as user <username> is denied terminal access in the server configuration

Level: informational

Facility: DAEMON

User is denied terminal access in the server configuration, resulting in exec request failing.

F.10 SSH1 Agent Forwarding

SSH1 agent forwarding denied

SSH1 agent forwarding request denied in configuration.

Level: informational

Facility: DAEMON

SSH1 agent forwarding is denied by the server configuration.

Creating SSH1 agent listener

SSH1 agent forwarding requested, creating a listener.

Level: informational

Facility: DAEMON

SSH1 agent forwarding allowed, creating an agent listener.

Opening an SSH1 agent forwarding channel

Opening an SSH1 agent forwarding channel

Level: informational

Facility: DAEMON

SSH1 agent connection received, opening a forwarding channel.

Closing an SSH1 agent forwarding channel

Closing an ssh1 agent forwarding channel

Level: informational

Facility: DAEMON

Closing a SSH1 agent forwarding channel.

SSH1 agent forwarding fails

SSH1 agent forwarding request failed as user <username> is denied terminal access in the server configuration

Level: informational

Facility: DAEMON

The user is denied terminal access in the server configuration, resulting in SSH1 agent forwarding request failing.

F.11 Port Forwarding

Direct TCP port forwarding request denied

Direct TCP/IP forwarding request (<host>:<port>) denied for user in configuration.

Level: informational

Facility: DAEMON

A direct TCP port forwarding request has been denied because of system policy.

Direct TCP port forwarding forbidden

Direct TCP/IP forwarding request denied in configuration.

Level: informational

Facility: DAEMON

A direct TCP port forwarding request was denied because the system policy forbids TCP port forwarding.

Connection received to forwarded port

Connection to forwarded port <forwarded-port> from <host>:<port>

Level: informational

Facility: DAEMON

The forwarded port received a connection.

Remote port forwarding connection received

Remote fwd connect from <connection-originator> to local port <port>

Level: informational

Facility: DAEMON

A remote port forwarding request was received.

Remote listener creation failed

Creating remote listener for <address>:<port> failed.

Level: notice

Facility: DAEMON

A remote listener creation failed.

Port set up for remote forwarding

Port <port> set up for remote forwarding.

Level: informational

Facility: DAEMON

A port was successfully set up for remote forwarding.

Received a remote forwarding request

Remote TCP/IP forwarding request received from host "<host>", by authenticated user "<login-name>" .

Level: informational

Facility: DAEMON

Received a remote forwarding request.

Forwarding a privileged port

Privileged user "<login-name>" forwarding a privileged port.

Level: notice

Facility: DAEMON

Forwarding a privileged port (under 1024) for a privileged user.

Remote TCP port forwarding forbidden

Remote TCP/IP forwarding request denied in configuration.

Level: informational

Facility: DAEMON

A remote TCP port forwarding request was denied because the system policy forbids TCP port forwarding.

Remote TCP port forwarding request denied

Remote TCP/IP forwarding (<host>:<port>) request denied for user in configuration.

Level: informational

Facility: DAEMON

A remote TCP port forwarding request has been denied because of system policy.

Connection to direct forwarding received

```
direct fwd connect from <connection-originator> to local port <port>
```

Level: informational

Facility: DAEMON

Received a connection to forwarded port.

F.12 Common Code

Disconnected

```
[Local|Remote host] disconnected: <reason-message>
```

Level: informational

Facility: DAEMON

The connection was disconnected by the local or the remote end for the reason given.

F.13 Host Key I/O

PIN request received

```
PIN requested, PIN label <pin-label> at keypath <keypath>, ignoring.
```

Level: warning

Facility: DAEMON

A PIN request was received when reading host keys, and since the user is not available at this point, the request is ignored.

F.14 Cryptography Support

Random Number Generation

```
Support for random number generation: [/dev/random|software]
```

Level: informational

Facility: DAEMON

Cryptography support for random number generation: '/dev/random' for hardware support, or 'software' for software support.

Cipher

```
Support for cipher <cipher-name>: [ICSF|software]
```

Level: informational

Facility: DAEMON

Cryptography support for a given cipher: 'ICSF' for hardware support, or 'software' for software support.

MAC

```
Support for MAC <MAC-name>: [ICSF|software]
```

Level: informational

Facility: DAEMON

Cryptography support for a given MAC algorithm: 'ICSF' for hardware support, or 'software' for software support.

F.15 General Server Log Messages

Disconnected: Host not allowed to connect

```
Disallowed connect from denied host. '<message>'
```

Level: warning

Facility: DAEMON

The server has disconnected the client because the client is not allowed to connect.

Disconnected: Protocol error

```
Protocol error in [local|remote]: '<message>'
```

Level: warning

Facility: DAEMON

Disconnecting because of a protocol error in local or remote end.

Disconnected: Key exchange failed

```
Key exchange failed in [local|remote]: '<message>'
```

Level: warning

Facility: DAEMON

Disconnecting because key exchange failed in local or remote end.

Disconnected: Illegal code

```
RESERVED (this is an illegal code) in [local|remote]: '<message>'
```

Level: warning

Facility: DAEMON

Disconnecting because of illegal code.

Disconnected: MAC failed

```
MAC failed in [local|remote], disconnecting: '<message>'
```

Level: warning

Facility: DAEMON

Disconnecting because MAC failed in local or remote end.

Disconnected: Compression error

```
compression error in [local|remote], disconnecting: '<message>'
```

Level: warning

Facility: DAEMON

Disconnecting because of a compression error.

Disconnected: Service not available

```
service not available: '<message>'
```

Level: warning

Facility: DAEMON

Disconnecting because a requested service was not available.

Disconnected: Protocol version not supported

```
protocol version not supported in [local|remote]: '<message>'
```

Level: informational

Facility: DAEMON

Disconnecting because the protocol version was not supported.

Disconnected: Host key not verified

```
host key not verifiable in [local|remote]: '<message>'
```

Level: warning

Facility: DAEMON

Disconnecting because the host key could not be verified.

Disconnected: Connection was lost

```
connection lost: '<message>'
```

Level: informational

Facility: DAEMON

Disconnecting because the connection was lost.

Disconnected: Disconnected by application

```
disconnected by application in [local|remote]: '<message>'
```

Level: informational

Facility: DAEMON

Disconnected by application.

Disconnected: Too many connections

```
too many connections : '<message>'
```

Level: informational

Facility: DAEMON

Disconnecting because the internal connection limit was exceeded.

Disconnected: User authentication failed

```
User authentication failed: '<message>'
```

Level: warning

Facility: DAEMON

Disconnecting because the user authentication failed. This message should only occur when the other end is of version 2.0.13 or earlier.

Disconnected: Authentication canceled by user

```
authentication cancelled by user: '<message>'
```

Level: informational

Facility: DAEMON

Disconnecting because the authentication was canceled by the user.

Disconnected: No more authentication methods

```
no more authentication methods on [local|remote]: '<message>'
```

Level: informational

Facility: DAEMON

Disconnected because of running out of authentication methods. This generally means that the client failed in all the authentication methods available on the server.

Disconnected: Illegal user name

```
illegal user name : '<message>'
```

Level: informational

Facility: DAEMON

Disconnected because the user name was illegal.

Disconnected: Unknown reason

```
Unknown reason code '<reason-code>' for disconnect. msg: '<message>'
```

Level: error

Facility: DAEMON

Disconnected for an unknown reason.

Idle timeout exceeded

```
Idle timeout exceeded.
```

Level: warning

Facility: DAEMON

The idle timeout limit was exceeded.

Remote protocol version string received

```
Remote protocol version: <version-string>
```

Level: informational

Facility: DAEMON

The server has received the remote protocol version string from the client.

User authenticated

```
User <login-name> (uid <uid-number>), coming from <host>, authenticated.
```

Level: notice

Facility: DAEMON

A general message stating that a user has been successfully authenticated.

User authenticated, root login

`ROOT LOGIN: User <login-name> (uid <uid-number>), coming from <host>, authenticated.`

Level: notice

Facility: DAEMON

General message stating that a superuser has been successfully authenticated.

User authentication failed

`Authentication failed for user <login-name>, coming from <host>.`

Level: warning

Facility: DAEMON

A user tried to log in, but user authentication failed.

User logged out

`Logout for user <login-name>.`

Level: informational

Facility: DAEMON

The specified user has now logged out or has been logged out.

Login grace time exceeded

`LoginGraceTime exceeded.`

Level: warning

Facility: DAEMON

The `LoginGraceTime` value was exceeded. This means that the client did not succeed in logging in during the time period defined by the configuration option `LoginGraceTime`.

Connection received

`connection from "<host>" (listen port: <listen-port>)`

Level: informational

Facility: DAEMON

The server has received a connection from a host.

Connection received in interface

```
connection from "<host>" (listen iface: <address>:<port>)
```

Level: informational

Facility: DAEMON

The server has received a connection from a host to a port on specific interface.

Refused connection: too many open connections

```
Refusing connection from "<host>". Too many open connections (max <maximum-connections>, now open <open-connections>).
```

Level: warning

Facility: DAEMON

The server has refused a connection because it would have otherwise exceeded the limit of simultaneously open connections.

Denied connection because of `tcp_wrappers`

```
Denied connection from <connection-originator> by tcp wrappers.
```

Level: warning

Facility: DAEMON

The server has refused a connection because it was denied by `tcp_wrappers`.

Forking for new connection failed

```
Forking a server for a new connection failed.
```

Level: warning

Facility: DAEMON

The server tried to fork to handle a new connection, but the forking failed.

Server warning

```
WARNING: <message>
```

Level: warning

Facility: DAEMON

A warning was received from the server.

Fatal server error

```
FATAL ERROR: <message>
```

Level: error

Facility: DAEMON

The server has encountered a fatal error condition.

SIGHUP handler received an invalid signal

Server's SIGHUP handler received an illegal signal.

Level: warning

Facility: DAEMON

Invalid signal received by SIGHUP-handler.

License file error

License file error: <message>

Level: error

Facility: DAEMON

The server encountered an error when checking the license file.

Server restarting

restarting...

Level: warning

Facility: DAEMON

The server is restarting.

Server starting in inetd mode

Starting daemon in inetd mode.

Level: warning

Facility: DAEMON

The server is starting in inetd mode.

Server created a listener

Listener created on <address>:<port>.

Level: warning

Facility: DAEMON

The server has successfully created a listener.

Server created an UDP listener

UDP Listener created on <address>:<port>.

Level: warning

Facility: DAEMON

The server has successfully created an UDP listener.

setsid failed

setsid: <error-message>

Level: notice

Facility: DAEMON

A call to setsid failed in the server.

Server running

Daemon is running.

Level: warning

Facility: DAEMON

The server process has successfully performed all initialization operations and is now listening for connections.

SIG(INT|TERM) handler received an illegal signal

Invalid signal received by SIG(INT|TERM)-handler.

Level: warning

Facility: DAEMON

Server's SIG(INT|TERM) handler received an illegal signal.

SIGUSR1 handler received an illegal signal

Invalid signal received by SIGUSR1-handler.

Level: warning

Facility: DAEMON

Server's SIGUSR1 handler received an illegal signal.

F.16 SFTP

File closed

File '<filename>' closed (written: <bytes-written>, read: <bytes-read>).

Level: notice

Facility: LOCAL7

A file has been closed. This is the only log message for a completed file transfer. Typically the whole file is read or written, but this is not the only possibility. This log message will report the sum of all reads and the sum of all writes since opening the file. (Note: Even the same client can open a file multiple times, which will result in multiple closes, each with a possibly different number of read and written bytes.)

Bad message received

Received bad message <message-number>.

Level: error

Facility: LOCAL7

The protocol code received a bad message from the client.

Got wrong message before receiving INIT

Got message type <message-type> before receiving INIT. This is a protocol error, destroying the file-server.

Level: error

Facility: LOCAL7

A protocol error occurred, and the file server is being terminated.

Received SSH_FXP_INIT

Received SSH_FXP_INIT

Level: notice

Facility: LOCAL7

The file server received the SSH_FXP_INIT message from the client.

Could not decode request ID

Couldn't decode request id. Destroying file-server.

Level: error

Facility: LOCAL7

A protocol error took place, and the file server is being terminated.

Received SSH_FXP_OPEN

Received SSH_FXP_OPEN

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_OPEN` message from the client.

Received `SSH_FXP_CLOSE`

Received `SSH_FXP_CLOSE`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_CLOSE` message from the client.

Received `SSH_FXP_STAT`

Received `SSH_FXP_STAT`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_STAT` message from the client.

Received `SSH_FXP_LSTAT`

Received `SSH_FXP_LSTAT`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_LSTAT` message from the client.

Received `SSH_FXP_FSTAT`

Received `SSH_FXP_FSTAT`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_FSTAT` message from the client.

Received `SSH_FXP_SETSTAT`

Received `SSH_FXP_SETSTAT`

Level: notice

Facility: LOCAL7

The file server received an `SSH_FXP_SETSTAT` message from the client.

Received `SSH_FXP_FSETSTAT`

Received `SSH_FXP_FSETSTAT`

Level: notice

Facility: LOCAL7

The file server received an `SSH_FXP_FSETSTAT` message from the client.

Received `SSH_FXP_OPENDIR`

Received `SSH_FXP_OPENDIR`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_OPENDIR` message from the client.

Received `SSH_FXP_READDIR`

Received `SSH_FXP_READDIR`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_READDIR` message from the client.

Received `SSH_FXP_REMOVE`

Received `SSH_FXP_REMOVE`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_REMOVE` message from the client.

Received `SSH_FXP_MKDIR`

Received `SSH_FXP_MKDIR`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_MKDIR` message from the client.

Received `SSH_FXP_RMDIR`

Received `SSH_FXP_RMDIR`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_RMDIR` message from the client.

Received `SSH_FXP_REALPATH`

Received `SSH_FXP_REALPATH`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_REALPATH` message from the client.

Received `SSH_FXP_RENAME`

Received `SSH_FXP_RENAME`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_RENAME` message from the client.

Received `SSH_FXP_READLINK`

Received `SSH_FXP_READLINK`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_READLINK` message from the client.

Received `SSH_FXP_SYMLINK`

Received `SSH_FXP_SYMLINK`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_SYMLINK` message from the client.

Received `SSH_FXP_EXTENDED`

Received `SSH_FXP_EXTENDED`

Level: informational

Facility: LOCAL7

The file server received an `SSH_FXP_EXTENDED` message from the client.

Received bad `SSH_FXP_INIT`

```
Received bad SSH_FXP_INIT
```

Level: error

Facility: LOCAL7

The server received a bad `SSH_FXP_INIT` message.

Negotiated protocol version

```
Negotiated version <version-number>.
```

Level: notice

Facility: LOCAL7

The server has negotiated to use the specified protocol version with the client.

Uploading file

```
Uploading '<filename>' (flags [append] [trunc] [creat] [excl])
```

Level: notice

Facility: LOCAL7

The server has received a write request for the specified file with the specified flags.

Downloading file

```
Downloading '<filename>'
```

Level: notice

Facility: LOCAL7

The server has received a read request for the specified file.

Failed to open file

```
Failed to open file '<filename>'. Error <error-number>.
```

Level: warning

Facility: LOCAL7

The server failed to open the specified file.

Closed file

```
[ Closed | Received error when closing ] file '<filename>' (handle=<handle>)
```

Level: notice

Facility: LOCAL7

The server closed the file, possibly with an error during the close.

Statting file

Statting file '<filename>'

Level: informational

Facility: LOCAL7

The server is statting the specified file.

Lstatting file

Lstatting file '<filename>'

Level: informational

Facility: LOCAL7

The server is lstatting the specified file.

Fstatting file

Fstatting file '<filename>'

Level: informational

Facility: LOCAL7

The server is fstatting the specified file.

Setstatting file

Setstat file '<filename>' ([size] [uidgid] [perms] [acmodtime])

Level: notice

Facility: LOCAL7

The server is setstatting the attributes of the specified file.

Fsetstatting file

Fsetstat file '<filename>' (handle=<handle>) ([size] [uidgid] [perms] [acmodtime])

Level: notice

Facility: LOCAL7

The server is fsetstatting the attributes of the specified file.

Opening directory

Opening directory '<filename>'

Level: notice

Facility: LOCAL7

The server is opening the specified directory.

Failed to open directory

```
Failed to open dir '<filename>'. Error <error-number>.
```

Level: warning

Facility: LOCAL7

The server failed to open the specified directory.

Readdir on directory

```
Readdir on directory '<filename>' (handle=<handle>)
```

Level: informational

Facility: LOCAL7

The server performed a readdir operation on the specified directory.

Removing file

```
Removing file '<filename>'
```

Level: notice

Facility: LOCAL7

The server is removing the specified file.

Failed to remove file

```
Failed to remove file '<filename>'. Error <error-number>.
```

Level: warning

Facility: LOCAL7

The server failed to remove the specified file.

Creating directory

```
Creating directory '<filename>'
```

Level: notice

Facility: LOCAL7

The server is creating the requested directory.

Failed to create directory

```
Failed to make dir '<filename>'. Error <error-number>.
```

Level: warning

Facility: LOCAL7

The server failed to create the requested directory.

Removing directory

```
Removing directory '<filename>'
```

Level: notice

Facility: LOCAL7

The server is removing the specified directory.

Failed to remove directory

```
Failed to remove dir '<filename>'. Error <error-number>.
```

Level: warning

Facility: LOCAL7

The server failed to remove the requested directory.

Resolving path

```
Resolving path to '<filename>'
```

Level: informational

Facility: LOCAL7

The server is resolving the path to the specified file.

Renaming file

```
Renaming file '<filename>' to '<new-filename>'
```

Level: notice

Facility: LOCAL7

The server is renaming the specified file.

Failed to rename file

```
Failed to rename '<filename>'. Error <error-number>.
```

Level: warning

Facility: LOCAL7

The server failed to rename the specified file.

Reading link

```
Reading link '<link-name>'
```

Level: informational

Facility: LOCAL7

The server is reading the specified link.

Readlink failed

```
Readlink failed for '<link-name>'. Error <error-number>.
```

Level: warning

Facility: LOCAL7

The readlink operation failed in the server.

Creating link

```
Creating link '<link-name>' with value '<target>'
```

Level: notice

Facility: LOCAL7

The server is creating the specified link.

Creating link failed

```
Failed to create symlink '<link-name>'. Error <error-number>.
```

Level: warning

Facility: LOCAL7

Creating the specified link failed in the server.

Got EXTENDED request

```
Got EXTENDED request <request-number>
```

Level: informational

Facility: LOCAL7

The server received an extended request from the client.

Appendix G Audit Messages

This appendix lists the audit messages generated by the server.

2000 Sft_server_starting

Level: notice

Origin: Tectia Secure File Transfer

The SFT server is starting.

Default log facility: daemon

Argument	Description
Username	Username
Session-Id	Session ID

2001 Sft_server_stopping

Level: notice

Origin: Tectia Secure File Transfer

The SFT server is stopping.

Default log facility: daemon

Argument	Description
Username	Username
Session-Id	Session ID

2002 Sft_server_connected

Level: informational

Origin: Tectia Secure File Transfer

The connection to SFT server was accepted.

Default log facility: daemon

Argument	Description
Session-Id	Session ID

2003 Sft_server_disconnected**Level:** informational**Origin:** Tectia Secure File Transfer

The connection to SFT server was disconnected.

Default log facility: daemon

Argument

Session-Id

Description

Session ID

2004 Sft_server_fxp_request**Level:** informational**Origin:** Tectia Secure File Transfer

Invalid SFT protocol message was received.

Default log facility: daemon

Argument

Request type

Description

Request type

Request ID

Request ID

Text

Error message

Session-Id

Session ID

2005 Sft_server_fxp_unknown**Level:** notice**Origin:** Tectia Secure File Transfer

Unknown SFT protocol message was received.

Default log facility: daemon

Argument

Request type

Description

Request type

Request ID

Request id

Session-Id

Session ID

2006 Sft_server_fxp_version**Level:** notice**Origin:** Tectia Secure File Transfer

SFT protocol version was negotiated.

Default log facility: daemon

Argument

Negotiated version

Description

Negotiated protocol version

Argument	Description
Session-Id	Session ID

2007 Sft_server_open_file**Level:** notice**Origin:** Tectia Secure File Transfer

File OPEN was successful.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2008 Sft_server_open_file_failed**Level:** warning**Origin:** Tectia Secure File Transfer

File OPEN failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2010 Sft_server_read_file_failed**Level:** informational**Origin:** Tectia Secure File Transfer

File READ failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2012 Sft_server_write_file_failed**Level:** informational**Origin:** Tectia Secure File Transfer

File WRITE failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2013 Sft_server_close_file

Level: informational

Origin: Tectia Secure File Transfer

File CLOSE was successful.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2014 Sft_server_close_file_failed

Level: warning

Origin: Tectia Secure File Transfer

File CLOSE failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2015 Sft_server_stat_file

Level: informational

Origin: Tectia Secure File Transfer

File STAT was successful.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2016 Sft_server_stat_file_failed

Level: informational

Origin: Tectia Secure File Transfer

File STAT failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2017 Sft_server_lstat_file

Level: informational

Origin: Tectia Secure File Transfer

File LSTAT was successful.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2018 Sft_server_lstat_file_failed

Level: informational

Origin: Tectia Secure File Transfer

File LSTAT failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2019 Sft_server_fstat_file

Level: informational

Origin: Tectia Secure File Transfer

File FSTAT was successful.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2020 Sft_server_fstat_file_failed

Level: informational

Origin: Tectia Secure File Transfer

File FSTAT failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2021 Sft_server_setstat_file

Level: notice

Origin: Tectia Secure File Transfer

File SETSTAT was successful.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2022 Sft_server_setstat_file_failed

Level: warning

Origin: Tectia Secure File Transfer

File SETSTAT failed.

Default log facility: daemon

Argument	Description
File name	File name

Argument	Description
Text	Audit message
Session-Id	Session ID

2023 Sft_server_fsetstat_file

Level: notice

Origin: Tectia Secure File Transfer

File FSETSTAT was successful.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2024 Sft_server_fsetstat_file_failed

Level: warning

Origin: Tectia Secure File Transfer

File FSETSTAT failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2025 Sft_server_remove_file

Level: notice

Origin: Tectia Secure File Transfer

File REMOVE was successful.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2026 Sft_server_remove_file_failed

Level: warning

Origin: Tectia Secure File Transfer

File REMOVE failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2027 Sft_server_rename_file

Level: notice

Origin: Tectia Secure File Transfer

File was renamed.

Default log facility: daemon

Argument	Description
Old file name	Old file name
New file name	New file name
Text	Audit message
Session-Id	Session ID

2028 Sft_server_rename_file_failed

Level: warning

Origin: Tectia Secure File Transfer

File RENAME failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2029 Sft_server_symlink

Level: informational

Origin: Tectia Secure File Transfer

Symlink was created.

Default log facility: daemon

Argument	Description
Link name	Link name

Argument

Target name
Text
Session-Id

Description

Target name
Audit message
Session ID

2030 Sft_server_symlink_failed**Level:** warning**Origin:** Tectia Secure File Transfer

File/directory SYMLINK failed.

Default log facility: daemon

Argument

File name
Text
Session-Id

Description

File name
Audit message
Session ID

2031 Sft_server_readlink**Level:** informational**Origin:** Tectia Secure File Transfer

Symlink was resolved.

Default log facility: daemon

Argument

Link name
Target name
Text
Session-Id

Description

Link name
Resolved target name
Audit message
Session ID

2032 Sft_server_readlink_failed**Level:** warning**Origin:** Tectia Secure File Transfer

File/directory READLINK failed.

Default log facility: daemon

Argument

File name
Text
Session-Id

Description

File name
Audit message
Session ID

2033 Sft_server_realpath**Level:** informational

Origin: Tectia Secure File Transfer

File name was resolved.

Default log facility: daemon

Argument	Description
File name	File name
Path	Resolved file name
Text	Audit message
Session-Id	Session ID

2034 Sft_server_realpath_failed

Level: warning

Origin: Tectia Secure File Transfer

File/directory REALPATH failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2035 Sft_server_digest

Level: informational

Origin: Tectia Secure File Transfer

SFT server calculated digest.

Default log facility: daemon

Argument	Description
File name	File name
Offset	File offset
Length	Length of the file data for digest calculation
Digest	Calculated digest
Session-Id	Session ID

2036 Sft_server_digest_failed

Level: warning

Origin: Tectia Secure File Transfer

File DIGEST failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2037 Sft_server_open_dir

Level: notice

Origin: Tectia Secure File Transfer

Directory OPEN was successful.

Default log facility: daemon

Argument	Description
Directory name	Directory name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2038 Sft_server_open_dir_failed

Level: warning

Origin: Tectia Secure File Transfer

Directory OPEN failed.

Default log facility: daemon

Argument	Description
Directory name	Directory name
Text	Audit message
Session-Id	Session ID

2039 Sft_server_close_dir

Level: informational

Origin: Tectia Secure File Transfer

Directory CLOSE was successful.

Default log facility: daemon

Argument	Description
Directory name	Directory name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2040 Sft_server_close_dir_failed**Level:** warning**Origin:** Tectia Secure File Transfer

Directory CLOSE failed.

Default log facility: daemon

Argument	Description
Directory name	Directory name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2041 Sft_server_create_dir**Level:** notice**Origin:** Tectia Secure File Transfer

Directory CREATE was successful.

Default log facility: daemon

Argument	Description
Directory name	Directory name
Text	Audit message
Session-Id	Session ID

2042 Sft_server_create_dir_failed**Level:** warning**Origin:** Tectia Secure File Transfer

Directory CREATE failed.

Default log facility: daemon

Argument	Description
Directory name	Directory name
Text	Audit message
Session-Id	Session ID

2043 Sft_server_remove_dir**Level:** notice**Origin:** Tectia Secure File Transfer

Directory REMOVE was successful.

Default log facility: daemon

Argument	Description
Directory name	Directory name
Text	Audit message
Session-Id	Session ID

2044 Sft_server_remove_dir_failed

Level: warning

Origin: Tectia Secure File Transfer

Directory REMOVE failed.

Default log facility: daemon

Argument	Description
Directory name	Directory name
Text	Audit message
Session-Id	Session ID

2045 Sft_server_read_dir

Level: informational

Origin: Tectia Secure File Transfer

Directory READ was successful.

Default log facility: daemon

Argument	Description
Directory name	Directory name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2046 Sft_server_read_dir_failed

Level: warning

Origin: Tectia Secure File Transfer

Directory READ failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2047 Sft_server_stream_read

Level: informational

Origin: Tectia Secure File Transfer

File read stream was initiated.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Path	Path to socket file
Offset	File offset
Length	File transfer limit in bytes
Session-Id	Session ID

2048 Sft_server_stream_read_failed

Level: warning

Origin: Tectia Secure File Transfer

File STREAM READ failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2049 Sft_server_stream_write

Level: informational

Origin: Tectia Secure File Transfer

File write stream was initiated.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Path	Path to socket file
Offset	File offset
Length	File transfer limit in bytes
Session-Id	Session ID

2050 Sft_server_stream_write_failed

Level: warning

Origin: Tectia Secure File Transfer

File STREAM WRITE failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2051 Sft_server_stream_cancel

Level: informational

Origin: Tectia Secure File Transfer

File STREAM CANCEL was successful.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2052 Sft_server_stream_cancel_failed

Level: warning

Origin: Tectia Secure File Transfer

File STREAM CANCEL failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2053 Sft_server_stream_wait

Level: informational

Origin: Tectia Secure File Transfer

File STREAM WAIT was successful.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2054 Sft_server_stream_wait_failed
Level: warning

Origin: Tectia Secure File Transfer

File STREAM WAIT failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2055 Sft_server_download_begin
Level: notice

Origin: Tectia Secure File Transfer

File download begins.

Default log facility: daemon

Argument	Description
File name	File name
Limit	File transfer limit in bytes
Session-Id	Session ID

2056 Sft_server_download_end
Level: notice

Origin: Tectia Secure File Transfer

File download ended.

Default log facility: daemon

Argument	Description
File name	File name
Read	Number of bytes read
Success Error	Error code
Session-Id	Session ID

2057 Sft_server_upload_begin**Level:** notice**Origin:** Tectia Secure File Transfer

File upload begins.

Default log facility: daemon

Argument

File name

Limit

Session-Id

Description

File name

File transfer limit in bytes

Session ID

2058 Sft_server_upload_end**Level:** notice**Origin:** Tectia Secure File Transfer

File upload ended.

Default log facility: daemon

Argument

File name

Wrote

Success | Error

Session-Id

Description

File name

Number of bytes written

Error code

Session ID

2059 Sft_server_statistics**Level:** notice**Origin:** Tectia Secure File Transfer

File statistics.

Default log facility: daemon

Argument

File name

Read

Wrote

Text

Session-Id

Description

File name

Number of bytes read

Number of bytes written

Audit message

Session ID

2060 Sft_server_operation_not_allowed**Level:** notice**Origin:** Tectia Secure File Transfer

Extended SFT protocol message was received, but the operation was prohibited.

Default log facility: daemon

Argument	Description
Request type	Request type
Request ID	Request ID
Ext request type	Extended request type
Text	Error message
Session-Id	Session ID

2061 Sft_server_operation_no_license

Level: notice

Origin: Tectia Secure File Transfer

Extended SFT protocol message was received, but no suitable license was found for the operation.

Default log facility: daemon

Argument	Description
Request type	Request type
Request ID	Request ID
Ext request type	Extended request type
Text	Error message
Session-Id	Session ID

2062 Sft_server_no_virtual_folder_dir

Level: error

Origin: Tectia Secure File Transfer

Virtual folder directory does not exist.

Default log facility: daemon

Argument	Description
Text	Virtual folder
Directory name	Directory name
Text	Reason

2065 Sft_server_stat_extended

Level: informational

Origin: Tectia Secure File Transfer

File STREAM STAT was successful.

Default log facility: daemon

Argument	Description
File name	File name

Argument	Description
Text	Audit message
Session-Id	Session ID

2066 Sft_server_stat_extended_failed

Level: informational

Origin: Tectia Secure File Transfer

File STREAM STAT failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2067 Sft_server_lstat_extended

Level: informational

Origin: Tectia Secure File Transfer

File STREAM LSTAT was successful.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2068 Sft_server_lstat_extended_failed

Level: informational

Origin: Tectia Secure File Transfer

File STREAM LSTAT failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2069 Sft_server_setstat_extended

Level: notice

Origin: Tectia Secure File Transfer

File STREAM SETSTAT was successful.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2070 Sft_server_setstat_extended_failed

Level: warning

Origin: Tectia Secure File Transfer

File STREAM SETSTAT failed.

Default log facility: daemon

Argument	Description
File name	File name
Text	Audit message
Session-Id	Session ID

2071 Sft_server_stream_offset

Level: notice

Origin: Tectia Secure File Transfer

File STREAM OFFSET was successful.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle
Text	Audit message
Session-Id	Session ID

2072 Sft_server_stream_offset_failed

Level: warning

Origin: Tectia Secure File Transfer

File STREAM OFFSET failed.

Default log facility: daemon

Argument	Description
File name	File name
File handle	File handle

Argument	Description
Text	Audit message
Session-Id	Session ID

Appendix H Open Source Software License Acknowledgements

SSH Communications Security Corporation acknowledges the following Open Source Software used in the Tectia client/server solution.

BSD Software

This product includes software developed by the University of California, Berkeley and its contributors.

DES

This product includes software developed by Eric Young eay@cryptsoft.com.

ICU

Copyright © 1995-2016 International Business Machines Corporation and others

All rights reserved.

Permission is hereby granted, free of charge, to any person obtaining a copy of this software and associated documentation files (the "Software"), to deal in the Software without restriction, including without limitation the rights to use, copy, modify, merge, publish, distribute, and/or sell copies of the Software, and to permit persons to whom the Software is furnished to do so, provided that the above copyright notice(s) and this permission notice appear in all copies of the Software and that both the above copyright notice(s) and this permission notice appear in supporting documentation.

THE SOFTWARE IS PROVIDED "AS IS", WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT OF THIRD PARTY RIGHTS. IN NO EVENT SHALL THE COPYRIGHT HOLDER OR HOLDERS INCLUDED IN THIS NOTICE BE LIABLE FOR ANY CLAIM, OR ANY SPECIAL INDIRECT OR CONSEQUENTIAL DAMAGES, OR ANY DAMAGES WHATSOEVER RESULTING FROM LOSS OF USE, DATA OR PROFITS, WHETHER IN AN ACTION OF CONTRACT, NEGLIGENCE OR OTHER TORTIOUS ACTION, ARISING OUT OF OR IN CONNECTION WITH THE USE OR PERFORMANCE OF THIS SOFTWARE.

Except as contained in this notice, the name of a copyright holder shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization of the copyright holder.

OpenSSL

Copyright © 1998-2016 The OpenSSL Project. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

1. Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
2. Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
3. All advertising materials mentioning features or use of this software must display the following acknowledgment: "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit. (<http://www.openssl.org/>)"
4. The names "OpenSSL Toolkit" and "OpenSSL Project" must not be used to endorse or promote products derived from this software without prior written permission. For written permission, please contact openssl-core@openssl.org.
5. Products derived from this software may not be called "OpenSSL" nor may "OpenSSL" appear in their names without prior written permission of the OpenSSL Project.
6. Redistributions of any form whatsoever must retain the following acknowledgment: "This product includes software developed by the OpenSSL Project for use in the OpenSSL Toolkit (<http://www.openssl.org/>)"

THIS SOFTWARE IS PROVIDED BY THE OpenSSL PROJECT ``AS IS'' AND ANY EXPRESSED OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE OpenSSL PROJECT OR ITS CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

This product includes cryptographic software written by Eric Young (eay@cryptsoft.com). This product includes software written by Tim Hudson (tjh@cryptsoft.com).

PCRE

This software includes PCRE library. Copyright © 1997-2009 University of Cambridge. All rights reserved.

C++ wrapper functions. Copyright © 2007-2009, Google Inc. All rights reserved.

Redistribution and use in source and binary forms, with or without modification, are permitted provided that the following conditions are met:

- Redistributions of source code must retain the above copyright notice, this list of conditions and the following disclaimer.
- Redistributions in binary form must reproduce the above copyright notice, this list of conditions and the following disclaimer in the documentation and/or other materials provided with the distribution.
- Neither the name of the University of Cambridge nor the name of Google Inc. nor the names of their contributors may be used to endorse or promote products derived from this software without specific prior written permission.

THIS SOFTWARE IS PROVIDED BY THE COPYRIGHT HOLDERS AND CONTRIBUTORS "AS IS" AND ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE DISCLAIMED. IN NO EVENT SHALL THE COPYRIGHT OWNER OR CONTRIBUTORS BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

XFree86

This Software contains portions of XFree86 software and the delivery of XFree86 software or portions of the said software is subject to the acknowledgement of the following copyright notice and permission notice of The Open Group:

Copyright © 1988, 1998 The Open Group

Permission to use, copy, modify, distribute, and sell XFree86 software and its documentation for any purpose is hereby granted without fee, provided that the above copyright notice appear in all copies and that both the copyright notice and this permission notice appear in supporting documentation.

THE XFREE86 SOFTWARE IS PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NONINFRINGEMENT. IN NO EVENT SHALL THE OPEN GROUP BE LIABLE FOR ANY CLAIM, DAMAGES OR OTHER LIABILITY, WHETHER IN AN ACTION OF CONTRACT, TORT OR OTHERWISE, ARISING FROM, OUT OF

OR IN CONNECTION WITH THE XFREE86 SOFTWARE OR THE USE OR OTHER DEALINGS IN THE XFREE86 SOFTWARE.

Except as contained in this notice, the name of The Open Group shall not be used in advertising or otherwise to promote the sale, use or other dealings in this Software without prior written authorization from The Open Group.

ZLIB

This software incorporates zlib data compression library by Jean-loup Gailly and Mark Adler. zEDC zlib is provided by IBM.

liboqs

Licensed under MIT. Copyright (c) 2016-2021 Open Quantum Safe project.

liboqs includes some third party libraries or modules that are licensed differently, including:

- BSD 3-Clause License
- Apache License v2.0
- public domain
- BSD-like CRYPTOGAMS license
- CC0
- Custom license for rand_nist.c:

Created by Bassham, Lawrence E (Fed) on 8/29/17.

Copyright © 2017 Bassham, Lawrence E (Fed). All rights reserved.

NIST-developed software is provided by NIST as a public service. You may use, copy, and distribute copies of the software in any medium, provided that you keep intact this entire notice. You may improve, modify, and create derivative works of the software or any portion of the software, and you may copy and distribute such modifications or works. Modified works should carry a notice stating that you changed the software and should note the date and nature of any such change. Please explicitly acknowledge the National Institute of Standards and Technology as the source of the software.

NIST-developed software is expressly provided "AS IS." NIST MAKES NO WARRANTY OF ANY KIND, EXPRESS, IMPLIED, IN FACT, OR ARISING BY OPERATION OF LAW, INCLUDING, WITHOUT LIMITATION, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, NON-INFRINGEMENT, AND DATA ACCURACY. NIST NEITHER REPRESENTS NOR WARRANTS THAT THE OPERATION OF THE SOFTWARE WILL BE UNINTERRUPTED OR ERROR-FREE, OR THAT ANY DEFECTS WILL BE CORRECTED. NIST DOES NOT WARRANT OR MAKE ANY REPRESENTATIONS REGARDING THE USE OF THE SOFTWARE OR THE RESULTS THEREOF, INCLUDING BUT NOT LIMITED

TO THE CORRECTNESS, ACCURACY, RELIABILITY, OR USEFULNESS OF THE SOFTWARE.

You are solely responsible for determining the appropriateness of using and distributing the software and you assume all risks associated with its use, including but not limited to the risks and costs of program errors, compliance with applicable laws, damage to or loss of data, programs or equipment, and the unavailability or interruption of operation. This software is not intended to be used in any situation where a failure could cause risk of injury or damage to property. The software developed by NIST employees is not subject to copyright protection within the United States.

SPDX-License-Identifier: Unknown

Modified for liboqs by Douglas Stebila

Appendix I Setting ICSF Permissions in RACF for Cryptographic Hardware Support

To enable cryptographic hardware you need to enable the following CSFSERV profiles for all client, and server IDs in RACF. You can run the first set of commands with the Tectia SSH Assistant ISPF application job 1.5 CSFSERV.

```
SETROPTS CLASSACT(CSFSERV CSFKEYS XCSFKEY)
SETROPTS RAclist(CSFSERV) GENERIC(CSFSERV)
RDEFINE CSFSERV CSFRNG UACC(NONE)
PERMIT CSFRNG CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFIQA UACC(NONE)
PERMIT CSFIQA CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFIQF UACC(NONE)
PERMIT CSFIQF CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1TRC UACC(NONE)
PERMIT CSF1TRC CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1TRD UACC(NONE)
PERMIT CSF1TRD CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1SKE UACC(NONE)
PERMIT CSF1SKE CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1SKD UACC(NONE)
PERMIT CSF1SKD CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFOWH UACC(NONE)
PERMIT CSFOWH CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFCKM UACC(NONE)
PERMIT CSFCKM CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFKPI2 UACC(NONE)
PERMIT CSFKPI2 CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFENC UACC(NONE)
PERMIT CSFENC CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFDEC UACC(NONE)
PERMIT CSFDEC CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFSAD UACC(NONE)
PERMIT CSFSAD CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFSAE UACC(NONE)
```

```

PERMIT CSFSAE CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSFHMG UACC(NONE)
PERMIT CSFHMG CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1GAV UACC(NONE)
PERMIT CSF1GAV CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1DVK UACC(NONE)
PERMIT CSF1DVK CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1GKP UACC(NONE)
PERMIT CSF1GKP CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1PKS UACC(NONE)
PERMIT CSF1PKS CLASS(CSFSERV) ID(*) ACCESS(READ)
RDEFINE CSFSERV CSF1PKV UACC(NONE)
PERMIT CSF1PKV CLASS(CSFSERV) ID(*) ACCESS(READ)
SETROPTS RACLIST(CSFSERV) REFRESH

```

If possible, avoid defining the following SAF/RACF profile. Otherwise you must grant READ access to this profile for all client and server IDs:

```
CLASS(CRYPTOZ) CLEARKEY.SYSTOK-SESSION-ONLY
```

To enable use of IBM Crypto Express Card (CEX) you also need to enable the following CSFSERV profiles for all client and server IDs in RACF:

```

# For Cipher offload to CEX
RDEFINE CSFSERV CSFCKM UACC(NONE)
PERMIT CSFCKM CLASS(CSFSERV) ID(*) ACCESS(READ)

RDEFINE CSFSERV CSFSAD UACC(NONE)
PERMIT CSFSAD CLASS(CSFSERV) ID(*) ACCESS(READ)

RDEFINE CSFSERV CSFSAE UACC(NONE)
PERMIT CSFSAE CLASS(CSFSERV) ID(*) ACCESS(READ)

# For MAC offload to CEX
RDEFINE CSFSERV CSFKPI2 UACC(NONE)
PERMIT CSFKPI2 CLASS(CSFSERV) ID(*) ACCESS(READ)

RDEFINE CSFSERV CSFHMG UACC(NONE)
PERMIT CSFHMG CLASS(CSFSERV) ID(*) ACCESS(READ)
SETROPTS CLASSACT(CSFSERV)
SETROPTS RACLIST(CSFSERV) REFRESH

```

Appendix J Offloading SSSH2 with zIIP

Shifts mainframe z CPACF instructions to zIIP processor, if the processor is available. CPACF instructions are used for 3DES-CBC, AES-CBC, AES-CTR, AES-GCM, HMAC-SHA algorithms.

Perform the following steps in order to enable zIIP processing:

Enable sshd2 program with APF authorized flag by using the command: `extattr +a sshd2` Alternatively do the following modifications in SSZ Assistant installer job `x09LOAD` changing `PGM /bin/extattr +p` into `PGM /bin/extattr +ap`

```
/* Set program-control attribute for server binary
//      IF  RC = 0 THEN
//PCTL      EXEC SSZPBPX
//STDPARM  DD  *
PGM /bin/extattr +ap
/u/vendor/data0/opt/tectia/sbin/sshd2
/* CHANGE THE ABOVE PGM STATEMENT TO PGM /bin/extattr +ap
/*      TO ADD APF attribute for server binary
//      ENDIF
/*
/* log results of previous job steps
//LOG      EXEC PGM=IRXJCL,COND=EVEN,PARM='JOBLOGRX'
//SYSEXEC  DD  DSN=EXAMPLE.SSZ.INSTALL.CNTL,
//          DISP=SHR
//SYSTSPRT DD  DSN=EXAMPLE.SSZ.INSTALL.LOG,
//          DISP=MOD
//SYSTSIN  DD  DUMMY
/*
```

(This change can be reverted by specifying `PGM /bin/extattr -a`)

Update PGM parameter of EXEC statement in SSSH2 started procedure JCL to use BPXBATA8 or follow instructions in sample SSSH2 JCL in SSZ assistant tailored sample DSName (option 0.1). If updating from a previous version be sure to run SSZ Assistant installer job `x13PROC`

*Note!*If the BPXPRG setting is not matched with APF attribute of sshd2, the start of SSSH2 proc will fail.

```
//SSHD2    PROC  OPTS=' '
//*          SET  BPXPRG=BPXBATSL
//* UNCOMMENT BELOW STATEMENT IF sshd2 PROGRAM IS APF AUTHORISED
//          SET  BPXPRG=BPXBATA8
//TECTIA   EXEC  PGM=&BPXPRG,REGION=0M,TIME=NOLIMIT,
//                  PARM=( 'PGM /opt/tectia/sbin/sshd2 -F &OPTS' )
//STDENV   DD   DSN=EXAMPLE.VXXXX.PARMLIB(SSHENV),DISP=SHR
//STDOUT   DD   SYSOUT=*
//*TDERR   DD   SYSOUT=*
//STDIN    DD   DUMMY
//          PEND
```

(To revert these changes, you only need to change comment `PGM=BPXBATA8` and uncomment `PGM=BPXBATSL`)

Index

Symbols

\$HOME/.ssh2, 18, 70
.rhosts, 82, 251–252
.shosts, 82, 251
.ssh2, 254
/opt, 15
/opt/tectia, 18, 70
/opt/tectia/etc, 69, 97
/tmp, 18
, 245–246, 255–256

A

address space, 17
AddressFamily, 181
AF_UNIX socket, 17
agent forwarding, 150
agent forwarding log messages, 264
AllowAgentForwarding, 150, 181
AllowedAuthentications, 102–103, 106, 108, 181
AllowGroups, 83, 181
AllowHosts, 81, 88, 181, 251
AllowSHosts, 182
AllowTcpForwarding, 182
AllowTcpForwardingForGroups, 182
AllowTcpForwardingForUsers, 182
AllowUsers, 82, 182, 250
AnyCipher, 74
AnyHostKeyAlgorithm, 76
AnyKEX, 75
AnyMac, 74
AnyPublicKeyAlgorithm, 78
AnyStdCipher, 74
AnyStdHostKeyAlgorithm, 76
AnyStdKEX, 75
AnyStdMac, 74
AnyStdPublicKeyAlgorithm, 78
application tunneling, 147
audit message reference, 291

auditing, 84, 88, 249
authentication, 95
certificate, 106
Keyboard-Interactive, 111
password, 63, 102, 111
public-key
server, 63, 97
user, 64, 103, 260
SAF key, 101, 108
authentication log messages, 249, 251, 255–257, 260
authentication methods, 95
AuthKbdInt.FailureTimeout, 112
AuthKbdInt.NumOptional, 112, 183
AuthKbdInt.Optional, 112, 183
AuthKbdInt.Plugin, 183
AuthKbdInt.Required, 112
authorization, 105
AuthorizationEkInitStringMapper, 184
AuthorizationEkProvider, 110
AuthorizationFile, 105
AuthorizedKeysFile, 105, 184
AuthPassword.ChangePlugin, 184
AuthPublicKey.Algorithms, 185
AuthPublicKey.Cert.Required, 106, 108, 185
AuthPublicKey.Cert.ValidationMethods, 108, 186
AuthPublicKey.MaxValue, 186
AuthPublicKey.MinValue, 186
auxiliary storage shortage, 156

B

banner message, 88
BannerMessageFile, 186
basic configuration, 69
batch file transfers, 115

C

CA certificate, 106
case-sensitivity, 181
CertdListenerPath, 186
certificate authentication
user, 106
certificate revocation list (CRL), 107, 111

- Certificate Validator, 53, 160
 - querying version, 61
 - restarting, 60
 - setting options for starting, 61
 - starting, 58
 - stopping, 60
- certificate-specific log messages, 264
- certificates
 - enrolling, 100
- certification authority (CA), 99
- changing host key, 98
- character set, 113
- chcp command, 113
- check configuration, 172
- CheckMail, 186
- ChRootGroups, 187
- ChRootUsers, 187
- Ciphers, 73, 187
 - ciphers, 245
 - code page, 113
 - code pages, 83
 - coded character set conversion, 62
 - command accepted, 242, 244
 - command option unrecognised, 242, 244
 - command unrecognised, 242
 - command-line options
 - server, 70
 - common code log messages, 272
 - compression, 246
 - condisp, 116
 - configuration
 - cipher, 73
 - host key signature algorithms, 76
 - KEX, 75
 - MAC, 74
 - public key signature algorithms, 77
 - root logins, 80
 - subconfigurations, 71
 - configuration file
 - ssh-certd, 162–163
 - sshd2, 176
 - configuration files
 - server, 69
 - SOCKS Proxy, 132
 - Connection Broker, 13
 - connections statistics, 246
 - console messages, 241
 - Certificate Validator, 243
 - SOCKS Proxy, 248
 - SSH server, 243
 - controlling file transfer, 116
 - controlling the Certificate Validator, 58
 - cpu limit exceeded, 243
 - CPU time, 156
 - creating file transfer user, 115
 - creating SSHSP user, 137
 - cryptographic algorithms, 73
 - cryptographic hardware support, 78
 - cryptography support log messages, 272
 - customer support, 12
- D**
 - debug level, 152
 - in console, 152
 - in ISPF, 152
 - debugging, 151
 - file transfer, 153
 - sshd2 started task, 152
 - USS shell, 153
 - default configuration file does not exist, 243
 - default configuration files
 - ssh_certd_config, 225
 - sshd2_config, 217
 - denial-of-service attack, 92
 - DenyGroups, 83, 187
 - DenyHosts, 81, 187, 251
 - denying agent forwarding, 150
 - denying connection attempts, 88
 - denying file transfers, 91
 - denying terminal access, 90–91
 - denying tunneling, 90
 - DenySHosts, 188
 - DenyTcpForwardingForGroups, 188
 - DenyTcpForwardingForUsers, 188
 - DenyUsers, 82, 188, 250

directories
\$HOME/.ssh2, 18
/opt, 15
/opt/tectia, 18
/tmp, 18
sample files, 10

directories and data sets, 18
MVS, 19
USS, 18

DisableVersionFallback, 188
disabling root logins, 80
disclaimer before login, 88
disk space requirement, 15
documentation, 9
documentation conventions, 11
dual TCP/IP stack, 235
connecting with Tectia clients, 240
running the server, 235
running the SOCKS Proxy, 236

E

editing configuration files, 70
egrep, 81
character sets, 211
escaped tokens, 209
patterns, 208

Email, 107
EmailRegex, 107
enabling cryptographic hardware support
RACF Commands, 319

encryption algorithm, 73
enrolling host certificate, 100
environment variables, 61
error creating local stream directory, 243
error messages, 151
error on listening tcp port, 243
error situations, 154
event log, 291
EXTENDED, 289
external keys, 170
providers, 170
using, 170

ExternalAuthorizationProgram, 188

F

failed authentication, 249–251
failed to take a socket, 243
fallback to plain FTP, 144
file descriptor, 17
file transfer, controlling, 116
files related to sshd2, 177
fingerprint, 98
firewall, 107, 111
ForwardACL, 91, 188
forwarding
agent, 150
local, 147
remote, 149

FTP
fallback, 144
tunneling, 129

FTP-SFTP conversion, 13, 129
fully qualified domain name (FQDN), 101

G

general server log messages, 273
generating host key, 97

H

hardware requirements, 15
home directory, 16
host certificate
enrolling, 100
host key
changing, 98
generating, 97
multiple, 97
host key algorithms, 245
host key check, disabling, 136
host key I/O log messages, 272
host restrictions, 81
host-based authentication, 251
HostCertificateFile, 101, 189
HostIdMappingHostnames, 110, 189

hostkey, 69, 97
HostKey.Cert.Required, 101–102, 191
 hostkey.pub, 69, 97
HostKeyAlgorithms, 190
HostKeyEkInitString, 102, 190
HostKeyEkProvider, 102, 191
HostKeyFile, 97, 101, 190
HostSpecificConfig, 72, 191

I

icsf random number generator is not available, 243
IdentityDispatchUsers, 191
IdleTimeOut, 192
 incoming tunnels, 147, 149
inetd, 279
INIT, 281
 installation directories, 70
 installing

- Tectia SSH Assistant, 25

 installing Tectia Server for IBM z/OS, 15, 25

- licensing, 19
- permission requirements, 15
- system limits and requirements, 17
- system requirements, 15
- uploading installation files, 19

 invalid access attempt, 242
IPv6 support, 71, 227

K

KeepAlive, 192
KEXs, 75, 192
 key exchange (KEX), 75
 key exchange algorithms, 245
 key fingerprint, 98
 key generation, 97
 key upload log, 245
 Keyboard-Interactive authentication, 111, 255–256

L

LDAPServers, 107, 111
 legal disclaimer, 88
 licensing, 19

line delimiters, 113–114
 listen address, 88
 listen port, 88
ListenAddress, 88, 193
ListenerRetryInterval, 193
 load control, 92
LoadControl.Active, 93, 194
LoadControl.DiscardLimit, 93, 194
LoadControl.WhitelistSize, 93, 194
 local port forwarding, 147
 local tunnels, 147
 log message reference, 291
 log messages

- agent forwarding, 264
- certificates, 264
- common code, 272
- cryptography support, 272
- host key, 272
- host-based authentication, 251
- Keyboard-Interactive, 255–256
- password authentication, 257
- public-key authentication, 260
- server, 273
- session channel, 265
- SFTP, 280
- SSH1 agent, 269
- tunneling, 270
- user authentication, 249

 logging, 84, 88, 157, 249, 291
login

- restricting, 81
- root, 80

 login process, sshd2, 177
LoginGraceTime, 194, 277

M

MACs, 74, 194, 245
 man pages, 159
 man-in-the-middle attack, 99
 manual pages, 50
MapFile, 106, 110
MaxBroadcastsPerSecond, 195

MaxConnections, 93, 195
 maximum tcplistenrate reached, 243
 Message Authentication Code (MAC), 74
 message before login, 88
 migrated data sets, 90
 missing home directory, 251
 modifying configuration files, 70
 multiple host keys, 97
 multiple TCP/IP stack
 connecting with Tectia clients, 240
 running the server, 235
 running the SOCKS Proxy, 236

N

network interface binding, 88
 NoDelay, 195

O

OMVS segment, 16
 OpenSSH, 70
 OpenSSH host key, 98
 OSS licences, 313
 outgoing tunnels, 147

P

PasswdPath, 195
 password authentication, 63, 102, 111, 255, 257
 PasswordApplName, 195
 PasswordGuesses, 196
 pattern matching syntax, 81
 permission requirements, 15
 PermitEmptyPasswords, 196
 PermitRootLogin, 196
 permitting root logins, 80
 PidFile, 196
 PKCS #7 package, 106
 Pki, 106
 PkiEkProvider, 110
 Port, 88, 196
 port forwarding, 147
 local, 147
 remote, 149

port forwarding log messages, 270
 preparing for installation, 15
 PrintMotd, 196
 private key
 host, 97, 101
 problem situations, 154
 process started, 242, 244
 product installation jobs, 34
 ProxyServer, 197
 pseudo-volume, 117
 public-key authentication
 server, 63, 97
 user, 64, 103, 260
 PublicHostKeyFile, 97, 197

Q

QuietMode, 197

R

RACF Commands
 enabling cryptographic hardware support, 319
 RandomSeedFile, 197
 regular expressions (regex), 208
 egrep, 208
 ssh, 212
 syntax, 81
 traditional, 210
 zsh_fileglob, 210
 RekeyIntervalSeconds, 197
 related documents, 9
 reloading the SOCKS Proxy configuration, 140
 remote command, 113
 remote port forwarding, 149
 remote tunnels, 149
 removing Tectia Server for IBM z/OS, 51
 RequiredAuthentications, 197
 RequireReverseMapping, 198, 250
 ResolveClientHostName, 198
 restarting the Certificate Validator, 60
 restarting the server, 56
 restoring archived data sets, 117
 restricting SFTP access, 89

restricting tunneling, 91
 restricting user login, 81
 reverse DNS mapping, 250
 rhosts, 82
 root login, 80
 root login denied, 249
 running the Certificate Validator, 58
 running the server, 54
 running the SOCKS Proxy, 137

S

SAF authentication
 server, 101
 user, 108
 sample files, 10
 scpg3, 13
 secure application connectivity, 147
 secure configuration, 86
 Secure File Transfer Protocol (SFTP), 115
 Secure Shell Certificate Validator, 160
 Secure Shell Daemon, 174
 SerialAndIssuer, 107
 server
 querying version, 57
 restarting, 56
 running on multiple TCP/IP stacks, 235
 setting options for starting, 57
 starting, 54
 starting under USS, 55
 stopping, 55
 stopping under USS, 56
 server authentication
 with public key, 97
 with SAF keys, 101
 server authentication methods, 95
 server banner message, 88
 server certificate, 99
 server configuration, 69, 113
 server configuration files, 69
 server listen address, 88
 server listen port, 88
 server log messages, 273

session channel related log messages, 265
 setsid, 280
 SettableEnvironmentVars, 198
 setting debug level, 152
 setting up a shell user, 62
 Settings for installation input, 31
 Settings for installation output, 34
 sft-server-g3, 83–84, 89, 157
 SFTP log messages, 280
 SFTP subsystem, 89
 sftpg3, 13
 SftpSmfType, 199
 SftpSysLogFacility, 199
 shell access, 113
 shell user, 62
 ShellAccountCodeset, 114, 199
 ShellAccountLineDelimiter, 114, 199
 ShellConvert, 114, 199
 ShellTransferCodeset, 114, 199
 ShellTransferLineDelimiter, 114, 199
 ShellTranslateTable, 114, 200
 shosts, 82
 shosts.equiv, 251
 SIGHUP, 279
 signal 29, 156
 signature algorithms
 host key, 76
 public key, 77
 SIGXCPU, 156
 SMF Auditing, 85
 socket, 17
 SOCKS Proxy, 13, 129, 137
 close connection, 141
 configuring, 132
 connection status, 141
 console messages, 248
 list channels, 141
 list connections, 141
 querying version, 140
 reloading configuration, 140
 running as started task, 137
 running on multiple TCP/IP stacks, 236
 setting options for starting, 140

- starting, 138
- status, 141
- stopping, 139
- SocksServer, 107, 111, 200
- ssh (regex), 212
- ssh-broker-config.xml
 - strict-host-key-checking, 99
- ssh-broker-ctl, 12
- ssh-broker-g3, 12
- ssh-certd, 14, 53, 160
 - configuration file, 162–163
 - options, 161
 - querying version, 61
 - restarting, 60
 - setting options for starting, 61
 - starting, 58
 - stopping, 60
- ssh-cmpclient-g3, 101
- ssh-dummy-shell, 169
- ssh-externalkeys, 170
- ssh-keydist-g3, 136
- ssh-keygen-g3, 64, 97
- ssh-scepclient-g3, 101
- ssh-socks-proxy, 137
 - querying version, 140
 - setting options for starting, 140
 - starting, 138
 - stopping, 139
- ssh-socks-proxy-config.xml, 132
 - default-settings, 134
 - filter-engine, 135
 - profiles, 134
 - static-tunnels, 135
- ssh-socks-proxy-ctl, 137
- SSH1 agent forwarding log messages, 269
- ssh_certd_config, 69, 81, 163, 225
- ssh_certd_config keyword
 - Cert.DODPKI, 163
 - CertCacheFile, 163
 - CrlAutoUpdate, 163
 - CrlPrefetch, 163
 - ExternalMapper, 163
 - ExternalMapperTimeout, 164
- HostCA, 164
- HostCAEkProvider, 164
- HostCAEkProviderNoCRLs, 164
- HostCANoCRLs, 164
- LdapServers, 165
- MapFile, 106, 165
- OCSPResponderURL, 165
- PidFile, 165
- Pki, 106, 165
- PkiDisableCrls, 166
- PkiEkProvider, 110, 166
- QuietMode, 166
- RandomSeedFile, 166
- SocksServer, 166
- SysLogFacility, 167
- UseSocks5, 167
- UseSSHD2ConfigFile, 167
- VerboseMode, 167
 - WTORoutingCodes, 167
- ssh_channel_request_env, 267
- SSH_FXP_CLOSE, 282
- SSH_FXP_EXTENDED, 284
- SSH_FXP_FSETSTAT, 283
- SSH_FXP_FSTAT, 282
- SSH_FXP_INIT, 281, 284
- SSH_FXP_LSTAT, 282
- SSH_FXP_MKDIR, 283
- SSH_FXP_OPEN, 281
- SSH_FXP_OPENDIR, 283
- SSH_FXP_READDIR, 283
- SSH_FXP_READLINK, 284
- SSH_FXP_REALPATH, 284
- SSH_FXP_REMOVE, 283
- SSH_FXP_RENAME, 284
- SSH_FXP_RMDIR, 283
- SSH_FXP_SETSTAT, 282
- SSH_FXP_STAT, 282
- SSH_FXP_SYMLINK, 284
- SSH_SFT_PSEUDOVOLUME_VOLSER, 117
- SSHCERTD, 58
- sshd-check-conf, 172
 - behavior, 172
 - examples, 173

options, 172
sshd2, 14, 53, 174
 advanced configuration, 205
 configuration file, 176
 configuration file format, 180
 files, 177
 login process, 177
 options, 175
 querying version, 57
 restarting, 56
 setting options for starting, 57
 starting, 54
 stopping, 55
SSHD2, 54
sshd2_config, 69, 73–77, 81, 180, 217
sshd2_config keyword
 AddressFamily, 181
 AllowAgentForwarding, 150, 181
 AllowedAuthentications, 102–103, 106, 108, 181
 AllowGroups, 181
 AllowHosts, 181
 AllowSHosts, 182
 AllowTcpForwarding, 182
 AllowTcpForwardingForGroups, 182
 AllowTcpForwardingForUsers, 182
 AllowUsers, 182
 AuthInteractiveFailureTimeout, 182
 AuthKbdInt.FailureTimeout, 112
 AuthKbdInt.NumOptional, 112, 183
 AuthKbdInt.Optional, 112, 183
 AuthKbdInt.Plugin, 183
 AuthKbdInt.Required, 112, 183
 AuthKbdInt.Retries, 183
 AuthorizationEkInitStringMapper, 184
 AuthorizationEkInitStringMapperTimeout, 184
 AuthorizationEkProvider, 110, 183
 AuthorizationFile, 184
 AuthorizedKeysFile, 105, 184
 AuthPassword.ChangePlugin, 184
 AuthPublicKey.Algorithms, 185
 AuthPublicKey.Cert.Required, 106, 108, 185
 AuthPublicKey.Cert.ValidationMethods, 108, 186
 AuthPublicKey.MaxValue, 186
 AuthPublicKey.MinSize, 186
 BannerMessageFile, 186
 CertdListenerPath, 186
 CheckMail, 186
 ChRootGroups, 187
 ChRootUsers, 187
 Ciphers, 187
 DenyGroups, 187
 DenyHosts, 187
 DenySHosts, 188
 DenyTcpForwardingForGroups, 188
 DenyTcpForwardingForUsers, 188
 DenyUsers, 188
 DisableVersionFallback, 188
 ExternalAuthorizationProgram, 188
 ForwardACL, 188
 ForwardAgent, 181
 HostCertificateFile, 101, 189
 HostIdMappingHostnames, 110, 189
 HostKey.Cert.Required, 101–102, 191
 HostKeyAlgorithms, 190
 HostKeyEkInitString, 102, 190
 HostKeyEkProvider, 102, 191
 HostKeyFile, 97, 101, 190
 HostSpecificConfig, 191
 IdentityDispatchUsers, 191
 IdleTimeOut, 192
 KeepAlive, 192
 KEXs, 192
 ListenAddress, 193
 ListenerRetryInterval, 193
 LoadControl.Active, 194
 LoadControl.DiscardLimit, 194
 LoadControl.WhitelistSize, 194
 LoginGraceTime, 194
 MACs, 194
 MaxBroadcastsPerSecond, 195
 MaxConnections, 195
 NoDelay, 195
 PasswdPath, 195
 PasswordApplName, 195
 PasswordGuesses, 196
 PermitEmptyPasswords, 196

PermitRootLogin, 196	options, 206
PidFile, 196	SSHENV, 61
Port, 196	sshg3, 13
PrintMotd, 196	sshregex, 208
ProxyServer, 197	sshsetenv, 61
PublicHostKeyFile, 197	SSHSP user, creating, 137
QuietMode, 197	SSZ0001I, 242
RandomSeedFile, 197	SSZ0002W, 242
RekeyIntervalSeconds, 197	SSZ0003I, 242
RequiredAuthentications, 197	SSZ0004I, 242
RequireReverseMapping, 198	SSZ0005I, 242
ResolveClientHostName, 198	SSZ0006I, 242
SettableEnvironmentVars, 198	SSZ0007W, 242, 244
SftpDNSAllocWTO, 198	SSZ0008I, 242
SftpExit, 199	SSZ0009I, 242
SftpSmfType, 199	SSZ0010W, 242
SftpSysLogFacility, 199	SSZ0011W, 243
ShellAccountCodeset, 114, 199	SSZ0012W, 243
ShellAccountLineDelimiter, 114, 199	SSZ0013W, 243
ShellConvert, 114, 199	SSZ0014E, 243
ShellTransferCodeset, 114, 199	SSZ0015E, 243
ShellTransferLineDelimiter, 114, 199	SSZ0016E, 243
ShellTranslateTable, 114, 200	SSZ0017E, 243
SocksServer, 200	SSZ0018E, 243
StrictModes, 200	SSZ0019E, 243
StrictModes.UserDirMaskBits, 200	SSZ3001I, 244
Subsystem-<subsystem name>, 83, 116–117, 200	SSZ3002W, 244
SysLogFacility, 200	SSZ3003I, 244
TcpListenBacklog, 200	SSZ3004I, 244
TcpListenPause, 201	SSZ3005I, 244
TcpListenRate, 201	SSZ3006I, 244
Terminal.AllowGroups, 202	SSZ3008I, 244
Terminal.AllowUsers, 201	SSZ3009I, 244
Terminal.DenyGroups, 202	SSZ3010W, 244
Terminal.DenyUsers, 201	SSZ3011W, 244
UseCryptoHardware, 202	SSZ3012W, 245
UserConfigDirectory, 203	SSZ3013I, 245
UserSpecificConfig, 203	SSZ3014I, 245
UseSocks5, 203	SSZ3015I, 245
VerboseMode, 203	SSZ3016I, 245
WTORoutingCodes, 203	SSZ3017I, 245
ZcpuMathFacility, 204	SSZ3018I, 245
sshd2_subconfig, 205	SSZ3019I, 245

SSZ3020I, 245
SSZ3023I, 245
SSZ3025I, 245
SSZ3026I, 245
SSZ3027I, 245
SSZ3028I, 245
SSZ3029I, 246
SSZ3030I, 246
SSZ3031I, 246
SSZ3032I, 246
SSZ3033I, 246
SSZ3034I, 246
SSZ3035I, 246
SSZ3036I, 247
SSZ3037I, 247
SSZ3038I, 247
SSZ3039I, 247
SSZ3040I, 247
SSZ3041I, 247
SSZ3042E, 248
SSZ3043E, 248
SSZ3044E, 248
SSZ3045I, 248
SSZ3046E, 248
SSZ3047I, 248
SSZ3048I, 248
SSZ3049I, 248
SSZ3050E, 243, 248
SSZ3051E, 248
SSZ3052E, 248
SSZ3053E, 248
SSZASST client jobs generator, 119
staging, 117
starting the server, 54
 under USS, 55
starting the SOCKS Proxy, 138
stopping the Certificate Validator, 60
stopping the server, 55
 under USS, 56
stopping the SOCKS Proxy, 139
storing remote host keys, 136
strict-host-key-checking, 99
StrictModes, 200, 252
StrictModes.UserDirMaskBits, 200
subconfigurations, 71
Subject, 107
SubjectRegex, 107
subsystem, 83
Subsystem-<subsystem name>, 200
subsystem-sftp, 89, 116–117
support, 12
symmetric encryption, 73
syslog, 84, 88, 157
SysLogFacility, 200
system configuration, 69
system configuration file, 245
system limits and requirements, 17
system log, 88
System Management Facilities (SMF), 85
system requirements, 15

T

task ssh-socks-proxy started, 244
task started, 242
TCP wrappers, 278
TcpListenBacklog, 200
TcpListenPause, 201
TcpListenRate, 201
technical support, 12
Tectia client tools for z/OS, 13
Tectia Server for IBM z/OS, 14
Tectia SSH Assistant, 14
 generating product installation jobs, 34
 installation settings, 27
 installing, 25
 running product installation jobs, 38
terminal data conversion, 114
Terminal.AllowGroups, 202
Terminal.AllowUsers, 201
Terminal.DenyGroups, 90, 202
Terminal.DenyUsers, 92, 201
terminology, 12
timestamp, 157
TN3270, 149
trace level, 152

transparent FTP tunneling, 129

transparent TCP tunneling, 149

troubleshooting, 151

tunneling, 147

access control, 91

agent, 150

local, 147

remote, 149

TN3270, 149

transparent FTP, 129

tunneling log messages, 270

tunnels

local (outgoing), 147

remote (incoming), 149

TZ, 157

U

ultimately restricted shell, 169

uninstalling Tectia Server for IBM z/OS, 51

upgrading Tectia Server for IBM z/OS, 21

uploading installation files, 19

UseCryptoHardware, 78, 202

user authentication

with certificates, 106

with Keyboard-Interactive, 111

with password, 63, 102

with public key, 64, 103

with SAF keys, 108

user authentication log messages, 249, 251, 255–257,

260

user authentication methods, 95

user login, restricting, 81

user name, 81

user requirements, 16

user restrictions, 81

UserConfigDirectory, 203

UserSpecificConfig, 73, 203

UseSocks5, 203

USS, 55–56

V

VerboseMode, 203

version, 242, 244

Certificate Validator, 61

server, 57

SOCKS Proxy, 140

version control information

branch, 242, 244

revision, 242, 244

virtual storage limit, 157

volume serial number, 117

W

well-known port, 147

white list, 92

Workload Manager (WLM), 17

WTORoutingCodes, 167, 203

X

X.509 certificates, 100, 106

Z

ZcpuMathFacility, 204

zos-saf provider, 170

zsh_fileglob, 81

character sets, 211

patterns, 210

